

NACOMATIC

Effective: 08-April-2010

Expires: 06-May-2010

Your Ad Here

~ 100,000 Page views/month

Contact:

Doug Ranz

248-318-0011

NACOMATIC@hotmail.com

Warranty

I make absolutely no warranty nor guarantee whatsoever about the accuracy, availability, applicability and/or correctness of any of the information in this document.

The official, original NACO documents are available for your downloading pleasure from: <http://naco.faa.gov/index.asp?xml=naco/onlineproducts>

Copyright

This compilation is protected by US copyright laws and international copyright treaties.

Limitations

The sale, hosting and/or distribution of this document in any and all forms, is prohibited.

Release from Liability

All users of this compilation must agree to be legally bound hereby, that Douglas R. Ranz ("Released Party") SHALL NOT BE LIABLE FOR MY DEATH OR INJURY TO MY PERSON, OR FOR ANY LOSS FOR DAMAGE TO MY PROPERTY OR REPUTATION caused in any manner whatsoever, whether attributable to the negligence of the Released Party, or for any other reason, occurring during the time that I am operating an aircraft.

I do hereby waive any right of action against the Released Party from any and all causes or claims that I may have against them from the beginning of time. I further agree not to sue on any such cause or claim. This agreement shall not release liability for gross negligence or willful misconduct of the Released Party. I agree to indemnify and hold the Released Party harmless for any losses, judgments, damages or fees he may incur, including but not limited to attorneys fees, arising out any lawsuit related to the planning, flight and/or enforcement of or legal challenge to this agreement. It is my intention that this agreement be interpreted and enforced to the maximum extent allowed by Michigan law.

WY Min Alt#1	-	5
WY Min Rdr#1	-	13
WY Min TO#1	-	16
7V6	-	87
AFO	-	39
BPI	-	43
BYG	-	45
COD	-	66
CPR	-	47
CYS	-	58
DGW	-	70
EAN	-	138
ECS	-	110
EMM	-	102
EVW	-	72
FBR	-	77
GCC	-	79
GEY	-	84
JAC	-	90
LAR	-	105
PNA	-	111
POY	-	114
RIW	-	117
RKS	-	122
RWL	-	115
SAA	-	128
SHR	-	130
TOR	-	134
U68	-	69
W43	-	89
WRL	-	139

WY Mins - Alternates #1	-	5
WY Mins - Radar #1	-	13
WY Mins - Take-Off #1	-	16
AFTON	AFO	- 39
BIG PINEY	BPI	- 43
BUFFALO	BYG	- 45
CASPER	CPR	- 47
CHEYENNE	CYS	- 58
CODY	COD	- 66
COWLEY-LOVELL-BYRON	U68	- 69
DOUGLAS	DGW	- 70
EVANSTON	EVW	- 72
FORT BRIDGER	FBR	- 77
GILLETTE	GCC	- 79
GREYBULL	GEY	- 84
GUERNSEY	7V6	- 87
HULETT	W43	- 89
JACKSON	JAC	- 90
KEMMERER	EMM	- 102
LARAMIE	LAR	- 105
NEWCASTLE	ECS	- 110
PINEDALE	PNA	- 111
POWELL	POY	- 114
RAWLINS	RWL	- 115
RIVERTON	RIW	- 117
ROCK SPRINGS	RKS	- 122
SARATOGA	SAA	- 128
SHERIDAN	SHR	- 130
TORRINGTON	TOR	- 134
WHEATLAND	EAN	- 138
WORLAND	WRL	- 139

INSTRUMENT APPROACH PROCEDURE CHARTS

IFR ALTERNATE AIRPORT MINIMUMS

Standard alternate minimums for non precision approaches are 800-2 (NDB, VOR, LOC, TACAN, LDA, VORTAC, VOR/DME, ASR or WAAS LNAV); for precision approaches 600-2 (ILS or PAR). Airports within this geographical area that require alternate minimums other than standard or alternate minimums with restrictions are listed below. NA - means alternate minimums are not authorized due to unmonitored facility or absence of weather reporting service. Civil pilots see FAR 91. IFR Alternate Airport Minimums: Ceiling and Visibility Minimums not applicable to USA/USN/USAF. Pilots must review the IFR Alternate Airport Minimums Notes for alternate airfield suitability.

NAME ALTERNATE MINIMUMS

ALBANY, OR

ALBANY MUNI **VOR/DME or GPS-A**
 NA except for operators with approved weather reporting service.

ARLINGTON, WA

ARLINGTON MUNI **NDB or GPS Rwy 34**
 Category D, 800-2½.
 NA when Paine Field control tower closed.

ASTORIA, OR

ASTORIA RGNL **RNAV (GPS) Rwy 26¹²**
VOR Rwy 8³

- ¹NA when local weather not available.
- ²Categories A, B, 900-2; Category C, 900-2¾; Category D, 900-3.
- ³Category C, 800-2¾; Category D, 900-3.

AURORA, OR

AURORA STATE **LOC Rwy 17¹**
RNAV (GPS) Rwy 17²³
RNAV (GPS) Rwy 35²

- ¹Category D, 800-2½.
- ²NA when local weather not available.
- ³Categories A, B, 900-2; Category C, 900-2¾; Category D, 900-2¾.

BAKER, MT

BAKER MUNI **NDB Rwy 13¹**
NDB Rwy 31²

- ¹Categories A,B, 1100-2; Categories C,D, 1100-3.
- ²Categories A,B, 1000-2; Category C, 1000-2¾; Category D, 1000-3.

BAKER CITY, OR

BAKER CITY MUNI **RNAV (GPS) Rwy 13¹²**
VOR-A¹³
VOR/DME Rwy 13²⁴

- ¹NA when local weather not available.
- ²Category D, 900-2¾.
- ³Categories A,B, 1900-2; Categories C,D, 1900-3.
- ⁴NA when control zone not in effect.

NAME ALTERNATE MINIMUMS

BELLINGHAM, WA

BELLINGHAM INTL **ILS or LOC Rwy 16**
RNAV (GPS) Rwy 16
 NA when local weather not available.

BIG PINEY, WY

MILEY MEMORIAL FIELD **VOR Rwy 31**
 Category D, 800-2½.

BILLINGS, MT

BILLINGS LOGAN
 INTL **NDB Rwy 10L¹**
RNAV (GPS) Rwy 10L²
RNAV (GPS) Rwy 28R³

- ¹Category D, 800-2½.
- ²Categories A,B,C,D, 800-2½.
- ³Categories A,B, 900-2; Categories C,D, 900-3.

BOISE, ID

BOISE AIR TERMINAL(GOWEN
 FIELD) **LOC BC Rwy 28L**
RNAV (GPS) Y Rwy 10R
RNAV (GPS) Y Rwy 28L
VOR/DME or TACAN Rwy 10L
VOR/DME or TACAN Rwy 28L

Category E, 1000-3.

BOZEMAN, MT

GALLATIN FIELD **VOR Rwy 12**
 Category C, 800-2¾; Category D, 800-2½.

BREMERTON, WA

BREMERTON NATIONAL .. **RNAV (GPS) Rwy 1**
RNAV (GPS) Rwy 19¹

- NA when local weather not available.
- ¹Categories A,B, 1200-2; Categories C,D, 1200-3.



ALTERNATE MINS

E2



NAME ALTERNATE MINIMUMS

BUFFALO, WY

JOHNSON COUNTY **RNAV (GPS) Rwy 31¹**
VOR/DME Rwy 31²

NA when local weather not available.

¹Category D, 800-2¼.

²Category C, 800-2¼; Category D, 800-2½.

BURLEY, ID

BURLEY MUNI **VOR-A**
VOR/DME-B

NA when local weather not received.

BURLINGTON/MOUNT VERNON, WA

SKAGIT RGNL **NDB Rwy 10¹**
RNAV (GPS) Rwy 10
RNAV (GPS) Rwy 28

NA when local weather not available.

¹Categories A,B, 1300-2; Categories C,D, 1300-3.

BURNS, OR

BURNS MUNI **VOR Rwy 30¹**

Categories A, B, 1400-2; Categories C,D, 1400-3.

BUTTE, MT

BERT MOONEY **ILS Y Rwy 15¹**
LOC/DME Rwy 15²
RNAV (GPS) Y Rwy 15³
RNAV (GPS) Z Rwy 15,1200-2
VOR or GPS-B,1400-3
VOR/DME or GPS-A,3000-3

¹Categories A, B, C, 1200-4.

²Categories A,B, 1300-2; Categories C,D, 1300-3.

³Categories A,B, 1500-2; Categories C,D, 1500-3.

CALDWELL, ID

CALDWELL
INDUSTRIAL **RNAV (GPS) Rwy 12**
RNAV (GPS) Rwy 30

NA when local weather not available.

CASPER, WY

CASPER/NATRONA
COUNTY INTL **ILS or LOC Rwy 3**
ILS, Categories A,B, 800-2; Category C 800-2½; Category D, 800-2¾; Category E, 900-3.
LOC, Category C, 800-2½; Category D, 800-2¾; Category E, 900-3.

NAME ALTERNATE MINIMUMS

CHEYENNE, WY

CHEYENNE RGNL/JERRY OLSON
FIELD **ILS or LOC Rwy 27¹**
NDB Rwy 27¹
RNAV (GPS) Rwy 9²
RNAV (GPS) Rwy 13²
RNAV (GPS) Rwy 31²

¹NA when control tower closed.

²NA when local weather not available.

CODY, WY

YELLOWSTONE
REGIONAL **RNAV (GPS) Rwy 22¹**
VOR or GPS-A²

¹Category C, 800-2¼; Category D, 200-2¾.

²Category D, 900-3.

COEUR D'ALENE, ID

COEUR D'ALENE-PAPPY
BOYINGTON FIELD **ILS or LOC/DME Rwy 5**
NDB Rwy 5
RNAV (GPS) Rwy 5
VOR Rwy 5
VOR/DME Rwy 1

NA when local weather not available.

CORVALLIS, OR

CORVALLIS MUNI **VOR-A**
Categories A,B,1200-2; Categories C,D, 1200-3.

DEER PARK, WA

DEER PARK **RNAV (GPS) Rwy 34**
NA when local weather not available.

DILLON, MT

DILLON **VOR or GPS-A,1500-3**
VOR/DME or GPS-B
NA when Dillon altimeter setting not available.

DOUGLAS, WY

CONVERSE COUNTY **VOR Rwy 29**
Categories A,B, 1100-2; Categories C,D, 1100-3. DME standard.

EASTSOUND, WA

ORCAS ISLAND **RNAV (GPS)-A**
Categories A, B, 1100-2.
NA when local weather not available.

ELLENSBURG, WA

BOWERS FIELD **RNAV (GPS) Rwy 25¹**
RNAV (GPS) Rwy 29
VOR-B²

NA when local weather not available.

¹Category D, 800-2¼.

²Category A, 1500-2.

08 APR 2010 to 06 MAY 2010

NAME ALTERNATE MINIMUMS

EPHRATA, WA

EPHRATA MUNI RNAV (GPS) Rwy 3¹
RNAV (GPS) Rwy 2¹²
VOR/DME Rwy 3¹
VOR Rwy 2¹¹

NA when local weather not available.
¹Category D, 1300-3.
²Category C, 800-2¼; Category D, 1300-3.

EUGENE, OR

MAHLON-SWEET
FIELD ILS or LOC/DME Z Rwy 16R¹
ILS or LOC Y Rwy 16R¹
ILS or LOC/DME Rwy 16L¹²
RNAV (GPS) Rwy 34R²
VOR or GPS-A³

¹NA when control tower closed.
²NA when local weather not available.
³Categories A,B, 900-2; Category C, 900-2½;
Category D, 900-2¾.

EVANSTON, WY

EVANSTON-UINTA COUNTY
BURNS FIELD ILS or LOC/DME Rwy 23
Categories C,D, 700-2.

EVERETT, WA

SNOHOMISH COUNTY(PAINE
FIELD) ILS or LOC/DME Rwy 16R
NA when control tower closed.
NA when local weather not available.

FORT BENTON, MT

FORT BENTON RNAV (GPS) Rwy 23
NA when local weather not available.

GILLETTE, WY

GILLETTE-CAMPBELL
COUNTY ILS or LOC Rwy 34¹²
RNAV (GPS) Rwy 16³
RNAV (GPS) Rwy 34⁴
VOR/DME Rwy 16⁵
VOR/DME Rwy 34¹

¹Categories A,B, 900-2; Category C, 900-2½;
Category D, 1000-3.
²NA when control tower closed.
³Categories A,B,C, 800-2¼; Category D,
1000-3.
⁴Categories A,B,C,D, 1200-4.
⁵Category C, 800-2¼; Category D, 1000-3.

GLASGOW, MT

WOKAL FIELD/
GLASGOW INTL VOR Rwy 12
Categories A,B, 900-2; Categories C,D, 900-3.
VOR/DME standard.

NAME ALTERNATE MINIMUMS

GLENDIVE, MT

DAWSON
COMMUNITY NDB or GPS Rwy 12,900-2¾

GOODING, ID

GOODING MUNI RNAV (GPS) Rwy 7
RNAV (GPS) Rwy 25
NA when local weather not available.

GRAY AAF (KGRF)

FORT LEWIS, WA NDB Rwy 15
NDB Rwy 33
ILS or LOC Rwy 15
COPTER NDB Rwy 15
NA when control tower closed.

GREAT FALLS, MT

GREAT FALLS INTL NDB Rwy 34
Category D, 800-2¼.

GREYBULL, WY

SOUTH BIG HORN COUNTY RNAV (GPS)-A
RNAV (GPS) Rwy 33¹
NA when local weather not available.
¹Category D, 1200-3.

HAILEY, ID

FRIEDMAN
MEMORIAL RNAV (GPS) W Rwy 31
Categories A,B, 1900-2; Category C, 1900-3.

HAVRE, MT

HAVRE CITY-COUNTY VOR Rwy 26
Categories A, B, 900-2; Category C, 900-2¾;
Category D, 900-3.

08 APR 2010 to 06 MAY 2010



ALTERNATE MINS



NAME ALTERNATE MINIMUMS

HELENA, MT

HELENA RGNL ILS or LOC Y Rwy 27¹²
 ILS or LOC Z Rwy 27¹²
 LOC/DME BC-C¹³
 NDB-D¹⁴
 RNAV (GPS) Y Rwy 9⁵
 RNAV (GPS) Rwy 23⁶
 RNAV (GPS) X Rwy 27⁵
 RNAV (RNP) Z Rwy 9⁷
 RNAV (RNP) Y Rwy 27⁷
 RNAV (RNP) Z Rwy 27⁷⁹
 VOR-A⁸
 VOR/DME-B⁶

- ¹NA when control tower closed.
- ²Categories A, B, 1600-2; Categories C, D, E, 1600-3.
- ³Categories A, B, 1300-2; Categories C, D, 1300-3.
- ⁴Category A, 1200-2.
- ⁵Categories A, B, 1600-2; Categories C, D, 1600-3.
- ⁶Categories A, B, 900-2; Category C, 900-2¾; Category D, 900-3.
- ⁷NA when local weather not available.
- ⁸Categories A, B, 2900-2; Categories C, D, 2900-3.
- ⁹1000-4.

HOQUIAM, WA

BOWERMAN RNAV (GPS) Rwy 24¹
 VOR/DME Rwy 24²
 VOR Rwy 6¹

- ¹Category D, 800-2¼.
- ²Categories A,B, 900-2; Category C, 900-2¾; Category D, 900-3.

IDAHO FALLS, ID

IDAHO FALLS RGNL ILS or LOC Rwy 20¹
 LOC BC Rwy 2²
 RNAV (GPS) Rwy 20³
 VOR Rwy 20³

- ¹ILS, Category E, 700-2½. LOC, Category E, 800-2½.
- ²Category E, 800-2½.
- ³NA when local weather not available.

JACKSON, WY

JACKSON HOLE RNAV (GPS) X Rwy 1¹
 RNAV (GPS) Y Rwy 19¹
 RNAV (RNP) Y Rwy 1, 10681200-4
 VOR/DME Rwy 1²
 VOR/DME Rwy 19³

- ¹Categories A,B, 1200-2; Categories C,D, 1200-3.
- ²Categories A,B,1000-2; Categories C,D, 1000-3.
- ³Categories A,B,1400-2; Categories C,D, 1400-3.

NAME ALTERNATE MINIMUMS

JEROME, ID

JEROME COUNTY RNAV (GPS) Rwy 9
 RNAV (GPS) Rwy 27¹
 VOR/DME-A

- NA when local weather not available.
- ¹Categories A, B, 1300-2; Categories C, D, 1300-3.

JOHN DAY, OR

GRANT COUNTY RGNL/
 OGILVIE FIELD RNAV (GPS) Y Rwy 9
 Category B, 900-2; Category C, 900-2½.

KALISPELL, MT

GLACIER PARK INTL ILS or LOC Rwy 2¹
 RNAV (RNP) Y Rwy 2²
 RNAV (RNP) Rwy 20, 800-2½²

- ¹Categories C, D, 700-2.
- ²NA when local weather not available.

KELSO, WA

SOUTHWEST
 WASHINGTON RGNL RNAV (GPS) Rwy 12
 Categories A, B, 900-2.

KLAMATH FALLS, OR

KLAMATH FALLS ILS or LOC Rwy 32¹
 RNAV (GPS) Rwy 14²
 VOR/DME or TACAN Rwy 14³
 VOR/DME or TACAN Rwy 32⁴
 VOR or GPS-B,2100-3

- ¹Categories A,B, 900-2; Category C, 900-2¾; Category D, 1000-3. LOC, DME required.
- ²Categories A,B, 900-2; Category C, 900-2¾; Category D, 1000-3.
- ³Categories C,D, 1000-3; Category E, NA.
- ⁴Category B, 900-2; Categories C,D, 1000-3; Category E, 1500-3.

LAKEVIEW, OR

LAKE COUNTY VOR/DME-A
 Categories A,B, 900-2; Category C, 900-2½;
 Category D, 900-2¾.

LEWISTON, ID

LEWISTON-NEZ PERCE
 COUNTY ILS Rwy 26¹²
 RNAV (GPS) Rwy 8³
 RNAV (GPS) Rwy 12³
 RNAV (GPS) Rwy 26³
 VOR Rwy 8⁴
 VOR Rwy 26³

- ¹ILS, Category D, 800-2¼.
- ²NA when control tower closed.
- ³Category D, 800-2¼.
- ⁴Categories A, B, 1100-2; Categories C, D, 1100-3.

ALTERNATE MINS



NAME ALTERNATE MINIMUMS
LEWISTOWN, MT
 LEWISTOWN MUNI RNAV (GPS) Rwy 7
 VOR Rwy 7
 Category D, 800-2½.

LIVINGSTON, MT
 MISSION FIELD VOR/DME-B¹
 VOR-A²
¹Categories A, B, 900-2; Category C, 900-2½;
 Category D, 1000-3.
²Categories A, B, 2200-2; Categories C, D,
 2200-3.

MC CALL, ID
 MC CALL MUNI RNAV (GPS) Rwy 16¹
 RNAV (GPS) Y Rwy 34²
 RNAV (GPS) Z Rwy 34^{3,4}
¹Category C, 900-2½.
²Categories A, B, 1600-2; Categories C, D,
 1600-3.
³NA when local weather not available.
⁴Category C, 900-2½; Category D, 1000-3.

MC MINNVILLE, OR
 MC MINNVILLE MUNI ILS or LOC Rwy 22
 RNAV (GPS) Rwy 4
 RNAV (GPS) Rwy 22
 VOR/DME-B
 NA when local weather not available.
 Category D 800-2½.

MEDFORD, OR
 ROGUE VALLEY INTL-
 MEDFORD ILS or LOC/DME Rwy 14^{1,2}
 LOC/DME BC-B^{2,3}
 RNAV (GPS)-D³
 RNAV (GPS) Rwy 14⁴
 VOR-A⁵
 VOR/DME-C³
 VOR/DME Rwy 14⁵
¹ILS, Categories A, B, C, 700-2; Category D,
 900-2½. LOC, Category D, 900-2½.
²NA when control tower closed.
³Categories A, B, 2300-2; Categories C, D,
 2300-3.
⁴Categories A, B, 1100-2; Categories C, D,
 1100-3.
⁵Categories A, B, 1400-2; Category C, D
 1400-3.

NAME ALTERNATE MINIMUMS
MISSOULA, MT
 MISSOULA INTL ILS Rwy 11¹
 RNAV (GPS) Y Rwy 11^{2,3}
 RNAV (RNP) Z Rwy 11^{2,3},800-2½
 VOR/DME or GPS-A,2000-3
 VOR/DME or GPS-B,2000-3
¹ILS, 1600-6. LOC,NA.
²NA when local weather not available.
³Categories A, B, 1900-2; Categories C, D,
 1900-3.

MOSES LAKE, WA
 GRANT COUNTY INTL ... ILS or LOC Rwy 32R¹
 NDB Rwy 32R²
 RNAV (GPS) Rwy 4¹
 RNAV (GPS) Rwy 14L¹
 RNAV (GPS) Rwy 22¹
 VOR Rwy 4²
 VOR -1 Rwy 14L²
 VOR -3 Rwy 14L²
 VOR Rwy 22²
 VOR Rwy 32R²
¹NA when local weather not available.
²NA when control tower closed.

NEWCASTLE, WY
 MONDELL FIELD VOR or GPS Rwy 31
 NA except for operators with approved weather
 reporting service.
 Categories A,B, 900-2;Categories C,D, 900-3.

NORTH BEND, OR
 SOUTHWEST OREGON
 RGNL ILS or LOC Rwy 4¹
 NDB or GPS Rwy 4²
 VOR or GPS-A³
 VOR/DME or GPS-B⁴
 VOR/DME Rwy 4⁴
¹ILS,Categories A,B, 800-2; Category C, 900-
 2½, Category D,1000-3. LOC, Category C,
 900-2½, Category D,1000-3.
²Category C, 900-2½;Category D, 1000-3.
³Categories A,B, 1100-2; Categories C,D,
 1100-3.
⁴Categories C,D, 1000-3.

OAK HARBOR, WA
 AJ EISENBERG RNAV (GPS) Rwy 7
 NA when local weather not available.

OLYMPIA, WA
 OLYMPIA RGNL ILS or LOC Rwy 17^{1,2,3}
 RNAV (GPS) Rwy 17²
 RNAV (GPS) Rwy 35²
 VOR-A^{2,4}
 VOR/DME Rwy 35²
¹ILS, Categories C, D, 700-2.
²NA when local weather not available.

ALTERNATE MINS



NAME ALTERNATE MINIMUMS

ONTARIO, OR

ONTARIO MUNI RNAV (GPS) Rwy 14
RNAV (GPS) Rwy 32

NA when local weather not available.

PASCO, WA

TRI-CITIES ILS or LOC Rwy 21R¹²
RNAV (GPS) Rwy 3L
RNAV (GPS) Rwy 12
RNAV (GPS) Rwy 21R
RNAV (GPS) Rwy 30
VOR Rwy 21R³
VOR/DME Rwy 30

NA when local weather not available.

¹NA when control tower closed.

²ILS, Category A,B,C, 700-2; Category D, 700-2½. LOC, Category D, 800-2½.

³Category D, 800-2½.

PENDLETON, OR

EASTERN OREGON RGNL AT
PENDLETON ILS or LOC/DME Rwy 25¹
RNAV (GPS) Rwy 7
RNAV (GPS) Rwy 11
RNAV (GPS) Rwy 25
RNAV (GPS) Rwy 29
VOR Rwy 7

NA when local weather not available.

¹ILS, NA when control tower closed.

PINEDALE, WY

PINEDALE/RALPH WENZ
FIELD NDB-A¹
RNAV (GPS) Rwy 11²
RNAV (GPS) Rwy 29²

NA when local weather not available.

¹Category C, 800-2½; Category D, 800-2½.

²Category D, 800-2½.

POCATELLO, ID

POCATELLO RGNL ILS or LOC Rwy 21¹
RNAV (GPS) Rwy 3²
RNAV (GPS) Rwy 21²

¹NA when control zone not in effect.

²NA when local weather not available.

PORT ANGELES, WA

WILLIAM R
FAIRCHILD INTL ILS or LOC Rwy 8
RNAV (GPS) Rwy 8¹
RNAV (GPS) Rwy 26

NA when local weather not available.

¹Categories A, B, 1000-2; Categories C, D, 1000-3.

NAME ALTERNATE MINIMUMS

PORTLAND, OR

PORTLAND INTL ILS or LOC Rwy 10L¹
ILS or LOC Rwy 10R²
ILS or LOC Rwy 28L³
ILS or LOC Rwy 28R⁴
LOC/DME Rwy 21⁵
RNAV (GPS) Rwy 10L⁵
RNAV (GPS) Rwy 10R⁶
RNAV (GPS) Rwy 12⁷
RNAV (GPS) Rwy 28L⁸
RNAV (GPS) Rwy 28R⁸
VOR/DME Rwy 21⁵
VOR-A⁹
VOR Rwy 28R⁵

¹ILS, Category A, 700-2; Categories B,C, 800-2; Category D, 1000-3. LOC, Category D, 1000-3.

²Categories A,B, 900-2; Category C, 900-2½; Category D, 1000-3; Category E, 1100-3.

³ILS, Category A, 700-2; Categories B,C, 800-2; Category D, 1000-3; Category E, 1100-3. LOC, Category D, 1000-3; Category E, 1100-3.

⁴ILS, Category A, 700-2; Categories B,C, 800-2; Category D, 1000-3. LOC, Category D, 1000-3.

⁵Category D, 1000-3.

⁶Categories A,B,C 800-5; Category D, 1000-5.

⁷NA when local weather not available.

⁸Category D, 1000-3.

⁹Categories A,B, 900-2; Category C, 900-2½; Category D, 1000-3.

PORTLAND-HILLSBORO .. ILS or LOC Rwy 12¹
RNAV (GPS) Rwy 12²

¹Categories A,B, 1000-2; Category C, 1000-2½; Category D, 1000-3.

²NA when local weather not available.

PORTLAND-TROUTDALE NDB or GPS-A
Categories A,B, 1100-2; Category C, 1100-3;
Category D, 1300-3.

PULLMAN/MOSCOW, WA

PULLMAN/MOSCOW
MUNI RNAV (GPS) Rwy 5,800-2½

RAWLINS, WY

RAWLINS MUNI/
HARVEY FIELD RNAV (GPS) Rwy 22¹
VOR/DME Rwy 22²

¹Categories A, B, 900-2; Category C, 900-2½; Category D, 900-2½.

²Categories A, B, 1000-2; Category C, 1000-2½; Category D, 1000-3.

NAME ALTERNATE MINIMUMS

REDMOND, OR

ROBERTS FIELD **ILS or LOC Rwy 22¹**
VOR/DME Rwy 22²

¹ILS, LOC, Category D, 800-2½; Category E, 800-2½.

²Category A, B, 1000-2; Category C, 1000-2¾; Category D, E, 1000-3.

RENTON, WA

RENTON MUNI **NDB Rwy 16¹**
RNAV (GPS) Y Rwy 16²
RNAV (GPS) Z Rwy 16³

NA when local weather not available.

¹Categories A, B, 1000-2; Categories C, D, 1000-3.

²Categories A, B, 900-2; Category C, 900-2¾; Category D, 900-3.

³Categories A, B, 900-2.

REXBURG, ID

REXBURG-MADISON COUNTY **RNAV (GPS) Rwy 35**

NA when local weather not available.

Category D, 800-2½.

RICHLAND, WA

RICHLAND **NDB Rwy 19¹**
RNAV (GPS) Rwy 19¹
RNAV (GPS) Rwy 26¹
VOR/DME-A²
VOR Rwy 26¹

¹Category D, 800-2½.

²Categories A, B, 900-2; Category C, 900-2¾; Category D, 900-3.

RIVERTON, WY

RIVERTON RGNL **ILS or LOC Rwy 28**
RNAV (GPS) Rwy 10
RNAV (GPS) Rwy 28
VOR Rwy 10
VOR Rwy 28

NA when local weather not available.

ROCK SPRINGS, WY

ROCK SPRINGS-SWEETWATER COUNTY **VOR-B**

Category D, 800-2¼.

ROSEBURG, OR

ROSEBURG RGNL **RNAV (GPS)-B**

NA when local weather not available.

Categories A, B, 1200-2; Category C, 1200-3; Category D, 1400-3.

NAME ALTERNATE MINIMUMS

SALEM, OR

MCNARY FIELD **ILS or LOC Rwy 31¹²**
LOC/DME Rwy 31³
RNAV (GPS) Rwy 31¹³

¹NA when local weather not available.

²ILS, Categories A, B, 800-2; Category C, 800-2¼; Category D, 800-2½. LOC, Category C, 800-2¼; Category D, 800-2½.

³Category D, 800-2½.

SCAPPOOSE, OR

SCAPPOOSE INDUSTRIAL AIRPARK **VOR/DME or GPS-A**
Category B, 900-2; Category C, 1000-2¾; Category D 1300-3.

SEATTLE, WA

BOEING FIELD-KING COUNTY INTL **ILS Rwy 13R¹**
ILS Rwy 31L²
LOC/DME Rwy 13R³
RNAV (GPS) Y Rwy 13R⁴
RNAV (RNP) Z Rwy 13R⁵

¹ILS, Category A, 800-2; Category B, 900-2; Category C, 900-2½; Category D, 1000-3.

²Category A, 800-2; Category B, 900-2; Category C, 900-2½; Category D, 1000-3.

³Category B, 900-2; Category C, 900-2½; Category D, 1000-3.

⁴Category B, 900-2; Category C, 900-2¾; Category D, 1000-3.

⁵Categories A, B, C, D, 800-2¼.

SHERIDAN, WY

SHERIDAN COUNTY **ILS or LOC/DME Rwy 32**
RNAV (GPS) Rwy 14
RNAV (GPS) Rwy 32
VOR Rwy 14

NA when local weather not received.

Category D, 800-2¼.

SIDNEY, MT

SIDNEY-RICHLAND MUNI **NDB Rwy 1¹**
NDB Rwy 19²

¹Category D, 800-2¼.

²Categories C, D, 800-2½.

NAME ALTERNATE MINIMUMS

SPOKANE, WA

FELTS FIELD ILS/DME Rwy 21R¹
RNAV (GPS)-A²
RNAV (GPS) Rwy 3L²
VOR Rwy 3L^{3,4}

- ¹Categories A,B, 1000-2; Category C, 1000-2½.
²Categories A,B, 1000-2; Category C, 1000-2¾; Category D, 1000-3.
³Categories A, B, 1000-2; Categories C, D, 1000-3.
⁴NA when local weather not available.

SPOKANE INTL ILS or LOC Rwy 3¹
ILS or LOC/DME Rwy 21¹
VOR Rwy 3²

- ¹ILS, Category D, 700-2.
²Category E, 800-2½.

TACOMA, WA

TACOMA NARROWS ILS Rwy 17¹
NDB Rwy 35¹
RNAV (GPS) Rwy 17^{1,2}
RNAV (GPS) Rwy 35^{2,3}

- ¹NA when control tower closed.
²Category D, 800-2½.
³NA when local weather not available.

THE DALLES, OR

COLUMBIA GEORGE RGNL/
THE DALLES MUNI RNAV (GPS)-A
Categories A,B, 1100-2; Category C, 1100-3;
Category D, 1200-3.

TWIN FALLS, ID

JOSLIN FIELD-MAGIC VALLEY
RGNL ILS or LOC Rwy 25¹
NDB Rwy 25
RNAV (GPS) Rwy 7
RNAV (GPS) Rwy 25
VOR Rwy 2⁵

- NA when local weather not available.
¹ILS, Category D, 700-2; Category E, 900-3.
LOC, Category E, 900-3.
²Category C, 800-2½; Category D, 800-2½.

WALLA WALLA, WA

WALLA WALLA RGNL ILS or LOC Rwy 20¹
NDB Rwy 20, 1000-3
RNAV (GPS) Rwy 2^{2,3}
RNAV (GPS) Rwy 16²
RNAV (GPS) Rwy 20²
VOR/DME Rwy 2⁵

- ¹ILS, LOC, Categories A,B, 1100-2; Categories C, D, 1100-3.
²Category D, 800-2½.
³NA when local weather not available.

NAME ALTERNATE MINIMUMS

WENATCHEE, WA

PANGBORN
MEMORIAL ILS Y Rwy 12, 1300-4
VOR/DME-C^{1,2}
VOR/DME-A³

- ¹NA when local weather not available.
²Categories A, B, 1500-2; Categories C, D, 1500-3.
³Categories A, B, 2000-2; Categories C, D, 2000-3.

WOLF POINT, MT

L.M. CLAYTON RNAV (GPS) Rwy 11
RNAV (GPS) Rwy 29
NA when local weather not available.

WORLAND, WY

WORLAND MUNI VOR or GPS Rwy 16
Categories C,D, 800-2½.

YAKIMA, WA

YAKIMA AIR TERMINAL/
MCALLISTER FIELD ILS Y Rwy 27^{1,2}
ILS Z Rwy 27^{1,3}
LOC/DME BC-B^{1,4}
RNAV (GPS) Y Rwy 27⁵
RNAV (GPS) Z Rwy 27⁴
VOR/DME or TACAN Rwy 27⁶
VOR-A⁷

- ¹NA when control tower closed.
²ILS, Categories A, B, 600-2½; Category C, 700-2½; Category D, 800-2½.
³Category C, 700-2; Category D, 800-2½
⁴Category D, 800-2½.
⁵Category C, 800-2½; Category D, 800-2½.
⁶Categories A, B, 1100-2; Categories C, D, 1100-3.
⁷Category C, 800-2½; Category D, 800-2½.

RADAR INSTRUMENT APPROACH MINIMUMS

CHEYENNE, WY

Amdt 1B, MAY 8, 2008 (FAA)

ELEV 6159

CHEYENNE RGNL/JERRY OLSON FIELD

RADAR - 124.55 263.075 NA

	<u>RWY</u>	<u>GS/TCH/RP</u>	<u>CAT</u>	<u>DA/</u> <u>MDA-VIS</u>	<u>HAT/</u> <u>HATH/</u> <u>HAA CEIL-VIS</u>	<u>DA/</u> <u>MDA-VIS</u>	<u>HAT/</u> <u>HATH/</u> <u>HAA CEIL-VIS</u>
PAR 27	3.0°/55/918	ABCDE	6321/24	200 (200-½)			
ASR 9		ABC	6500-1	357 (400-1)	DE 6500-1¼	357 (400-1¼)	
27		ABC	6520/24	399 (400-½)	DE 6520/50	399 (400-1)	
CIR ALL		AB	6660-1	501 (600-1)	C 6660-1½	501 (600-1½)	
		D	6720-2	561 (600-2)	E 6960-2¾	801 (900-2¾)	

For inoperative MALSR increase, PAR 27 category E visibility to RVR 4000, ASR 27 category D visibility to RVR 6000 and ASR 27 category E visibility to 1½. PAR not available when ASR out of service.

GRAY AAF (KGRF), FORT LEWIS, WA (Amdt 1 10098 USA)

ELEV 300

RADAR - (E) 128.2 139.925 239.0 317.4 NA

	<u>RWY</u>	<u>GS/TCH/RPI</u>	<u>CAT</u>	<u>DH/</u> <u>MDA-VIS</u>	<u>HAT/</u> <u>HATH/</u> <u>HAA</u>	<u>CEIL-VIS</u>
PAR ¹³	15	3.0°/55/853	ABCD	499/24	200	(200-½)
	33 ²	3.0°/39/730	ABCD	500-½	200	(200-½)

¹Opr Mon-Fri 1600-0759Z++, exc federal holidays. POC DSN 357-4953 or C253-967-4953. Svc incl PAR and apch mnt of ILS and NDB. ²PAR not authorized when R6703D is active. ³Circling not authorized.

OPS 138.6

Contact Seattle approach for vectors to Final on 120.1 290.9

Missed Approach:

Rwy 15: Climb to 1000, then climbing left turn to 2000 via heading 270° for RADAR vectors; or when directed by ATC, climb to 1000, then climbing left turn to 2000 direct GRF NDB and hold NW, RT, 147° inbound (ADF REQUIRED).

Rwy 33: Climb to 1000, then climbing left turn to 2000 via heading 270° for RADAR vectors; or when directed by ATC, climb to 2000 direct GRF NDB and hold NW, RT, 147° inbound (ADF REQUIRED). LOST COMMUNICATIONS (ALL RWYS): As directed by ATC on initial contact.

RADAR INSTRUMENT APPROACH MINIMUMS**OAK HARBOR (OKH), WA**

Amdt 1A, Mar 12, 2009 (FAA)

ELEV 193**A J EISENBERG****RADAR - 118.2 285.65 ▽ ▲NA**

	<u>RWY</u>	<u>GS/TCH/RPI</u>	<u>CAT</u>	<u>DA/ MDA-VIS</u>	<u>HAT/ HATH/ HAA</u>	<u>CEIL-VIS</u>
ASR	7		AB CD	620-1 NA	427	(500-1)
CIR	All Rwy		A B CD	620-1 660-1 NA	427 467	(500-1) (500-1)

When local altimeter setting not received, use Whidbey Island NAS altimeter setting and increase all MDAs 40 feet. Circling north of Rwy 7-25 NA at night. Visibility reduction by helicopters NA.

RADAR INSTRUMENT APPROACH MINIMUMS

WHIDBEY ISLAND NAS (KNUW), (AULT FLD) WA (09071 USN)

ELEV 47

RADAR - (E) 126.05x 126.85x 266.8x 299.6x 310.8x 322.5x 327.0x 343.75x ▽

	<u>RWY</u>	<u>GS/TCH/RPI</u>	<u>CAT</u>	<u>DH/ MDA-VIS</u>	<u>HAT/ HATH/ HAA</u>	<u>CEIL-VIS</u>
PAR ¹	25 ^{2 3 10}	3.0°/40/718	ABCDE	228-½	200	(200-½)
	14 ^{5 11}	3.0°/49/947	ABCDE	139-¼	100	(100-¼)
	7	3.0°/50/961	ABCDE	125-½	100	(100-½)
	32 ^{2 10}	3.0°/34/776	ABCDE	147-¼	100	(100-¼)
W/O GS	25 ^{3 6}		ABC	480-¾	452	(500-¾)
			DE	480-1	452	(500-1)
	14 ^{7 11}		AB	340-½	301	(300-½)
			CDE	340-¾	301	(300-¾)
	7		ABCDE	300-1	275	(300-1)
	32 ^{8 10}		ABC	500-¾	453	(500-¾)
		DE	500-1	453	(500-1)	
ASR	7		AB	440-1	415	(400-1)
			CD	440-1¼	415	(400-1¼)
			E	440-1½	415	(400-1½)
	14 ^{4 11}		AB	600-½	561	(600-½)
			C	600-1	561	(600-1)
			D	600-1¼	561	(600-1¼)
			E	600-1½	561	(600-1½)
	32 ^{8 11}		AB	680-½	633	(700-½)
			C	680-1¼	633	(700-1¼)
			D	680-1½	633	(700-1½)
			E	680-1¾	633	(700-1¾)
	25 ⁴		AB	760-½	732	(800-½)
		C	760-1½	732	(800-1½)	
		D	760-1¾	732	(800-1¾)	
		E	760-2	732	(800-2)	
CIR ⁹		A	780-1	733	(800-1)	
		B	800-1¼	753	(800-1¼)	
		C	800-2¼	753	(800-2¼)	
		D	860-2¾	813	(900-2¾)	
		E	1100-3	1053	(1100-3)	

¹No-NOTAM MP: PAR 1600-0800Z++ Mon. ²When ALS inop, increase vis CAT ABCDE to ¾ mile. ³Caution: Trees 265' MSL, 3270' from THLD, 1647' right of RCL. ⁴When ALS inop, increase vis CAT AB to 1 mile, CAT C to 1¼ miles, CAT D to 2 miles, CAT E to 2¼ miles. ⁵When ALS inop, increase CAT ABCDE vis to ½ mile. ⁶When ALS inop, increase vis CAT ABC to 1¼ miles, CAT DE to 1½ miles. ⁷When ALS inop, increase vis CAT ABCDE to 1 mile. ⁸When ALS inop, increase vis CAT ABC to 1¼ mile, CAT DE to 1½ mile. ⁹When CIRCLING to RWY 25 or 32, increase vis CAT A to 1¼ mile. ¹⁰Amdt 2. ¹¹Amdt 1.



INSTRUMENT APPROACH PROCEDURE CHARTS



IFR TAKE-OFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

Civil Airports and Selected Military Airports

ALL USERS: Airports that have Departure Procedures (DPs) designed specifically to assist pilots in avoiding obstacles during the climb to the minimum enroute altitude, and/or airports that have civil IFR take-off minimums other than standard, are listed below. Take-off Minimums and Departure Procedures apply to all runways unless otherwise specified. Altitudes, unless otherwise indicated, are minimum altitudes in MSL.

DPs specifically designed for obstacle avoidance are referred to as Obstacle Departure Procedures (ODPs) and are described below in text, or published separately as a graphic procedure. If the (Obstacle) DP is published as a graphic procedure, its name will be listed below, and it can be found in either this volume (civil), or a separate Departure Procedure volume (military), as appropriate. Users will recognize graphic obstacle DPs by the term "(OBSTACLE)" included in the procedure title; e.g., TETON TWO (OBSTACLE). If not assigned a SID or radar vector by ATC, an ODP may be flown without ATC clearance to ensure obstacle clearance.

Graphic DPs designed by ATC to standardize traffic flows, ensure aircraft separation and enhance capacity are referred to as "Standard Instrument Departures (SIDs)". SIDs also provide obstacle clearance and are published under the appropriate airport section. ATC clearance must be received prior to flying a SID.

CIVIL USERS NOTE: Title 14 Code of Federal Regulations Part 91 prescribes standard take-off rules and establishes take-off minimums for certain operators as follows: (1) Aircraft having two engines or less - one statute mile. (2) Aircraft having more than two engines - one-half statute mile. These standard minima apply in the absence of any different minima listed below.

MILITARY USERS NOTE: Civil (nonstandard) take-off minima are published below. For military take-off minima, refer to appropriate service directives.

NAME	TAKE-OFF MINIMUMS
AFTON, WY	
AFTON MUNI	
	DEPARTURE PROCEDURE: Rwy 16 , Use LUNDI DEPARTURE. Rwy 34 , use AFTON DEPARTURE.

ALBANY, OR	
ALBANY MUNI	
	DEPARTURE PROCEDURE: Rwy 16 , turn right. Rwy 34 , turn left. All aircraft climb direct CVO VOR/DME and continue climb in CVO VOR/DME holding pattern, (E, right turns, 261° inbound) to cross CVO VOR/DME at or above 3000.

ANACONDA, MT	
BOWMAN FIELD	
	TAKE-OFF MINIMUMS: Rwy 4 , std. w/min. climb of 417' per NM to 9000, or 2800-3 for climb in visual conditions. Rwy 17 , std. w/min. climb of 321' per NM to 10200, or 2800-3 for climb in visual conditions. Rwy 22 , NA-obstacles. Rwy 35 , std. w/min. climb of 369' per NM to 9100, or 2800-3 for climb in visual conditions.
	DEPARTURE PROCEDURE: Rwys 4, 35 , climbing right turn to 10200 via heading 130° and CPN VOR/DME R-340 to CPN VOR/DME, continue climb-in-hold to 10200 (north, left turn, 166° inbound), or for climb in visual conditions, cross Bowman Field Airport at or above 7700 then proceed via CPN R-309 to CPN VOR/DME, continue climb-in-hold to 10200 (north, left turn, 166° inbound).

NAME	TAKE-OFF MINIMUMS
BOWMAN FIELD(CONT)	
	Rwy 17 , climbing left turn to 10200 via heading 100° and CPN VOR/DME R-335 to CPN VOR/DME, continue climb-in-hold to 10200 (north, left turn, 166° inbound), or for climb in visual conditions, cross Bowman Field Airport at or above 7700 then proceed via CPN R-309 to CPN VOR/DME, continue climb-in-hold to 10200 (north, left turn, 166° inbound).
	NOTE: Rwy 17 , multiple trees beginning 865' from departure end of runway, 243' left of centerline, up to 70' AGL/5097' MSL. Rod on hangar 570' from departure end of runway, 278' left of centerline, 54' AGL/5054' MSL. Multiple trees beginning 787' from departure end of runway, 165' right of centerline, up to 70' AGL/5098' MSL. Multiple transmission lines beginning 4602' from departure end of runway, 1664' right of centerline, 80' AGL/5159' MSL. Rwy 35 , multiple transmission lines beginning 2242' from departure end of runway, 964' left of centerline, up to 80' AGL/5159' MSL.

ARCO, ID	
ARCO-BUTTE COUNTY (AOC)	
AMDT 1 08157 (FAA)	
	TAKE-OFF MINIMUMS: Rwy 6 , NA - Obstacles. DEPARTURE PROCEDURE: Use JATTS DEPARTURE.



ARLINGTON, WA**ARLINGTON MUNI**

TAKE-OFF MINIMUMS: **Rwy 11**, 600-2 or std. with a min. climb of 350' per NM to 700. **Rwy 34**, 500-2 or std. with a min. climb of 260' per NM to 700.

DEPARTURE PROCEDURE: **Rwy 11**, turn right. **Rwy 16**, climb direct to WATON LOM. **Rwys 29,34**, turn left. All aircraft climb direct to WATON LOM. Aircraft departing WATON LOM on bearings 150° CW 200° and bearings 260° CW 340° from WATON LOM continue climb on course. Aircraft departing WATON LOM on bearings 340° CW 150° from WATON LOM climb in holding pattern (S, left turns, 339° inbound) to 4500 then continue climb on course. Aircraft departing WATON LOM on bearings 200° CW 260° from WATON LOM climb in holding pattern (S, left turns, 339° inbound) to 1500 then continue climb on course.

ASTORIA, OR**ASTORIA RGNL**

TAKE-OFF MINIMUMS: **Rwy 8**, 800-3 or std. with a min. climb of 320' per NM to 900. **Rwy 13**, 700-2 or std. with a min. climb of 350' per NM to 800.

DEPARTURE PROCEDURE: **Rwys 8,31**, turn left. **Rwy 13**, climb runway heading to 800 then climbing right turn. **Rwy 26**, turn right. Aircraft departing northwestbound climb via AST R-290 on course. All other aircraft climb to 1500 or above via AST R-290 then left turn to AST VOR/DME and continue climbing on course.

AUBURN, WA**AUBURN MUNI**

DEPARTURE PROCEDURE: Use AUBURN DEPARTURE.

AURORA, OR**AURORA STATE**

DEPARTURE PROCEDURE: **Rwy 17**, turn right, thence... **Rwy 35**, turn left, thence...
...Aircraft proceeding via V23 climb on course; All others climb in UBG VOR/DME holding pattern (hold south, left turn, 003° inbound) to cross UBG VOR/DME at or above MEA/MCA for direction of flight.
NOTE: **Rwy 17**, multiple trees 31' from departure end of runway, 273' right of centerline, up to 90' AGL/270' MSL. Multiple trees beginning 979' from departure end of runway, 247' right of centerline up to 113' AGL/316' MSL. Road 254' from departure end of runway, 350' left of centerline, 16' AGL/209' MSL. **Rwy 35**, multiple trees and road beginning 31' from departure end of runway, 163' left of centerline, up to 138' AGL/329' MSL. Multiple trees beginning 973' from departure end of runway, 281' right of centerline, up to 58' AGL/253' MSL.

BAKER, MT**BAKER MUNI**

NOTE: **Rwy 13**, 51' derrick 2200' from departure end of runway on centerline. 100' trees south of airport, near runway, various locations. **Rwy 31**, 146' antenna on tower 4000' from departure end of runway, 1800' left of centerline. 114' rod on OL antenna 3800' from departure end of runway on centerline.

BAKER CITY, OR**BAKER CITY MUNI**

TAKE-OFF MINIMUMS: **Rwy 8**, 900-2 or std. with a min. climb of 315' per NM to 6000, (788' per min. at 150K, 1050' per min. at 200K, 1313' per min. at 250K). **Rwy 13**, 1400-2 or std. with a min. climb of 310' per NM to 6000 (775' per min. at 150K, 1033' per min. at 200K, 1292' per min. at 250K). **Rwy 17**, NA. **Rwy 31**, 1300-2 or std. with a min. climb of 240' per NM to 6000 (600' per min. at 150K, 800' per min. at 200K, 1000' per min. at 250K). **Rwy 35**, CAT C, D 1000-2; or std. with a min. climb of 240' per NM to 6000 (600' per min. at 150K, 800' per min. at 200K, 1000' per min. at 250K).
DEPARTURE PROCEDURE: **Rwys 8,13**, turn left. **Rwys 26,31,35**, turn right. All aircraft climb direct BKE VOR/DME. Continue climb in BKE holding pattern (SE, right turns, 298° inbound) to cross BKE VOR/DME at or above MCA or MEA for route of flight.

BELLINGHAM, WA**BELLINGHAM INTL**

DEPARTURE PROCEDURE: **Rwy 16**, climb heading 160° to 600, then climbing right turn direct HUH VORTAC. Do not exceed 210 KIAS until established northbound. **Rwy 34**, climb heading 340° to 600, then climbing left turn to intercept HUH R-145 to HUH VORTAC, continue climb in holding pattern (northwest, right turn, 149° inbound) to MEA as appropriate for direction of flight.

NOTE: **Rwy 16**, lighted windsock 9' from departure end of runway, 259' right of centerline, 16' AGL/181' MSL. Multiple trees beginning 747' from departure end of runway, 405' right of centerline, up to 68' AGL/213' MSL. Multiple trees beginning 1128' from departure end of runway, 57' left of centerline, up to 104' AGL/249' MSL. **Rwy 34**, lighted windsock 93' from departure end of runway, 516' right of centerline, 27' AGL/169' MSL. Multiple trees beginning 1372' from departure end of runway, 619' right of centerline, up to 134' AGL/246' MSL.

BEND, OR**BEND MUNI (BDN)
AMDT 4 09183 (FAA)**

DEPARTURE PROCEDURE: Use BEND DEPARTURE.

BIG PINEY, WY**MILEY MEMORIAL FIELD**

TAKE-OFF MINIMUMS: **Rwys 8,26**, NA.
DEPARTURE PROCEDURE: **Rwy 13**, climb to 8400 via BPI R-124. **Rwy 31**, climb to 10800 via BPI R-320 thence all aircraft climb on course.

BILLINGS, MT

BILLINGS LOGAN INTL (BIL)
AMDT 5 08101 (FAA)

TAKE-OFF MINIMUMS: **Rwy 10R**, NA- Obstacles.
DEPARTURE PROCEDURE: **Rwy 10L**, Climb heading
098° to 4600 before turning right.

NOTE: **Rwy 10L**, fence 466' from departure end of
runway, 535' right of centerline, 11' AGL/3511' MSL,
cars on road, beginning from 624' from departure end of
runway, 427' right of centerline, 15' AGL/3523' MSL,
ground beginning 21' from departure end of runway, 499'
right of centerline, 0' AGL/3505' MSL. **Rwy 25**, airport
security fence, abeam departure end of runway, 500' left
of centerline, 11' AGL/3672' MSL to 1200' from
departure end of runway, abeam rwy centerline, 11' AGL/
3672' MSL.

BLACKFOOT, ID

MCCARLEY FIELD

DEPARTURE PROCEDURE: **Rwy 1**, climb to 7000 (or
higher assigned altitude) direct IDA VOR/DME, before
proceeding on course. **Rwy 19**, climb to 7000 (or higher
assigned altitude) direct PIH VORTAC, before
proceeding on course.

BOISE, ID

BOISE AIR TERMINAL / GOWEN FIELD (BOI)
AMDT 6 10042 (FAA)

DEPARTURE PROCEDURE: Use GOWEN
DEPARTURE.

BOZEMAN, MT

GALLATIN FIELD (BZN)
AMDT 3 08213 (FAA)

TAKE-OFF MINIMUMS: **Rwys 3, 21**, NA-ATC.
DEPARTURE PROCEDURE: **Rwys 12, 30**, use
BOZEMAN DEPARTURE.

BREMERTON, WA

BREMERTON NATIONAL (PWT)
AMDT 3 08045 (FAA)

TAKE-OFF MINIMUMS: **Rwy 1**, 300-1 or std. w/ min.
climb of 410' per NM to 700.
DEPARTURE PROCEDURE: **Rwy 1**, Climbing right
turn to 6000 direct CAN NDB, Thence... **Rwy 19**, Climb
to 6000 direct CAN NDB, thence...
...Continue climb-in-hold (S, LT, 013° inbound) to 6000
before proceeding on course.
NOTES: **Rwy 1**, Multiple bushes 380' from departure end
of runway, 522' left of centerline, up to 17' AGL/456'
MSL, multiple trees and poles beginning 1210' from
departure end of runway, 622' left of centerline, up to 100'
AGL/561' MSL, multiple trees and bushes 1012' from
departure end of runway, 708' right of centerline, up to
100' AGL/495' MSL. **Rwy 19**, Multiple trees beginning
176' from departure end of runway, 337' left of centerline,
up to 100' AGL/514' MSL, multiple trees beginning 371'
from departure end of runway, 277' right of centerline, up
to 100' AGL/548' MSL.

BUFFALO, WY

JOHNSON COUNTY

TAKE-OFF MINIMUMS: Northbound aircraft:
Rwys 13, 31, 2400-2 or std. with a min. climb of 300' per
NM to 7500. Southbound aircraft: **Rwy 31**, 400-2 or std.
with a min climb of 300' per NM to 6000.
DEPARTURE PROCEDURE: Northbound aircraft:
Rwy 13, turn left. **Rwy 31**, climb straight ahead.
All aircraft proceed via SHR R-139 to SHR VORTAC.
Southbound aircraft: **Rwy 13**, climb straight ahead.
Rwy 31, turn right. **All aircraft** proceed via CZIR-319 to
CZI VOR/DME.

BURLEY, ID

BURLEY MUNI (BYI)
AMDT 5 10042 (FAA)

TAKE-OFF MINIMUMS: **Rwy 24**, 300-1½ or std. w/ min.
climb of 428' per NM to 4500.
DEPARTURE PROCEDURE: **Rwy 2**, climbing left turn
direct BYI VOR/DME, continue climb in BYI VOR/DME
holding pattern (hold Northwest right turns, 125°
inbound) to cross BYI VOR/DME at or above MEA for
route of flight. **Rwy 6**, climbing left turn direct BYI VOR/
DME, continue climb in BYI VOR/DME holding pattern
(hold Northwest right turns, 125° inbound) to cross BYI
VOR/DME at or above MEA for route of flight. **Rwy 20**,
climbing right turn direct BYI VOR/DME, continue climb
in BYI VOR/DME holding pattern (hold Northwest right
turns, 125° inbound) to cross BYI VOR/DME at or above
MEA for route of flight. **Rwy 24**, climbing right turn
direct BYI VOR/DME, continue climb in BYI VOR/DME
holding pattern (hold Northwest right turns, 125°
inbound) to cross BYI VOR/DME at or above MEA for
route of flight.

NOTE: **Rwy 2**, obstruction light on bridge 252' from DER,
513' left of centerline, 57' AGL/4195' MSL. Trees
beginning 686' from DER, 201' right of centerline, up to
35' AGL/4184' MSL. Tree 694' from DER, 375' left of
centerline, 29' AGL/4178' MSL. Obstruction light on
building 736' from DER, 188' left of centerline, 11' AGL/
4161' MSL. Tower 803' from DER, 590' left of centerline,
55' AGL/4204' MSL. Vehicles on road beginning 857'
from DER, 1' right of centerline, up to 17' AGL/4168'
MSL. Poles beginning 1226' from DER, 549' left of
centerline, up to 72' AGL/4222' MSL. Building vent 1240'
from DER, 164' left of centerline, 27' AGL/4177' MSL.
Stack 2206' from DER, 856' right of centerline, 86' AGL/
4236' MSL. Stack 2573' from DER, 614' left of
centerline, 86' AGL/4236' MSL. Elevators beginning
3980' from DER, 131' right of centerline, up to 133' AGL/
4283' MSL. **Rwy 6**, trees beginning 46' from DER, 172'
right of centerline, up to 14' AGL/4163' MSL. Rising
terrain beginning 49' from DER, 326' right of centerline,
up to 4149' MSL. Bush 150' from DER, 103' right of
centerline, 5' AGL/4147' MSL. Antenna 586' from DER,
398' left of centerline, 15' AGL/4165' MSL. Obstruction
light on bridge 1061' from DER, 80' right of centerline,
39' AGL/4179' MSL.

BURLY MUNI (BYI) (CONT)

Rwy 20, obstruction light pole 42' from DER, 124' left of centerline, 16' AGL/4170' MSL. Railroad beginning 65' from DER, 4' left of centerline, up to 23' AGL/4177' MSL. Sign 181' from DER, 121' right of centerline, 18' AGL/4172' MSL. Vehicles on road 162' from DER, 2' left of centerline, 17' AGL/4169' MSL. Vehicles on road beginning 335' from DER 348' right of centerline up to 17' AGL/4171' MSL. Pole 446' from DER, 210' right of centerline, 26' AGL/4180' MSL. Antenna 523' from DER, 337' right of centerline, 63' AGL/4217' MSL. Tree 586' from DER, 213' right of centerline, 28' AGL/4182' MSL. Trees beginning 2014' from DER, 339' left of centerline, up to 96' AGL/4251' MSL.

Rwy 24, vehicles on road beginning 25' from DER, 9' left of centerline, up to 15' AGL/4169' MSL. Fence 58' from DER, 8' left of centerline, 4' AGL/4154' MSL. Rising terrain beginning 69' from DER, 201' right of centerline, up to 4154' MSL. Railroad 152' from DER, 6' left of centerline, 23' AGL/4176' MSL. Trees beginning 427' from DER, 101' right of centerline, up to 69' AGL/4223' MSL. Vehicles on road beginning 509' from DER, 586' right of centerline, up to 15' AGL/4169' MSL. Railroad beginning 568' from DER, 288' right of centerline, up to 23' AGL/4177' MSL. Pole 735' from DER, 185' left of centerline, 18' AGL/4172' MSL. Light standard 824' from DER, 58' right of centerline, 23' AGL/4177' MSL. Antenna 1630' from DER, 112' left of centerline, 58' AGL/4212' MSL. Tower 2766' from DER, 175' left of centerline, 123' AGL/4282' MSL. Tower 3570' from DER, 158' right of centerline, 157' AGL/4312' MSL. Obstruction light on elevators beginning 3115' from DER, 164' left of centerline, up to 184' AGL/4344' MSL.

BURLINGTON/MOUNT VERNON, WA

SKAGIT RGNL (BVS)

ORIG-A 08297 (FAA)

TAKE-OFF MINIMUMS: **Rwy 4**, 3000-2 or std. with a min. climb of 340' per NM to 3600. **Rwy 10**, 1700-2 or std. with a min. climb of 245' per NM to 2300. **Rwy 22**, 1300-2 or std. with a min. climb of 210' per NM to 1800.

DEPARTURE PROCEDURE: **Rwys 4, 10, 22**, turn right heading 280°. **Rwy 28**, climb runway heading.

All aircraft climb to 2500 then turn right direct BVS NDB to cross BVS at or above 4500. Aircraft departing on BVS R-145 CW R-330 climb on course. All others continue climbing in BVS holding pattern (NW, right turns 113° inbound) to cross BVS at or above 6800 before proceeding on course.

NOTE: **Rwy 4**, tree 2581' from departure end of runway, 426' left of centerline, 100' AGL/212' MSL. Light pole 1489' from departure end of runway, 136' left of centerline 35' AGL/137' MSL. Bush 126' from departure end of runway, 430' right of centerline, 20' AGL/101' MSL. Building 2925' from departure end of runway, 130' left of centerline, 60' AGL/180' MSL.

BURNS, OR

BURNS MUNI

DEPARTURE PROCEDURE: **Rwy 3**, climbing right turn, thence... **Rwy 12**, climb to 4600 via heading 117°, thence... **Rwys 21, 30**, climbing left turn, thence...
...All aircraft departing on ILR R-072 CW R-209, climb on course. All others climb on ILR R-123 within 10 NM to cross ILR VOR/DME at or above 5000.

NOTE: **Rwy 21**, pole 820' from departure end of runway, 357' left of centerline, 20' AGL/4169' MSL.

BUTTE, MT

BERT MOONEY

TAKE-OFF MINIMUMS: **Rwy 11**, NA-obstacles. **Rwy 15**, std. w/ min. climb of 601' per NM to 7300, or 3300-3 for climb in visual conditions. **Rwy 29**, std. w/ min. climb of 832' per NM to 6700, or 3300-3 for climb in visual conditions. **Rwy 33**, std. w/ min. climb of 355' per NM to 6800, or 3300-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 15**, climbing right turn direct CPN VOR/DME, or for climb in visual conditions: Cross Bert Mooney Airport westbound at or above 8800 then proceed direct CPN VOR/DME, thence... **Rwy 29**, climb heading 293° to intercept CPN VOR/DME R-082 to CPN VOR/DME, or for climb in visual conditions: Cross Bert Mooney Airport westbound at or above 8800 then proceed direct CPN VOR/DME, thence... **Rwy 33**, climb direct CPN VOR/DME, or for climb in visual conditions: Cross Bert Mooney Airport westbound at or above 8800 then proceed direct CPN VOR/DME, thence...

...climb in CPN VOR/DME holding pattern (hold north, left turn, 166° inbound) to cross CPN VOR/DME at or above MEA before proceeding enroute.

NOTE: **Rwy 15**, multiple trees beginning 2 NM from departure end of runway, 1779' right of centerline, up to 100' AGL/6659' MSL. Tree 2.1 NM from departure end of runway, 66' left of centerline, 100' AGL/5934' MSL.

Rwy 29, multiple trees and poles beginning 364' from departure end of runway, 7' right of centerline, up to 100' AGL/5621' MSL. Multiple trees and lights beginning 322' left of centerline, up to 100' AGL/5582' MSL.

Terrain and numerous trees beginning 1.2 NM from departure end of runway, 1022' left of centerline, up to 100' AGL/6379' MSL. **Rwy 33**, flag pole 1095' from departure end of runway, 730' left of centerline, 64' AGL/5583' MSL.

CALDWELL, ID

CALDWELL INDUSTRIAL

TAKE-OFF MINIMUMS: **Rwy 12**, std. with a min. climb of 300' per NM to 5600, or 2400-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 12**, climb via heading 119° to 5600 before proceeding on course. For climb in visual conditions: Cross Caldwell Industrial Airport at or above 4800 before proceeding on course. **Rwy 30**, climb via heading 299° to 4400 before proceeding on course.

NOTE: **Rwy 12**, levee 198' from departure end of runway, 281' left of centerline, 0' AGL/2451' MSL. Multiple trees 1462' from departure end of runway, 877' right of centerline, up to 100' AGL/2505' MSL. **Rwy 30**, multiple poles 206' from departure end of runway, 389' right of centerline, up to 39' AGL/2457' MSL. Rod 353' from departure end of runway, 246' right of centerline, 21' AGL/2439' MSL.

CASPER, WY

CASPER/NATRONA COUNTY INTL (CPR)
AMDT 3A 09155 (FAA)

DEPARTURE PROCEDURE: **Rwys 3,8,12**, turn left.

All other runways, turn right. **All aircraft** climb direct DDY VORTAC before proceeding on course, or comply with published Casper SIDs.

CHEHALIS, WA

CHEHALIS-CENTRALIA

DEPARTURE PROCEDURE: **Rwy 16**, climb to 1000 via heading 160° then climbing left turn to 4000 via heading 001° and OLM R-151 to OLM VORTAC before proceeding on course. **Rwy 34**, climb to 4000 via heading 340° and OLM R-176 to OLM VORTAC before proceeding on course.

CHEYENNE, WY

CHEYENNE RGNL/JERRY OLSON FIELD

NOTE: **Rwy 13**, multiple trees beginning 74' from departure end of runway, 115' left of centerline, up to 40' AGL/6166' MSL. Multiple trees, pole, and fence beginning 34' from departure end of runway, 167' right of centerline, up to 40' AGL/6154' MSL. **Rwy 27**, multiple trees and poles beginning 525' from departure end of runway, 271' left of centerline, up to 40' AGL/6216' MSL. Multiple trees and poles beginning 1222' from departure end of runway, 275' right of centerline, up to 40' AGL/6211' MSL. **Rwy 31**, multiple trees, road, fence and sign beginning 196' from departure end of runway, 76' left of centerline, up to 40' AGL/6238' MSL. Multiple poles and sign beginning 407' from departure end of runway, 8' left of centerline, up to 69' AGL/6229' MSL.

CODY, WY

YELLOWSTONE RGNL (COD)

AMDT 4 10042 (FAA)

TAKE-OFF MINIMUMS: **Rwy 4**, std. with a min. climb of 400' per NM to 8000' or 4200-3 for climb in visual conditions. **Rwy 22**, std. with a min. climb of 385' per NM to 7400' or 4200-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 4**, climb heading 038° to 5900, then climbing left turn via COD R-171 to COD VOR/DME or for climb in visual conditions to cross Yellowstone Rgnl at or above 9400, then via COD R-189 to COD VOR/DME to cross COD VOR/DME at or above MEA for route of flight. **Rwy 22**, climb heading 218° to 6600, then climbing left turn via COD R-180 to COD VOR/DME or for climb in visual conditions to cross Yellowstone Rgnl at or above 9400, then via COD R-189 to COD VOR/DME to cross COD VOR/DME at or above MEA for route of flight.

NOTE: **Rwy 4**, trees beginning 100' from DER, 262' right of centerline, up to 79' AGL/5199' MSL. Rising terrain beginning 1723' from DER, 304' right of centerline, up to 5146' MSL. **Rwy 22**, poles beginning 1 NM from DER, 406' right of centerline, up to 60' AGL/5332' MSL. Rising terrain beginning 1 NM from DER, 109' right of centerline, up to 6235' MSL. Rising terrain beginning 5074' from DER, 131' left of centerline, up to 5428' MSL.

COEUR D'ALENE, ID

COEUR D'ALENE-PAPPY BOYINGTON FIELD
(COE)

AMDT 9 10042 (FAA)

DEPARTURE PROCEDURE: use COEUR D'ALENE DEPARTURE.

COLSTRIP, MT

COLSTRIP (M46)

AMDT 2 08157 (FAA)

TAKE-OFF MINIMUMS: **Rwy 6** use CISPU (RNAV)
DEPARTURE. **Rwy 24**, use CONUK (RNAV)
DEPARTURE.

CONRAD, MT

CONRAD

DEPARTURE PROCEDURE: **Rwy 24**, climb runway heading to 4300, then continue climb on course.

CORVALLIS, OR

CORVALLIS MUNI

TAKE-OFF MINIMUMS: **Rwys 9, 17, 35**, std. with a min. climb of 290' per NM to 3100 or 1700-3 for climb in visual conditions. **Rwy 27**, std. with a min. climb of 310' per NM to 3100 or 1700-3 for climb in visual conditions. DEPARTURE PROCEDURE: **Rwys 9, 17**, climbing left turn direct CVO VOR/DME, thence...or, climb in visual conditions to cross CVO VOR/DME at or above 3400.

Rwys 27, 35, climbing right turn direct CVO VOR/DME, thence...or, climb in visual conditions to cross CVO VOR/DME at or above 3400.

...climb in CVO VOR/DME holding pattern (E, RT, 261° inbound) to depart at or above 3400.

NOTE: **Rwy 9**, multiple trees and railroad beginning 549' from departure end of runway, 254' left of centerline, up to 153' AGL/383' MSL. Multiple trees and railroad beginning 670' from departure end of runway, 5' right of centerline, up to 135' AGL/380' MSL. **Rwy 27**, obstruction light on glideslope 409' from departure end of runway, 325' left of centerline, 28' AGL/273' MSL.

Rwy 35, multiple trees beginning 470' from departure end of runway, 544' left of centerline up to 36' AGL/276' MSL.

COWLEY/LOVELL/BYRON, WY

NORTH BIG HORN COUNTY

DEPARTURE PROCEDURE: **Rwys 9, 27**, aircraft departing via HCY NDB bearings 130° CW 225° climb on course, all others climb in HCY NDB holding pattern (W, right turns, 078° inbound) to cross HCY NDB at or above 9000.

DEER PARK, WA

DEER PARK (DEW)
AMDT 1 10098 (FAA)

TAKE-OFF MINIMUMS: **Rwy 34**, 300-1½ or std. with a min. climb of 455' per NM to 2500.

DEPARTURE PROCEDURE: **Rwy 4**, climbing right turn heading 165° and GEG VORTAC R-006 to GEG VORTAC. **Rwy 16**, climb heading 164° and GEG VORTAC R-006 to GEG VORTAC. **Rwy 22**, climbing left turn heading 155° and GEG VORTAC R-006 to GEG VORTAC. **Rwy 34**, climbing right turn heading 165° and GEG VORTAC R-006 to GEG VORTAC.

NOTE: **Rwy 4**, aircraft 261' from DER, 511' left of centerline, up to 21' AGL/2210' MSL. Trees beginning 1809' from DER, 413' left of centerline, up to 109' AGL/2299' MSL. Aircraft 104' from DER, 186' right of centerline, up to 21' AGL/2200' MSL. Trees beginning 1667' from DER, 373' right of centerline, up to 116' AGL/2319' MSL. **Rwy 16**, trees beginning 31' from DER, 455' left of centerline, up to 109' AGL/2279' MSL. Trees beginning 2587' from DER, 621' right of centerline, up to 104' AGL/2264' MSL. **Rwy 22**, trees beginning 1461' from DER, 211' right of centerline, up to 90' AGL/2270' MSL. **Rwy 34**, aircraft 23' from DER, 218' left of centerline, up to 21' AGL/2230' MSL. Trees beginning 2678' from DER, 18' left of centerline, up to 165' AGL/2375' MSL. Vehicles beginning 74' from DER, 339' right of centerline, up to 15' AGL/2234' MSL. Trees beginning 2219' from DER, 260' right of centerline, up to 100' AGL/2382' MSL.

DILLON, MT

DILLON

TAKE-OFF MINIMUMS: **Rwys 3,21**, NA.

DEPARTURE PROCEDURE: **Rwys 16,34**, turn right, climb in DLN VOR/DME holding pattern (N, right turns, 185° inbound) to cross DLN VOR/DME at or above; northwestbound V257 8500; southwestbound V121 8500; northbound V21 7600; southeastbound V21,V257 9400.

DOUGLAS, WY

CONVERSE COUNTY

TAKE-OFF MINIMUMS: **Rwy 5**, 300-2 or std. with a min. climb of 250' per NM to 5200. **Rwy 23**, 1700-3 or std. with a min. climb of 260' per NM to 7200.

DEPARTURE PROCEDURE: **Rwy 5**, climbing right turn via IIP VOR/DME R-342 to IIP VOR/DME. **Rwy 11**, climbing right turn via IIP VOR/DME R-312 to IIP VOR/DME. **Rwy 23**, climbing left turn via IIP VOR/DME R-264 to IIP VOR/DME. **Rwy 29**, climbing right turn via IIP VOR/DME R-325 to IIP VOR/DME. **All aircraft** departing IIP R-253 CW R-180 climb on course. All others continue climb in IIP VOR/DME holding pattern (NW, left turns, 125° inbound) to cross IIP VOR/DME at or above: R-181 CW R-199 9600; R-200 CW R-252 8000.

NOTE: **Rwy 5**, trees 1883' from departure end of runway, 549' right of centerline, 35' AGL/5014' MSL. Trees 3407' from departure end of runway, 209' right of centerline, 35' AGL/5074' MSL. Trees 5458' from departure end of runway, 1954' right of centerline, 35' AGL/5132' MSL. **Rwy 23**, trees 2068' from departure end of runway, 1008' left of centerline, 35' AGL/4994' MSL. Trees 3130' from departure end of runway, 1215' left of centerline, 35' AGL/5014' MSL.

DRIGGS, ID

DRIGGS-REED MEMORIAL (DIJ)
AMDT 2 08157 (FAA)

DEPARTURE PROCEDURE: Use LAMON DEPARTURE.

EASTSOUND, WA

ORCAS ISLAND (ORS)
AMDT 1 09351 (FAA)

TAKE-OFF MINIMUMS: **Rwy 16**, NA-Terrain. **Rwy 34**, 500-3 or std. w/ min. climb of 224' per NM to 600.

DEPARTURE PROCEDURE: **Rwy 34**, climbing right turn to 2000 to intercept HUH VORTAC R-210 to HUH VORTAC, then climb-in-hold (hold South, Left turns, 352° inbound) to cross HUH VORTAC at or above 3800 before proceeding on course.

NOTE: **Rwy 34**, trees beginning 330' from DER, 411' left of centerline, up to 120' AGL/139' MSL.

ELLENBURG, WA

BOWERS FIELD

TAKE-OFF MINIMUMS: **Rwys 7,11**, 4600-3 or std. with a min. climb of 290' per NM to 7800. **Rwy 25**, 4700-3 or std. with a min. climb of 340' per NM to 7800. **Rwy 29**, 4600-3 or std. with a min. climb of 320' per NM to 7800.

DEPARTURE PROCEDURE: **Rwys 7, 29**, climbing right turn direct ELN VORTAC. **Rwys 11, 25**, climbing left turn direct ELN VORTAC. **All aircraft**, continue climbing in the ELN VORTAC holding pattern (W, right turns, 087° inbound) to MEA/MOCA for route of flight.

EPHRATA, WA

EPHRATA MUNI (EPH)

AMDT 3 09127 (FAA)

TAKE-OFF MINIMUMS: **Rwy 29**, NA-Obstacles.

DEPARTURE PROCEDURE: **Rwy 3**, climb heading 027° to 2300 before proceeding on course. **Rwy 11**, climb heading 112° to 2200 before proceeding on course. **Rwy 21**, climb heading 207° to 2800 before proceeding on course.

EUGENE, OR

MAHLON SWEET FIELD

DEPARTURE PROCEDURE: **Rwys 16L, 16R**, climb to 1000 then climbing right turn...**Rwys 34L, 34R**, climb to 1000 then climbing left turn...

...all aircraft climb direct EUG VORTAC, then climb in EUG VORTAC holding pattern (hold north, right turn, 175° inbound) to cross EUG VORTAC at or above MEA altitude before proceeding enroute.

NOTE: **Rwy 16R**, tree 1992' from departure end of runway, 832' left of centerline, 50' AGL/419' MSL. **Rwy 16L**, multiple trees and power poles beginning 872' from departure end of runway, 35' right of centerline, up to 50' AGL/437' MSL, multiple trees and power poles beginning 890' from departure end of runway, 77' left of centerline, up to 50' AGL/433' MSL. **Rwy 34R**, multiple trees beginning 2869' from departure end of runway, 186' right of centerline, up to 50' AGL/447' MSL. Tree 2535' from departure end of runway, 652' left of centerline, 50' AGL/428' MSL.

EVANSTON, WY

EVANSTON-UINTA COUNTY BURNS FIELD
DEPARTURE PROCEDURE: **Rwy 5**, climb via heading 050° and FBR VOR/DME R-243 to FBR VOR/DME.
Rwy 23, climbing left turn via heading 030° and FBR VOR/DME R-243 to FBR VOR/DME.
All aircraft: cross FBR VOR/DME at or above MEA for direction of flight.

EVERETT, WA

SNOHOMISH COUNTY (PAINE FIELD)
TAKE-OFF MINIMUMS: **Rwy 29**, std. with a min. climb of 353' per NM to 800.
DEPARTURE PROCEDURE: **Rwys 11, 16L/R**, climbing right turn, thence...**Rwys 29, 34L/R**, climbing left turn, thence...
...for aircraft departing via V287 west bound, climb via PAE VOR/DME R-236 to 3000. All others, climb direct PAE VOR/DME, climb in PAE VOR/DME holding pattern (NW, RT, 149° inbound) to MEA for route of flight before proceeding on course.
NOTE: **Rwy 11**, multiple antennas on building, rod on obstruction light, and trees beginning 326' from departure end of runway, 387' right of centerline, up to 85' AGL/664' MSL. Tree 1156' from departure end of runway, 600' left of centerline, 93' AGL/672' MSL. **Rwy 16L**, multiple trees and pole beginning 588' from departure end of runway, 220' left of centerline, up to 118' AGL/697' MSL. Multiple trees, pole, and building beginning 449' from departure end of runway, 162' right of centerline, up to 78' AGL/657' MSL. **Rwy 16R**, multiple trees beginning 1228' from departure end of runway, 168' left of centerline, up to 140' AGL/699' MSL. Multiple trees beginning 707' from departure end of runway, 158' right of centerline, up to 118' AGL/687' MSL. **Rwy 29**, multiple trees beginning 45' from departure end of runway, 66' left of centerline, up to 111' AGL/630' MSL. Multiple trees beginning 343' from departure end of runway, 44' right of centerline, up to 110' AGL/689' MSL. **Rwy 34R**, multiple trees and pole beginning 3340' from departure end of runway, 180' right of centerline, up to 95' AGL/674' MSL. Tree 5762' from departure end of runway, 221' left of centerline, 103' AGL/682' MSL.

FAIRCHILD AFB (KSKA)

SPOKANE, WA ORIG, 08017
DEPARTURE PROCEDURES: **Rwy 5**, climb on track 048° to intercept SKA R-045 to 5300, then on course. **Rwy 23**, climb on track 241° to 3400, then on course.
TAKE-OFF OBSTACLES: **Rwy 23**, Terrain 2468' MSL, 194' from DER, 405' right of centerline. Terrain 2477' MSL, 461' from DER, 751' right of centerline. Terrain 2477' MSL, 509' from DER, 750' right of centerline.

FORT BENTON, MT

FORT BENTON
TAKE-OFF MINIMUMS: **Rwys 5, 23**, std. w/ min. climb of 274' per NM to 8900 or 5100-3 for climb in visual conditions.
DEPARTURE PROCEDURE: **Rwys 5, 23**, for climb in visual conditions: Cross Fort Benton Airport at or above 8900 MSL before proceeding on course.

FORT BRIDGER, WY

FORT BRIDGER
DEPARTURE PROCEDURE: **All aircraft** climb direct FBR VOR/DME. Aircraft departing; FBR R-210 CW R-135 climb on course; FBR R-136 CW R-209 cross FBR VOR/DME at or above 9000. (Hold NE, right turns, 215° inbound).

FRIDAY HARBOR, WA

FRIDAY HARBOR
TAKE-OFF MINIMUMS: **Rwy 34**, 500-1.
DEPARTURE PROCEDURE: Aircraft departing FHR NDB **Rwy 34**, climbing right turn direct FHR NDB, then climb on course. All other aircraft climb on course.

GILLETTE, WY

GILLETTE-CAMPBELL COUNTY (GCC)
AMDT 4 09071 (FAA)
TAKE-OFF MINIMUMS: **Rwy 16**, std. w/ min. climb of 275' per NM to 5600, or 1200-3 for climb in visual conditions. **Rwy 21**, 600-3 or std. w/ min. climb of 425' per NM to 5200.
DEPARTURE PROCEDURE: **Rwy 16**, climb via heading 158° to 5100, before proceeding on course or, for climb in visual conditions cross Gillette-Campbell County airport at or above 5400 before proceeding on course. **Rwy 21**, climb via heading 206° to 5200, before proceeding on course.
NOTE: **Rwy 3**, windsock 1415' from DER, 100' left of centerline, 24' AGL/4366' MSL. Trees beginning 1976' from DER, 267' right of centerline, up to 30' AGL/4409' MSL. **Rwy 16**, tower and poles beginning 1.61 NM from DER, 1264' left of centerline, up to 57' AGL/4696' MSL. Post and trees beginning 1.77 NM from DER, 300' right of centerline, up to 51' AGL/4789' MSL. **Rwy 21**, fence 328' from DER, 267' left of centerline, 7' AGL/4352' MSL, trees 2077' from DER, 1011' right of centerline, 30' AGL/4449' MSL, tree 7029' from DER, 2378' right of centerline, 30' AGL/4729' MSL. **Rwy 34**, fence 1236' from DER, 723' left of centerline, 16' AGL/4380' MSL. Vehicle on road 1609' from DER, 419' left of centerline, 15' AGL/4394' MSL. Trees 3093' from DER, 936' right of centerline, 30' AGL/4449' MSL. Vehicle on road 1610' from DER. 419' left of centerline, 15' AGL/4380' MSL.

GOODING, ID

GOODING MUNI (GNG)
ORIG 08269 (FAA)
DEPARTURE PROCEDURE: **Rwy 7**, climb heading 068° to 5000 before turning left. **Rwy 25**, climb heading 233° to 5600 before turning right.
NOTE: **Rwy 7**, rising terrain 59' from departure end of runway, 479' right of centerline, up to 3754' MSL. Fence line 653' from departure end of runway, 332' right of centerline, 12' AGL up to 3751' MSL. Bushes starting 877' from departure end of runway, 420' right of centerline, 20' AGL up to 3795' MSL. **Rwy 25**, vehicle on road, 91' from departure end of runway, 257' left of centerline, up to 10' AGL/3678' MSL.

GRANGEVILLE, ID

IDAHO COUNTY (S80)

AMDT 1 08157 (FAA)

TAKE-OFF MINIMUMS: **Rwy 7**, NA - Obstacles.DEPARTURE PROCEDURE: **Rwy 25**, Use MELLR

DEPARTURE.

GRANTS PASS, OR

GRANTS PASS

TAKE-OFF MINIMUMS: **Rwy 12**, NA. **Rwy 30**, 4000-3 or std. with a min. climb of 360' per NM to 5000.DEPARTURE PROCEDURE: **Rwy 30**, climb via heading 320 until passing 5000, then climbing right turn direct RBG VOR/DME. Cross RBG VOR/DME at or above MEA for route of flight.**GRAY AAF (KGRF)**

FORT LEWIS, WA AMDT 2, 10098

Rwy 15, Standard**Rwy 33**, 300-1*

* Or standard with minimum climb of 430/NM to 600.

DEPARTURE PROCEDURE: **Rwy 15**, Climb heading 147° to 700 then climbing left turn direct GRF NDB.**Rwy 33**, Climb direct GRF NDB. Aircraft departing 330° CW 070° and 135° CW 260° bearing from GRF NDB climb on course. All others continue climb in GRF NDB holding pattern (hold NW, RT, 147° inbound) to cross GRF NDB at or above: 071° CW 134° bearing from GRF NDB, 8500; 261° CW 329° bearing from GRF NDB, 1500.TAKE-OFF OBSTACLES: **Rwy 15**, Tree 100' AGL/ 439' MSL, 1848' from DER, 430' right of centerline. **Rwy 33**, Tree 100' AGL/479' MSL, 3465' from DER, 1338' left of centerline.**GREAT FALLS, MT**

GREAT FALLS INTL

NOTE: **Rwy 7**, obstruction light on lighted wind sock 237' from departure end of runway, 519' left of centerline, 34' AGL/3694' MSL. Obstruction light on building 2226' from departure end of runway, 614' left of centerline, 78' AGL/3738' MSL. Building on 681' from departure end of runway, 583' right of centerline, 48' AGL/3688' MSL. Multiple light poles beginning 1359' from departure end of runway, 440' right of centerline, up to 90' AGL/3746' MSL. **Rwy 21**, pole 1544' from departure end of runway, 791' left of centerline, 45' AGL/3725' MSL. **Rwy 25**, windmill 2.3 NM from departure end of runway, 4197' right of centerline, 338' AGL/4003' MSL.**GREYBULL, WY**

SOUTH BIG HORN COUNTY (GEY)

ORIG-A 09239 (FA)

TAKE-OFF MINIMUMS: **Rwy 25**, 300-1 or std. w/ min. climb of 260' per NM to 4200.DEPARTURE PROCEDURE: **All runways**, for departures on Gey bearings 320° CW 150°, climb in Gey NDB holding pattern to 9000 before departing on course, then continue climb to MEA or assigned altitude. Departures Gey bearings 150° CW 320° climb on course.NOTE: **Rwy 25**, bush 4955' from DER, 1268' right of centerline, 2' AGL/4101' MSL.**GUERNSEY, WY**

CAMP GUERNSEY

TAKE-OFF MINIMUMS: **Rwy 14**, 300-1 or std. with a min. climb of 320' per NM to 4700. **Rwy 32**, 1400-2 or std. with a min. climb of 320' per NM to 5800.DEPARTURE PROCEDURE: **Rwy 14**, climb to 5600 via heading 150°. **Rwy 32**, climb to 5800 via heading 070°. **All aircraft** continue on course.**HAILEY, ID**

FRIEDMAN MEMORIAL

TAKE-OFF MINIMUMS: **Rwy 13**, 2700-3 w/ min. climb of 307' per NM to 6400, or 3600-3 for climb in visual conditions. **Rwy 31**, NA-obstacles.DEPARTURE PROCEDURE: **Rwy 13**, Climbing right turn heading 149°, then on 160° course to HLE NDB, or for climb in visual conditions: cross Friedman Memorial Airport at or above 8800 heading 151°, then on 151° course to HLE NDB.NOTE: **Rwy 13**, multiple trees beginning 763' from departure end of runway, 3' right of centerline, up to 100' AGL/5345' MSL. Multiple trees beginning 1.3 NM from departure end of runway, 2587' right of centerline, up to 100' AGL/6099' MSL.**HAMILTON, MT**

RAVALLI COUNTY

DEPARTURE PROCEDURE: Use HAMEY RNAV DEPARTURE.

HAVRE, MT

HAVRE CITY-COUNTY (HVR)

AMDT 3 09351 (FAA)

TAKE-OFF MINIMUMS: **Rwy 8**, 300-1½ or std. w/ min. climb of 217' per NM to 3300.DEPARTURE PROCEDURE: **Rwy 3**, climb heading 032° to 3300 then climbing left turn to 8000 direct HVR VOR/DME thence...**Rwy 8**, climb heading 077° to 3300 then climbing left turn to 8000 via HVR R-025 to HVR VOR/DME thence...**Rwy 21**, climb heading 212° to 3300 then climbing right turn to 8000 direct HVR VOR/DME thence...**Rwy 26**, climb heading 257° to 3300 then climbing right turn to 8000 direct HVR VOR/DME thence...

...continue climb in hold in HVR VOR/DME holding pattern (hold west, right turns, 094° inbound) to cross HVR VOR/DME at or above 8000 before proceeding on course.

NOTE: **Rwy 3**, pole 2682' from DER, 1044' left of centerline, 21' AGL/2680' MSL. **Rwy 8**, obstruction light on windsock 59' from DER, 224' left of centerline, 9' AGL/2588' MSL. Tree 1192' from DER, 752' left of centerline, 25' AGL/2610' MSL. Tank 1.3 NM from DER, 2287' left of centerline, 57' AGL/2797' MSL. **Rwy 26**, light on windsock, 50' from DER, 225' right of centerline, 9' AGL/2589' MSL. Trees beginning 1617' from DER, 650' right of centerline, 25' AGL/2659' MSL.

HELENA, MT

HELENA RGNL (HLN)
ADMT 9 08269 (FAA)

TAKE-OFF MINIMUMS: **Rwy 5**, 2500-3 or std. w/ min. climb of 250' per NM to 8100, or 1600-3 for climb in visual conditions. **Rwy 9**, std. w/ min. climb of 240' per NM to 8100, or 1600-3 for climb in visual conditions. **Rwy 23**, 1600-3 or std. w/ min. climb of 560' per NM to 8100, or 1600-3 for climb in visual conditions. **Rwy 27**, 1600-3 or std. w/ min. climb of 390' per NM to 8100, or 1600-3 for climb in visual conditions. **Rwys 16, 34, NA**.
DEPARTURE PROCEDURE: **Rwys 5, 9**, climbing left turn heading 270°. **Rwys 23, 27**, climbing right turn heading 020°. **All Aircraft**: continue climb northwestbound via HLN R-318 to 8100, then climbing right turn direct HLN VORTAC, cross HLN VORTAC at or above 9000, before proceeding on course, or for climb in visual conditions: cross Helena Rgnl airport northbound at or above 5300 and continue climbing via HLN R-336 to WOKEN INT before proceeding on course.

NOTE: **Rwy 5**, ground beginning 5' from departure end of runway, 495' right of centerline, up to 3826' MSL. Fence beginning 423' from departure end of runway, 331' right of centerline, up to 10' AGL/3832' MSL. **Rwy 23**, pole 2198' from departure end of runway, 462' left of centerline, 76' AGL/3996' MSL, tree 1011' from departure end of runway, 379' left of centerline, 44' AGL/3964' MSL, rod on building 953' from departure end of runway, 321' left of centerline, 323' AGL/943' MSL, tree 1519' from departure end of runway, 142' right of centerline, 53' AGL/3953' MSL. **Rwy 27**, building 1593' from departure end of runway, 731' left of centerline, 58' AGL/6385' MSL. Ground beginning 101' from departure end of runway, 346' left of centerline, up to 3871' MSL. Tree 1567' from departure end of runway, 616' left of centerline, 47' AGL/3906' MSL.

HERMISTON, OR

HERMISTON MUNI

NOTE: **Rwy 4**, tower 379' left of departure end of runway, 50' AGL/698' MSL. **Rwy 22**, light pole 456' left of departure end of runway, 44' AGL/684' MSL.

HOQUIAM, WA

BOWERMAN

TAKE-OFF MINIMUMS: **Rwy 6**, 600-2 or std. with a min. climb of 260' per NM to 600.
DEPARTURE PROCEDURE: **Rwy 6**, climbing right turn heading 110°. **Rwy 24**, climb runway heading.
All aircraft climb to 600 continue climb on course.

HULETT, WY

HULETT MUNI (W43)
ORIG 07354 (FAA)

TAKE-OFF MINIMUMS: **Rwy 13**, std. w/ min. climb of 450' per NM to 6300, or 500-2¼ w/ min. climb of 295' per NM to 7700, or 2200-3 for climb in visual conditions.
DEPARTURE PROCEDURE: **Rwy 13**, climb to 7700 via heading 132° before proceeding on course, or climb in visual conditions: cross Hulett Muni Airport at or above 6300 before proceeding on course. **Rwy 31**, climbing right turn on a heading between 090° clockwise to 115° from departure end of runway to 7700 before proceeding on course.

NOTE: **Rwy 13**, road 398' from departure end of runway, 37' left of centerline, 15' AGL/4296' MSL, truck on road 1126' from departure end of runway, 346' left of centerline, 15' AGL/4334' MSL, trees beginning 4945' from departure end of runway, across centerline, up to 100' AGL/4657' MSL. **Rwy 31**, terrain 104' from departure end of runway, 420' left of centerline, 4200' MSL, terrain 344' from departure end of runway, 233' left of centerline, 4207' MSL.

IDAHO FALLS, ID

IDAHO FALLS RGNL (IDA)
AMDT 4 09351 (FAA)

DEPARTURE PROCEDURE: **All aircraft** departing IDA R-160 CW R-040 climb on course. **All others** climb direct IDA VOR/DME. Continue climb in IDA holding pattern (South, left turns, 019° inbound) to cross IDA VOR/DME at or above 7500 before proceeding on course.

NOTE: **Rwy 2**, pole 1039' from DER, 758' left of centerline, 42' AGL/4762' MSL. **Rwy 17**, trees, flagpole, building, light and vent on buildings, and vehicle on road beginning 29' from DER, 10' right of centerline, up to 84' AGL/4820' MSL. Trees and vent on building beginning 569' from DER, 22' left of centerline, up to 35' AGL/4760' MSL. Trees, antenna, and light poles beginning 1853' from DER, 26' right of centerline, up to 121' AGL/4851' MSL. **Rwy 35**, trees and railroad beginning 410' from DER, 503' right of centerline, up to 49' AGL/4769' MSL. Tree 1034' from DER, 715' left of centerline, 42' AGL/4762' MSL.

JACKSON, WY

JACKSON HOLE

DEPARTURE PROCEDURE: **Rwy 1**, use GEYSER DEPARTURE. **Rwy 19**, use TETON DEPARTURE.

JEROME, ID

JEROME COUNTY (JER)

AMDT 2 09295 (FAA)

TAKE-OFF MINIMUMS: **Rwy 9**, 500-1½ or std. w/ min. climb of 435' per NM to 4700.DEPARTURE PROCEDURE: **Rwy 9**, climb heading 086° to 5300 before proceeding on course. **Rwy 27**, climb heading 266° to 4800 before proceeding on course.NOTE: **Rwy 9**, bush 140' from DER, 500' left of centerline, 16' AGL/4076' MSL. Poles starting 1432' from DER, 32' left of centerline, up to 47' AGL/4169' MSL. Sign 1473' from DER, 547' left of centerline, 49' AGL/4119' MSL. Obstruction light on building 1510' from DER, 6' left of centerline, 43' AGL/4103' MSL. Trees starting 1651' from DER, 100' left of centerline, up to 53' AGL/4137' MSL. Building 2186' from DER, 173' left of centerline, 29' AGL/4119' MSL. Rising terrain starting 2549' from DER, 560' left of centerline, up to 4219' MSL. AG equip 4752' from DER, 517' left of centerline, 26' AGL/4175' MSL. Poles starting 600' from DER, 254' right of centerline, up to 48' AGL/4173' MSL. **Rwy 27**, fence starting 18' from DER, 440' left of centerline, up to 9' AGL/3969' MSL.**JOHN DAY, OR**

GRANT COUNTY RGNL/OGILVIE FIELD

(GCD)

AMDT 1 09015 (FAA)

TAKE-OFF MINIMUMS: **Rwys 9, 17, 35**, NA, Terrain. DEPARTURE PROCEDURE: **Rwy 27**, climbing left turn to 12000 heading 270° and IMB R-100 to IMB VORTAC, climb in IMB VORTAC holding pattern (E, right turns, 280° inbound) to cross IMB VORTAC at or above MEA for route of flight.NOTE: **Rwy 27**, fence beginning 195' from departure end of runway, 50' right of centerline, up to 16' AGL/3665' MSL. Trees beginning 229' from departure end of runway, 261' right of centerline, up to 26' AGL/3662' MSL. Bush 389' from departure end of runway, 438' right of centerline, 20' AGL/3659' MSL.**KALISPELL, MT**

GLACIER PARK INTL

DEPARTURE PROCEDURE: Use SKOTT

DEPARTURE.

KELSO, WA

SOUTHWEST WASHINGTON RGNL (KLS)

AMDT 3 10098 (FAA)

TAKE-OFF MINIMUMS: **Rwy 12**, NA, terrain. **Rwy 30**, std. with a min. climb of 370' per NM to 1900 or 1900-2½ for climb in visual conditions.DEPARTURE PROCEDURE: **Rwy 30**, climb heading 303° to 1900 then climbing right turn to 3900 direct LSO NDB. Continue climb in LSONDB holding pattern (North, right turns, 175° inbound) to cross LSO NDB at or above 3900, then via BTG R-310 to BTG VORTAC. For climb in visual conditions: cross Southwest Washington Rgnl at or above 1800, then via BTG R-309 to BTG VORTAC.NOTE: **Rwy 30**, light pole 22' from DER, 301' right of centerline, 30' AGL/49' MSL. Windssock 235' from DER, 348' left of centerline, 30' AGL/49' MSL. Rotating beacon 502' from DER, 425' left of centerline, 50' AGL/70' MSL. Multiple trees beginning 213' from DER, 530' right to 747' left of centerline, up to 136' AGL/155' MSL. Pole 964' from DER, 44' right of centerline, 30' AGL/50' MSL.**KEMMERER, WY**

KEMMERER MUNI (EMM)

AMDT 1 09239 (FAA)

TAKE-OFF MINIMUMS: **Rwys 4, 10, 22, 28**, NA -Rwy surfaces.DEPARTURE PROCEDURE: **Rwy 16**, climb to 12000 via heading 166° and FBR VOR/DME R-330 to FBR VOR/DME before proceeding on course. **Rwy 34**, climb via heading 346° to 8200 then climbing right turn to 12000 via heading 125° and FBR VOR/DME R-345 to FBR VOR/DME before proceeding on course.**KLAMATH FALLS, OR**

KLAMATH FALLS

TAKE-OFF MINIMUMS: **Rwy 7**, NA. **Rwy 14**, 1100-3 or std. with a min. climb of 275' per NM to 5500. **Rwy 25**, 3300-3 or std. with a min. climb of 250' per NM to 7400. **Rwy 32**, 2000-3 or std. with a min. climb of 320' per NM to 6300.DEPARTURE PROCEDURE: **Rwys 14, 25**, climb via runway heading to 6000 then climbing right turn direct LMT VORTAC, thence... **Rwy 32**, climb via runway heading to 5500 then climbing left turn direct LMT VORTAC, thence... climb in LMT holding pattern (W, right turns, 070° inbound) to cross LMT VORTAC at or above 8000.**LA GRANDE, OR**

LA GRANDE/UNION COUNTY

TAKE-OFF MINIMUMS: **Rwy 12**, Cat A/B 2900-3 or std. with a min. climb of 350' per NM to 6100. Cat C/D 4500-3 or std. with a min. climb of 500' per NM to 7800. **Rwy 30**, Cat A/B 2900-3 or std. with a min. climb of 350' per NM to 6100. Cat C/D 3600-3 or std. with a min. climb of 450' per NM to 6800. **Rwy 34**, 2900-3 or std. with a min. climb of 350' per NM to 6100. **Rwy 16**, 2000-3 or std. with a min. climb of 500' per NM to 5000.DEPARTURE PROCEDURE: **Rwy 12, 16**, climbing left turn direct LGD NDB, thence; **Rwys 30, 34**, climbing right turn heading 010°, thence; all aircraft climb to 7000 via the 339° bearing from LGD NDB, then climbing right turn direct LGD NDB.

LAKEVIEW, OR

LAKE COUNTY

TAKE-OFF MINIMUMS: **Rwy 16**, 3700-5 or std. with a min. climb of 320' per NM to 8800. **Rwy 34**, 2500-5 or std. with a min. climb of 320' per NM to 8500.
DEPARTURE PROCEDURE: **Rwy 16**, climbing right turn via LKV R-163 to LKV VORTAC. **Rwy 34**, climbing left turn heading 320° to intercept LKV R-148 then via LKV R-148 to LKV VORTAC. **All aircraft** continue climbing in the LKV VORTAC holding pattern (NW, right turns, 148° inbound) to MEA for route of flight.

LARAMIE, WY

LARAMIE RGNL

DEPARTURE PROCEDURE: **Rwy 3**, turn left. **Rwys 12, 21**, turn right. **All aircraft** climb direct LAR VORTAC, continue climb in holding pattern (W, left turns, 107° inbound) to cross LAR VORTAC at or above: westbound V4, 10600. All others cross LAR VORTAC at or above MEA for direction of flight.

LAUREL, MT

LAUREL MUNI

TAKE-OFF MINIMUMS: **Rwys 9, 14, 27, 32, NA**.
DEPARTURE PROCEDURE: **Rwy 22**, turn left. **All aircraft** climb direct BIL VORTAC.

LEWISTON, ID

LEWISTON-NEZ PERCE COUNTY

DEPARTURE PROCEDURE: **Rwys 8, 11, 26, 29**, turn left direct MQG VOR/DME. Continue climb in holding pattern (W, left turns, 066° inbound) to cross MQG VOR/DME at or above 3600.

LEWISTOWN, MT

LEWISTOWN MUNI

TAKE-OFF MINIMUMS: **Rwy 2**, 1800-2 or std. with a min. climb of 280' per NM to 6900. **Rwy 7, 12**, 900-2 or std. with a min. climb of 220' per NM to 6200.
DEPARTURE PROCEDURE: **Rwys 2, 30** turn left. **Rwys 7, 12, 20**, turn right. **Rwy 25**, climb runway heading. **All aircraft** climb direct LWT VORTAC. Continue climb in holding pattern (W, right turns, 094° inbound) to MEA for route of flight.

LEXINGTON, OR

LEXINGTON

TAKE-OFF MINIMUMS: **Rwy 26**, std. with min. climb of 280' per NM to 7600, or 1600-2 ½ for climb in visual conditions. **Rwy 8**, std. with min. climb of 490' per NM to 4200, or 1600-2 ½ for climb in visual conditions.
DEPARTURE PROCEDURE: **Rwys 8, 26**, for climb in visual conditions: cross Lexington Airport at or above 3600.
NOTES: **Rwy 8**, trees 1.42 NM from departure end of runway, 2386' left of centerline, 100' AGL/2159' MSL. Trees 1.48 NM from departure end of runway, 2755' left of centerline, 100' AGL/2179' MSL.

LIBBY, MT

LIBBY

TAKE-OFF MINIMUMS: **Rwy 33**, not authorized. **Rwy 15**, use EYESE RNAV DEPARTURE.

LIVINGSTON, MT

MISSION FIELD (LVM)

AMDT 3 09071 (FAA)

TAKE-OFF MINIMUMS: **Rwys 8, 13, 26, 31**, NA-Environmental.
DEPARTURE PROCEDURE: **Rwys 4, 22**, use LIVINGSTON DEPARTURE.

MADRAS, OR

MADRAS MUNI (S33)

ORIG-A 09043 (FAA)

TAKE-OFF MINIMUMS: **Rwy 16**, std. w/a min. climb of 298' per NM to 3900 or 1100-2½ for climb in visual conditions. **Rwy 22**, std. w/a min. climb of 281' per NM to 3900 or 1100-2½ for climb in visual conditions.
DEPARTURE PROCEDURE: **Rwys 4, 34**, climbing left turn heading 210° and DSD R-348 to DSD VORTAC to 7000 before proceeding on course. **Rwy 16**, climbing right turn heading 210° and DSD R-348 to DSD VORTAC to 7000 before proceeding on course, or... **Rwy 22**, climb heading 216° and DSD R-348 to DSD VORTAC to 7000 before proceeding on course, or... for climb in visual conditions: cross Madras Muni at or above 3400 MSL, then direct DSD VORTAC to 7000 before proceeding on course.

MC CALL, ID

MC CALL MUNI (MYL)

AMDT 2 09127 (FAA)

TAKE-OFF MINIMUMS: **Rwy 34**, NA-Obstacles.
DEPARTURE PROCEDURE: **Rwy 16**, use MCCALL DEPARTURE.

MC CHORD AFB (KTCM)

TACOMA, WA 09127

DEPARTURE PROCEDURE: **Rwy 16**, Track heading 160°, turn left to intercept SEA VORTAC R-168 (V495) to SEA 168/37.1 DME (ALDER). Cross ALDER at or above 4000. After ALDER, maintain MEA/MOCA for route of flight. **Rwy 34**, Track heading 340°, then turn right to intercept SEA VORTAC R-168 (V495) to SEA R-168/37.1 DME (ALDER). Cross ALDER at or above 4000. Maintain MEA/MOCA for route of flight.
TAKEOFF OBSTACLES: **Rwy 16**, Grove of trees 143' AGL/454' MSL, 4892' from DER, 1353' left of centerline. Grove of trees 102' AGL/419' MSL, 2395' from DER, 1028' right of centerline. Trees 136' AGL/447' MSL, 2867' from DER, 1261' left of centerline. Trees 120' AGL/430' MSL, 2594' from DER, 1113' left of centerline. Trees 85' AGL/394' MSL, 2310' from DER, 957' left of centerline. Trees 83' AGL/392' MSL, 2006' from DER, 959' left of centerline. Trees 87' AGL/389' MSL, 1758' from DER, 971' left of centerline. **Rwy 34**, Tree 106' AGL/348' MSL, 2307' from DER, 1038' left of centerline. Tree 121' AGL/370' MSL, 3190' from DER, 526' right of centerline. Aircraft 65' AGL/317' MSL, 186' from DER, 407' left of centerline. Tree 64' AGL/343' MSL, 2260' from DER, 1036' left of centerline. Building 40' AGL/321' MSL, 1668' from DER, 810' left of centerline.

TAKE-OFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

MC MINNVILLE, OR

MC MINNVILLE MUNI (MMV)

AMDT 4 08325 (FAA)

TAKE-OFF MINIMUMS: **Rwy 4**, 400-1¼ or std. w/ min. climb of 238' per NM to 400, or alternatively, with standard take-off minimums and normal 200'/NM climb gradient, take-off must occur no later than 2000' prior to departure end of runway. **Rwy 17**, std. w/ min. climb of 300' per NM to 1200 or 1800-2½ for climb in visual conditions. **Rwy 22**, std. w/ min. climb of 303' per NM to 1400 or 1800-2½ for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 4**, climb heading 038° to intercept UBG R-170 to UBG VOR/DME, thence ...

Rwy 17,22, climbing left turn to intercept UBG R-183 to UBG VOR/DME, thence ... or for climb in visual conditions: cross Mc Minnville Muni at or above 1800 before proceeding on course. **Rwy 35**, climb heading 347° to intercept UBG R-221 to UBG VOR/DME, thence...

... continue climb in UBG VOR/DME holding pattern (S, left turns, 003° inbound) until reaching MEA for route of flight.

NOTE: **Rwy 4**, multiple trees beginning 2040' from departure end of runway, 353' left and 209' right of centerline, up to 100' AGL/339 feet MSL. **Rwy 17**, tree 1719' from departure end of runway, 456' right of centerline, 100' AGL/231' MSL. Tree 1760' from departure end of runway, 627' left of centerline, 100' AGL/257' MSL. **Rwy 22**, multiple trees beginning 282' from departure end of runway, 120' left and 144' right of centerline, up to 100' AGL/246' MSL. Tree 4047' from departure end of runway, 1319' left of centerline, 100' AGL/284' MSL. **Rwy 35**, multiple trees beginning 1551' from departure end of runway, 229' right of centerline, up to 100' AGL/277' MSL.

MEDFORD, OR

ROGUE VALLEY INTL-MEDFORD (MFR)

AMDT 9 09015 (FAA)

TAKE-OFF MINIMUMS: **Rwys 9,27**, NA-Obstacles.

Rwy 14, std. w/ min. climb of 430' per NM to 4600, or 2900-3 for climb in visual conditions. **Rwy 32**, std. with a min. climb of 260' per NM to 6800, or 2900-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 14**, climbing right turn direct OED VORTAC, or for climb in visual conditions, cross Rogue Valley Intl airport at or above 4100 before proceeding direct OED VORTAC...

Rwy 32, climbing right turn direct OED VORTAC, or for climb in visual conditions, cross Rogue Valley Intl airport at or above 4100 before proceeding direct OED VORTAC...

...all aircraft climb in OED VORTAC holding pattern (hold NW, right turns, 153° inbound) to cross OED VORTAC at or above 6400.

MISSOULA, MT

MISSOULA INTL (MSO)

AMDT 8 08213 (FAA)

TAKE-OFF MINIMUMS: **Rwys 7,25**, NA-Obstacles.

DEPARTURE PROCEDURE: **Rwys 11, 29**, use GRZLY DEPARTURE.

MOSES LAKE, WA

GRANT COUNTY INTL

NOTE: **Rwy 14R**, antenna 3902' from departure end of runway, 828' right of centerline, 98' AGL/1268' MSL.

Rwy 18, pole 405' from departure end of runway, 334' right of centerline, 30' AGL/1209' MSL. Windssock 496' from departure end of runway, 371' left of centerline, 16' AGL/1195' MSL. **Rwy 32L**, pole 1326' from departure end of runway, 373' left of centerline, 22' AGL/1202' MSL.

MOUNTAIN HOME AFB (KMUO)

MOUNTAIN HOME, ID 07270

Rwy 12,30, 6700-3*

* Or standard with minimum climb of 270'/NM to 9100.

TAKE-OFF OBSTACLES: **Rwy 12**, Terrain 0' AGL/3028' MSL, 1224' from DER, 744' right of centerline. Terrain 0' AGL/3035' MSL, 824' from DER, 721' right of centerline. Terrain 0' AGL/3035' MSL, 507' from DER, 636' right of centerline. Terrain 0' AGL/3022' MSL, 49' from DER, 202' right of centerline. Terrain 0' AGL/3018' MSL, 148' from DER, 328' left of centerline. Terrain 0' AGL/3016' MSL, 300' from DER, 580' left of centerline. Road/Vehicle 15' AGL/3044' MSL, 1147' from DER, 794' right of centerline. Power pole 35' AGL/3069' MSL, 2914' from DER, 940' right of centerline. Tower 30' AGL/3032' MSL, 1067' from DER, 902' right of centerline. Tower 28' AGL/3039' MSL, 1172' from DER, 796' right of centerline. Tower 45' AGL/3054' MSL, 2152' from DER, 1478' left of centerline. **Rwy 30**, Terrain 0' AGL/2995' MSL, 40' from DER, 492' left of centerline. Terrain 0' AGL/2999' MSL, 370' from DER, 467' right of centerline. Terrain 0' AGL/3006' MSL, 507' from DER, 636' right of centerline. Terrain 0' AGL/3007' MSL, 570' from DER, 653' right of centerline. Road/Vehicle 35' AGL/3019' MSL, 954' from DER, 773' left of centerline.

MOUNTAIN HOME, ID

MOUNTAIN HOME MUNI

TAKE-OFF MINIMUMS: **Rwy 10**, 3500-2 or std. with a min. climb of 305' per NM to 7300. **Rwy 28**, 3500-2 or std. with a min. climb of 290' per NM to 7300.

DEPARTURE PROCEDURE: **Rwy 10**, climbing left turn direct STI NDB. **Rwy 28**, climbing right turn direct STI NDB. All aircraft departing STI NDB bearing 080° CW 340° climb on course. All others continue climb in hold (E, left turns, 271° inbound) to cross STI NDB at or above 7300.

NAMPA, ID

NAMPA MUNI

DEPARTURE PROCEDURE: **Rwy 11**, climbing right turn direct MPA NDB, continue climb in MPA holding pattern (NW, right turns, 145° inbound). Depart MPA NDB at or above 5500 before proceeding on course.

Rwy 29, climb runway heading to 3700 then climbing right turn direct MPA NDB, continue climb in MPA holding pattern (NW, right turns, 145° inbound). Depart MPA NDB at or above 5500 before proceeding on course.

NOTE: **Rwy 11**, 70' AGL tree, 1225' from departure end of runway, 90' right of centerline.

NEWCASTLE, WY

MONDELL FIELD (ECS)

AMDT 3A 09267 (FAA)

TAKE-OFF MINIMUMS: **Rwy 5,17,23,35, NA. Rwy 13**, 200-1 or std. with a min. climb of 275' per NM to 4400.**Rwy 31**, 300-1 or std. with a min. climb of 300' per NM to 4600.DEPARTURE PROCEDURE: **Rwy 31**, climbing left turn. **All aircraft** climb to 5500 via ECS R-143, then climbing right turn direct ECS VOR, continue climb on course.NOTE: **Rwy 13**, fence posts, beginning 299' from DER, 218' left of centerline, up to 10' AGL/4190' MSL. Light on antenna 1951' from DER, 879' left of centerline, 84' AGL/4244' MSL. **Rwy 31**, multiple poles, beginning 74' from DER, 237' right of centerline, up to 20' AGL/4200' MSL. Bush 5787' from DER, 1441' right of centerline, 13' MSL/4363' MSL. Railroad 735' from DER, 314' right of centerline 30' AGL/4202' MSL. Road 207' from DER, 254' right of centerline, 15' AGL/4187' MSL.**NEWPORT, OR**

NEWPORT MUNI

TAKE-OFF MINIMUMS: **Rwy 2, NA. Rwy 16**, 500-2 or std. with a min. climb of 310' per NM to 800.DEPARTURE PROCEDURE: **Rwy 2, NA. Rwy 16**, turn right. **Rwy 34**, turn left. Aircraft departing via ONP R-180 CW R-320 depart on course. All others continue climbing via ONP R-200 to 1500 then climbing left turn direct ONP VORTAC. Cross ONP VORTAC at or above 2200.**NORTH BEND, OR**

SOUTHWEST OREGON RGNL (OTH)

AMDT 4B 09071 (FAA)

TAKE-OFF MINIMUMS: **Rwy 4**, 800-2 or std. with a min. climb of 340' per NM to 900. **Rwy 13**, 800-2. **Rwys 16,34, NA**-Rwy closed. **Rwy 31**, 300-2 or std. with a min. climb of 240' per NM to 400.DEPARTURE PROCEDURE: **Rwys 4,31**, turn left. **Rwys 13, 22**, turn right. **All aircraft** climb via OTH VORTAC R-250 to 1300 then climbing right turn direct OTH VORTAC.NOTE: **Rwy 13**, spire 3468' from departure end of runway, 1128' left of centerline, 55' AGL/243' MSL, multiple trees beginning 3068' from departure end of runway, 78' left of centerline, up to 132' AGL/291' MSL.**OAK HARBOR, WA**

A J EISENBERG (OKH)

ORIG-A 09071 (FAA)

TAKE-OFF MINIMUMS: **Rwy 7**, 300-1. **Rwy 25**, 300-1DEPARTURE PROCEDURE: **Rwy 7**, climb via heading 071° to 2000, then climbing right turn direct CVV VOR/DME. Continue climb on course. **Rwy 25**, climb via heading 251° to 2100, then climbing left turn direct CVV VOR/DME. Continue climb on course.NOTE: **Rwy 7**, multiple trees beginning 1167' from DER, 212' left of centerline, up to 80' AGL/319' MSL. Multiple trees beginning 664' from DER, 208' right of centerline, up to 80' AGL/299' MSL. Fence 612' from DER, right and left of centerline, 10' AGL/229' MSL. Multiple bushes beginning 240' from DER, 64' left of centerline, up to 8' AGL/227' MSL. **Rwy 25**, cars on road 87' from DER, left and right of centerline, up to 15' AGL/174' MSL. Multiple trees beginning 2271' from DER, right and left of centerline, up to 80' AGL/279' MSL.**OLYMPIA, WA**

OLYMPIA RGNL (OLM)

AMDT 5A 09127 (FAA)

TAKE-OFF MINIMUMS: **Rwy 17**, 300-2 or std. with a min. climb of 706' per NM to 600, or 2200-3 for climb in visual conditions.DEPARTURE PROCEDURE: **Rwy 8**, climb heading 085° to 1000 then climbing left turn direct OLM VORTAC, thence... **Rwy 17**, climb heading 172° to 1200 then climbing right turn direct OLM VORTAC, thence... or climb in visual conditions to cross OLM VORTAC at or above 2300, thence... **Rwys 5,26,35**, climbing right turn direct OLM VORTAC, thence... .

...continue climb in OLM VORTAC holding pattern (south, right turn, 356° inbound) to cross OLM VORTAC at or above MEA/MCA for route of flight.

NOTE: **Rwy 8**, multiple trees beginning 880' from DER, 214' left of centerline, up to 100' AGL/343' MSL. Multiple trees beginning 1636' from DER, 131' right of centerline, up to 100' AGL/320' MSL. **Rwy 17**, multiple trees beginning 1008' from DER, 24' left of centerline, up to 100' AGL/490' MSL. Multiple trees beginning 752' from DER, 3' right of centerline, up to 100' AGL/370' MSL. **Rwy 26**, multiple trees and WSK on building beginning 475' from DER, 595' left of centerline, up to 100' AGL/330' MSL. Multiple trees beginning 338' from DER, 339' right of centerline, up to 100' AGL/309' MSL. **Rwy 35**, multiple trees beginning 2176' from DER, 198' left of centerline, up to 100' AGL/313' MSL. Multiple trees and field light on hangar beginning 657' from DER, 621' right of centerline, up to 100' AGL/315' MSL.**OMAK, WA**

OMAK

TAKE-OFF MINIMUMS: **Rwy 17**, 2200-2 or std. with a min. climb of 300' per NM to 4200. **Rwy 35, NA**.DEPARTURE PROCEDURE: **Rwy 17**, use GETNG RNAV DEPARTURE. **Rwy 35, NA**.**ONTARIO, OR**

ONTARIO MUNI (ONO)

AMDT 3 08325 (FAA)

DEPARTURE PROCEDURE: **Rwy 32**, climb to 9600 on a heading between 010° CW to 141° from departure end of runway or minimum climb of 280' per NM to 9600 for all other courses.NOTE: **Rwy 14**, multiple trees, poles, and buildings beginning 90' from departure end of runway, 157' right of centerline up to 120' AGL/2314' MSL. Multiple trees, poles, and buildings beginning 502' from departure end of runway, 506' left of centerline up to 120' AGL/2314' MSL. **Rwy 32**, multiple trees, poles, and buildings beginning 340' from departure end of runway, 405' left of centerline up to 100' AGL/2458' MSL. Multiple trees, poles, and buildings beginning 2' from departure end of runway, 472' right of centerline up to 100' AGL/2431' MSL.**PASCO, WA**

TRI-CITIES

DEPARTURE PROCEDURE: **All runways**, climb runway heading to 1000, thence... **Rwy 12**, turn left. All others turn right. **All aircraft** climb direct PSC VOR/DME before proceeding on course.

PENDLETON, OR

EASTERN OREGON RGNL AT PENDLETON
(PDT)

AMDT 3 09183 (FAA)

DEPARTURE PROCEDURE: **Rwys 7, 29, 34**, climbing left turn direct PDT VORTAC, thence...

Rwys 11, 16, climbing right turn direct PDT VORTAC, thence...

Rwy 25, climb direct PDT VORTAC, thence...

...continue climb in PDT VORTAC holding pattern (West, left turn, 073° inbound) to cross PDT VORTAC at or above MEA before proceeding on course.

NOTE: **Rwy 16**, multiple trees beginning 232' from DER, 348' right of centerline, up to 100' AGL/1579' MSL.

Rwy 25, multiple antennas and terrain beginning 203' from DER, 259' left of centerline, up to 13' AGL/1512' MSL. **Rwy 29**, terrain 189' from DER, 247' left of centerline, 1493' MSL.

PINEDALE, WY

PINEDALE/RALPH WENZ FIELD (PNA)

AMDT 2 09295 (FAA)

TAKE-OFF MINIMUMS: **Rwy 29**, std. with a min. climb of 310' per NM to 8300, or 4900-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 11**, climbing right turn to 10000 via heading 190° and BPI R-040 to BPI VOR/DME before proceeding on course. **Rwy 29**, climbing left turn to 10000 via heading 230° and BPI R-020 to BPI VOR/DME before proceeding on course or for climb in visual conditions: cross Pinedale/Ralph Wenz Field at or above 11800 before proceeding on course.

PLENTYWOOD, MT

SHER-WOOD

NOTE: **Rwy 12**, multiple bushes beginning 47' from departure end of runway, 71' left of centerline, up to 12' AGL/2251' MSL. Multiple bushes beginning 362' from departure end of runway, 514' right of centerline, up to 12' AGL/2251' MSL. **Rwy 30**, multiple bushes and road beginning 68' from departure end of runway, 75' right of centerline, up to 12' AGL/2303' MSL. Multiple bushes beginning 217' from departure end of runway, 60' left of centerline, up to 12' AGL/2296' MSL.

POCATELLO, ID

POCATELLO RGNL (PIH)

AMDT 7 09351 (FAA)

DEPARTURE PROCEDURE: use KNURL ONE DEPARTURE.

POLSON, MT

POLSON

TAKE-OFF MINIMUMS: **Rwy 18**, N/A-extremely precipitous terrain. **Rwy 36**, standard with a min. climb of 270' per NM to 8400'.

DEPARTURE PROCEDURE: **Rwy 36**, Use ANGLIL RNAV DEPARTURE.

NOTES: **Rwy 36**, Road 509' from departure end of runway, 2955' MSL. Trees 2.39 NM from departure end of runway, 3383' left of centerline, 100' AGL/3179 MSL.

Rapidly rising precipitous terrain left and right of centerline running along southern Flathead River ridges.

PORT ANGELES, WA

PORT ANGELES CGAS

DEPARTURE PROCEDURE: Copter departure, climb from landing area direct to EDIZ HOOK NDB.

Continue climb in holding pattern (NE, right turns, 237° inbound) to MEA for direction of flight.

WILLIAM R FAIRCHILD INTL

DEPARTURE PROCEDURE: **Rwys 8,13,26,31**, use WATR FIVE DEPARTURE.

PORTLAND, OR

PORTLAND INTL (PDX)

AMDT 6 09015 (FAA)

TAKE-OFF MINIMUMS: **Rwy 3**, 500-3 or std. w/ min. climb of 400' per NM to 600. **Rwy 10L/R**, std. w/ min. climb of 270' per NM to 2900. **Rwy 21**, std. w/ min. of 310' per NM to 1800.

DEPARTURE PROCEDURE: **Rwy 3**, climb heading 025° to 700, then climbing left turn direct BTG VORTAC, thence... **Rwys 10L,10R**, climb heading 099° to 500, then climbing left turn direct BTG VORTAC, thence... **Rwy 21**, climb heading 205.03 to 500, then climbing right turn direct BTG VORTAC, thence... **Rwys 28L,28R**, climb heading 279° to 500, then climbing right turn direct BTG VORTAC, thence... continue climb in BTG VORTAC holding pattern (hold NW, right turns, 149° inbound) to cross BTG VORTAC at or above MCA/MEA before proceeding on course.

NOTE: **Rwy 3**, signs, tower, trees, and vehicle on road beginning 468' from departure end of runway, 28' left of centerline, up to 100' AGL/449' MSL. Poles, trees, and vehicle on road beginning 609' from departure end of runway, 7' left of centerline, up to 100' AGL/416' MSL. **Rwy 10L**, rising terrain and vehicle on road beginning 7' from departure end of runway, 376' left of centerline, up to 17' AGL/60' MSL. **Rwy 10R**, pole 1996' from departure end of runway, 758' right of centerline, 54' AGL/74' MSL. note: **Rwy 21**, trees beginning 1319' from departure end of runway, 155' right of centerline, up to 100' AGL/318' MSL. Poles and trees beginning 353' from departure end of runway, 36' left of centerline, up to 100' AGL/317' MSL. **Rwy 28L**, trees 1873' from departure end of runway, 836' left of centerline, 50' AGL/ 88' MSL.

Rwy 28R, multiple signs, poles, and vehicle on road beginning 876' from departure end of runway, 654' right of centerline, up to 27' AGL/69' MSL.

PORTLAND, OR (CON'T)

PORTLAND-HILLSBORO

TAKE-OFF MINIMUMS: **Rwy 30**, 200-1¼ or std. with a min. climb of 223' per NM to 500. Alternatively, with standard take-off minimums and a normal 200'/NM climb gradient, take-off must occur no later than 1600' prior to departure end of runway.

DEPARTURE PROCEDURE: **Rwy 12**, climbing right turn direct UBG VOR/DME... **Rwys 2, 20, 30**, climbing left turn direct UBG VOR/DME...

...all aircraft climb in UBG VOR/DME holding pattern (west, right turn, 108° inbound) to cross UBG VOR/DME at or above MEA/MCA for direction of flight before proceeding on course.

NOTE: **Rwy 2**, multiple roads beginning 246' from departure end of runway, 3' right of centerline, up to 15' AGL/220' MSL. **Rwy 12**, multiple trees beginning 1842' from departure end of runway, 222' left of centerline, up to 125' AGL/324' MSL. Multiple trees beginning 3629' from departure end of runway, 46' right of centerline, up to 143' AGL/332' MSL. **Rwy 20**, multiple trees and pole beginning 967' from departure end of runway, 118' left of centerline, up to 93' AGL/292' MSL. Vent of hangar 63' from departure end of runway, 428' left of centerline, 26' AGL/225' MSL. Multiple trees and antenna on building beginning 965' from departure end of runway, 449' right of centerline, up to 74' AGL/273' MSL. **Rwy 30**, multiple trees beginning 1664' from departure end of runway, 623' right of centerline, up to 194' AGL/363' MSL. Pole 702' from departure end of runway, 603' left of centerline, 26' AGL/215' MSL.

PORTLAND-TROUTDALE

TAKE-OFF MINIMUMS: **Rwy 7**, 3600-2 or std. with a min. climb of 380' per NM to 4100. **Rwy 25**, 900-2 or std. with a min. climb of 360' per NM to 1000.

DEPARTURE PROCEDURE: **Rwy 7**, turn left. **Rwy 25**, turn right. All aircraft climb via BTG R-125 direct BTG VORTAC. Continue climb on BTG R-329 within 10 NM to cross BTG VORTAC at or above: BTG R-355 CW R-055 or R-085 CW R-115 5000; all others 2500.

POWELL, WY

POWELL MUNI

TAKE-OFF MINIMUMS: **Rwy 3, 16, 21, 34**, NA.

DEPARTURE PROCEDURE: **Rwy 13**, turn right.

Rwy 31, turn left. All aircraft climb direct COD VOR/DME. Aircraft departing COD R-350 CW R-170 climb on course. All others continue climb in COD VOR/DME holding pattern (N, left turns, 189° inbound) to cross COD VOR/DME at or above 8800

PRINEVILLE, OR

PRINEVILLE (S39)

AMDT 1 08213 (FAA)

TAKE-OFF MINIMUMS: **Rwy 10**, std. w/min. climb of 350 feet per NM to 6500, or 2400-3 for climb in visual conditions. **Rwy 15**, std. w/min. climb of 470' per NM to 6200, or 2400-3 for climb in visual conditions. **Rwy 28**, std. w/min. climb of 450' per NM to 6700, or 2400-3 for climb in visual conditions. **Rwy 33**, std. w/min. climb of 380' per NM to 6700, or 2400-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 10**, climb heading 102° to 6500 before proceeding on course or for climb in visual conditions cross Prineville Muni airport at or above 5600 before proceeding on course. **Rwy 15**, climb heading 154° to 6200 before proceeding on course or for climb in visual conditions cross Prineville Muni airport at or above 5600 before proceeding on course. **Rwy 28**, climb heading 282° to 6700 before proceeding on course or for climb in visual conditions cross Prineville Muni airport at or above 5600 before proceeding on course. **Rwy 33**, climb heading 334° to 6700 before proceeding on course or for climb in visual conditions cross Prineville Muni airport at or above 5600 before proceeding on course.

NOTE: **Rwy 10**, trees beginning 2693' from departure end of runway, 545' right of centerline, up to 100' AGL/3339' MSL. **Rwy 15**, trees beginning 1129' from departure end of runway, 697' right of centerline, up to 100' AGL/3319' MSL. **Rwy 28**, trees beginning 1803' from departure end of runway, 74' right of centerline, up to 100' AGL/3319' MSL. **Rwy 33**, trees beginning 2636' from departure end of runway, 379' right of centerline, up to 100' AGL/3319' MSL.

PULLMAN-MOSCOW, WA

PULLMAN-MOSCOW RGNL

TAKE-OFF MINIMUMS: **Rwy 5**, 300-1¼ with a min. climb of 278' per NM to 4400, or 4600-3 for climb in visual conditions. **Rwy 23**, 300-1 or std. with a min. climb of 361' per NM to 4700.

DEPARTURE PROCEDURE: **Rwy 5**, climbing left turn direct PUW VOR/DME, cross PUW VOR/DME at or above 4700, continue climb in PUW VOR/DME holding pattern (SW, left turn, 032° inbound) to cross PUW VOR/DME at or above MEA for direction of flight, or for climb in visual conditions; cross Pullman-Moscow Rgnl at or above 4500. **Rwy 23**, climbing left turn via PUW VOR/DME R-021, cross PUW VOR/DME at or above 4700, continue climb in PUW VOR/DME holding pattern (SW, left turn, 032° inbound) to cross PUW VOR/DME at or above MEA for direction of flight.

NOTE: **Rwy 5**, multiple trees and terrain left and right of centerline, beginning 614' from departure end of runway, 424' right of centerline up to 50' AGL/2677' MSL. Terrain 3503' from departure end of runway, 770' left of centerline, 50' AGL/2608' MSL. **Rwy 23**, multiple trees, terrain, fences, poles, and tanks beginning 669' from departure end of runway, 412' right of centerline, up to 52' AGL/2769' MSL.

PUYALLUP, WA

PIERCE COUNTY-THUN FIELD (PLU)
AMDT 1A 09071 (FAA)

TAKE-OFF MINIMUMS: **Rwy 16, 34**, 300-1.

DEPARTURE PROCEDURE: **Rwy 16**, climbing right turn. **Rwy 34**, climb runway heading. **All aircraft** climb via SEA R-158 to COTNY INT/SEA 18.1 DME.

Continue in COTNY holding pattern (Hold S, left turns, 338° inbound) to depart COTNY at or above: 001° CW 090° 3500, 090° 3500, 091° CW 120° 10,400, 121° CW 170° 2700, 171° CW 360° 1500.

NOTE: **Rwy 16**, light pole 511' from DER, 567' right of centerline, 40' AGL/552' MSL. Multiple poles on building beginning 187' from DER, 416' left of centerline, up to 575' MSL. Multiple trees beginning 363' from DER, 656' left of centerline to 540' right of centerline, up to 662' MSL. Vehicles on road beginning 1149' from DER, 512' right of centerline, up to 15' AGL/582' MSL. Terrain beginning 1293' from DER, 529' left of centerline to 352' right of centerline, up to 581' MSL. Pipe 1520' from DER, 303' left of centerline, 574' MSL. **Rwy 34**, multiple trees beginning 58' from DER, 591' left of centerline to 1029' right of centerline, up to 694' MSL. Flagpole 1155' from DER, 464' left of centerline, 578' MSL. Building 564' from DER, 410' left of centerline, 555' MSL.

RAWLINS, WY

RAWLINS MUNI/HARVEY FIELD

TAKE-OFF MINIMUMS: **Rwy 4**, 600-2 or std. with a min. climb of 440' per NM to 7500. **Rwy 22**, 1500-2 or std. with a min climb of 365' per NM to 8700. **Rwys 10, 28**, NA.

DEPARTURE PROCEDURE: **Rwy 4**, turn right.

Rwy 22, turn left. Climb to 10000 via RWL R-200 and CKW R-080 to CKW VOR/DME then via assigned route. Aircraft departing eastbound V4 or V6 climb via RWL R-200 to assigned route then climb on course.

REDMOND, OR

ROBERTS FIELD (RDM)
AMDT 5 09183 (FAA)

TAKE-OFF MINIMUMS: **Rwy 22**, std. w/ min. climb of 269' per NM to 4700. **Rwy 28**, std. w/ min. climb of 276' per NM to 4800.

DEPARTURE PROCEDURE: **Rwy 4**, climbing left turn via heading 265° and DSD R-047 to DSD VORTAC, climb in DSD VORTAC holding pattern (hold North, right turn, 168° inbound) to cross DSD VORTAC at or above MEA for route of flight before proceeding on course. **Rwy 10**, climbing right turn via heading 240° and DSD R-090 to DSD VORTAC, climb in DSD VORTAC holding pattern (hold North, right turn, 168° inbound) to cross DSD VORTAC at or above MEA for route of flight before proceeding on course. **Rwy 22**, climb heading 222° and DSD R-090 to DSD VORTAC, climb in DSD VORTAC holding pattern (hold North, right turn, 168° inbound) to cross DSD VORTAC at or above MEA for route of flight before proceeding on course. **Rwy 28**, climbing left turn via heading 275° and DSD R-045 to DSD VORTAC, climb in DSD VORTAC holding pattern (hold North, right turn, 168° inbound) to cross DSD VORTAC at or above MEA for route of flight before proceeding on course.

NOTE: **Rwy 28**, numerous trees beginning 1' from DER, 356' right of centerline, 12' AGL/3079' MSL. Tree 364' from DER, 448' left of centerline, 15' AGL/3054' MSL.

RENTON, WA

RENTON MUNI (RNT)
AMDT 7 09351 (FAA)

TAKE-OFF MINIMUMS: **Rwy 16**, std. with a min. climb of 405' per NM to 800, or 1100-2½ for climb in visual conditions. **Rwy 34**, 500-2¼ or std. with a min. climb of 315' per NM to 700.

DEPARTURE PROCEDURE: **Rwy 16**, climb heading 157° to 700, then climbing right turn direct SEA VORTAC, thence..., or for climb in visual conditions: cross Renton Muni Airport westbound at or above 1000 MSL, then proceed on SEA R-029 to SEA VORTAC, thence... **Rwy 34**, Climb heading 337° to 700, then climbing left turn direct SEA VORTAC thence...
...Climb in SEA VORTAC holding pattern (East, left turns, 290° inbound) to cross SEA VORTAC at or above MEA/MCA for direction of flight.

NOTES: **Rwy 16**, trees, towers, lights and blast shield beginning 185' from DER, 4' left of centerline, up to 100' AGL/574' MSL. Trees, lights and sign beginning 40' from DER, 54' right of centerline, up to 100' AGL/297' MSL. **Rwy 34**, Trees and terrain beginning 1.6 NM from DER, 104' left of centerline, up to 100' AGL/485' MSL. Trees, terrain and wood piling beginning 75' from DER, 7' right of centerline, up to 100' AGL/426' MSL.

REXBURG, ID

REXBURG-MADISON COUNTY

DEPARTURE PROCEDURE: **Rwy 17**, climbing right turn. **Rwy 35**, climbing left turn. **All aircraft** climb via IDA VOR/DME R-015 to RIGBY Int to MEA for route of flight before proceeding on course.

NOTE: **Rwy 17**, 100' AGL trees 125' from departure end of runway, 350' left of centerline. **Rwy 35**, 100' AGL trees 350' from departure end of runway, 450' right of centerline. 100' AGL trees 750' from departure end of runway, 500' left of centerline.

RICHLAND, WA

RICHLAND

TAKE-OFF MINIMUMS: **Rwy 1**, 200-1 or std. w/min. climb of 310' per NM to 700. **Rwy 19**, std. w/min. climb of 480' per NM to 2300, or 1800-2½ for climb in visual conditions. **Rwy 26**, 500-2½ or std. w/min. climb of 309' per NM to 1000.

DEPARTURE PROCEDURE: **Rwy 1**, climbing right turn via heading 070° and PSC R-301 to PSC VOR/DME, thence...**Rwy 8**, climbing right turn direct PSC VOR/DME, thence...**Rwy 19**, climbing right turn via heading 040° and PSC R-269 to PSC VOR/DME, or for climb in visual conditions: cross Richland Airport at or above 2000 then proceed on PSC R-269, to PSC VOR/DME thence...**Rwy 26**, climbing right turn via heading 070° and PSC R-287 to PSC VOR/DME, thence... climb in PSC VOR/DME holding pattern (hold East, right turn, 291° inbound) to cross PSC VOR/DME at or above MEA for route of flight before proceeding on course.

NOTE: **Rwy 1**, crane and multiple poles 752' from departure end of runway, 477' right of centerline, up to 110' AGL/520' MSL. Trees 43' from departure end of runway, 414' left of centerline, 100' AGL/407' MSL. **Rwy 8**, multiple trees and railroad beginning 400' from departure end of runway, 252' right of centerline, up to 100' AGL/469' MSL. Multiple trees and railroad beginning 204' from departure end of runway, 241' left of centerline, up to 100' AGL/469' MSL. **Rwy 19**, multiple trees 64' from departure end of runway, 169' right of centerline, up to 100' AGL/679' MSL. Multiple trees, terrain, and buildings 22' from departure end of runway, 30' left of centerline, up to 100' AGL/479' MSL. **Rwy 26**, multiple trees, fence, and terrain beginning 458' from departure end of runway, 230' left of centerline, up to 100' AGL/839' MSL. Multiple posts, antenna, and terrain beginning 164' from departure end of runway, 255' right of centerline, up to 18' AGL/417' MSL.

RIVERTON, WY

RIVERTON RGNL (RIW)

AMDT 1 10042 (FAA)

DEPARTURE PROCEDURE: **Rwys 1, 10, 19, 28**, climbing right turn direct RIW VOR/DME. **All Aircraft** climb in RIW holding pattern (hold East, right turns, 287° inbound) to MEA for direction of flight.

NOTES: **Rwy 1**, sage brush beginning 35' from DER, left and right of centerline, up to 3' AGL/5499' MSL. **Rwy 10**, sage brush beginning 20' from DER, left and right of centerline, up to 3' AGL/5466' MSL. **Rwy 19**, sage brush beginning 49' from DER, 171' right of centerline, up to 3' AGL/5479' MSL. Windstocks beginning 154' from DER, 268' right of centerline, up to 28' AGL/5468' MSL. **Rwy 28**, sage brush, tower, and pole beginning 54' from DER, 154' right of centerline, up to 59' AGL/5679' MSL. Sage brush, fence, and poles beginning 132' from DER, 27' left of centerline, up to 67' AGL/5647' MSL.

ROCK SPRINGS, WY

ROCK SPRINGS-SWEETWATER COUNTY (RKS)

AMDT 6 10098 (FAA)

DEPARTURE PROCEDURE: **Rwy 3**, climb heading 032° to 8000 then climbing left turn direct OCS VOR/DME, continue climb in OCS VOR/DME holding pattern (hold East, right turns, 260° inbound) to cross OCS VOR/DME at or above MEA for route of flight. **Rwy 9**, climb heading 090° to 8200 then climbing left turn direct OCS VOR/DME, continue climb in OCS VOR/DME holding pattern (hold East, right turns, 260° inbound) to cross OCS VOR/DME at or above MEA for route of flight. **Rwy 21**, climb heading 212° to 8400, then climbing right turn direct OCS VOR/DME, continue climb in OCS VOR/DME holding pattern (hold East, right turns, 260° inbound) to cross OCS VOR/DME at or above MEA for route of flight. **Rwy 27**, climb heading 270° to 7900, then climbing right turn via OCS R-291 to OCS VOR/DME, continue climb in OCS VOR/DME holding pattern (hold East, right turns, 260° inbound) to cross OCS VOR/DME at or above MEA for route of flight.

NOTE: **Rwy 3**, vehicle on road beginning 22' from DER, 120' left of centerline, up to 20' AGL/6760' MSL, bushes beginning 178' from DER, 517' right of centerline, up to 15' AGL/6755' MSL. **Rwy 21**, bush 53' from DER, 221' left of centerline, 15' AGL/6737' MSL.

RONAN, MT

RONAN (7S0)

ORIG 09295 (FAA)

TAKE-OFF MINIMUMS: **Rwy 16**, std. w/min. climb of 260' per NM to 9900 or 6100-3 for climb in visual conditions. **Rwy 34**, std. w/min. climb of 250' per NM to 9900 or 6100-3 in visual conditions.

DEPARTURE PROCEDURE: **Rwy 16**, climb to 8800 on a heading between 177° CW to 336° from DER or for climb in visual conditions, cross Ronan airport at or above 9000 before proceeding on course. **Rwy 34**, climb to 8800 on a heading between 336° CCW to 177° from DER or for climb in visual conditions, cross Ronan airport at or above 9000 before proceeding on course.

NOTE: **Rwy 16**, tree 485' from DER, 386' left of centerline 50' AGL/3149' MSL. **Rwy 34**, building 158' from DER, 370' left of centerline 40' AGL/3130' MSL. Tree 1358' from DER, 556' left of centerline 50' AGL/3149' MSL.

ROSEBURG, OR

ROSEBURG RGNL (RBG)

AMDT 5A 08297 (FAA)

TAKE-OFF MINIMUMS: **Rwy 16**, std. with a min. climb of 642' per NM to 2000, or 1700-3 for climb in visual conditions. **Rwy 34**, std. with a min. climb of 760' per NM to 2000, or 1700-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 16**, climb direct RBG VOR/DME, or climb in visual conditions to cross Roseburg Airport southbound at or above 2200, then direct RBG VOR/DME. Then via RBG R-157 and right turn direct RBG VOR/DME to cross at or above the MCA or MEA for route of flight. **Rwy 34**, climb via heading 342° to 4000, or climb in visual conditions to cross Roseburg Airport northbound at or above 2200 and then via heading 342° to 4000. Then climbing left turn direct RBG VOR/DME, to cross RBG VOR/DME at or above MCA or MEA for route of flight. Aircraft that have not reached the MCA or MEA for route of flight continue climb via RBG R-157 and right turn direct RBG VOR/DME.

NOTE: **Rwy 16**, tower 1.56 NM from departure end of runway, 2231' right of centerline, 50' AGL/1201' MSL, tree 1.47 NM from departure end of runway, 1560' right of centerline, 21' AGL/980' MSL, tree 1.46 NM from departure end of runway, 1298' right of runway centerline, 45' AGL/964' MSL, pole 1.36 NM from departure end of runway, 921' right of centerline, 75' AGL/914' MSL, rod on airway beacon 1.29 NM from departure end of runway, 409' right of centerline, 52' AGL/891' MSL, tree 655' from departure end of runway, 347' right of runway centerline, 93' AGL/593' MSL, obstruction light on pole 691' from departure end of runway, 187' right of runway centerline, 117' AGL/557' MSL. **Rwy 34**, tree 1.10 NM from departure end of runway, 2003' left of runway centerline, 60' AGL/1179' MSL. Tree 5165' from departure end of runway, 1744' left of centerline, 64' AGL/1023' MSL. Obstruction light on pole 4850' from departure end of runway, 56' left of centerline, 15' AGL/894' MSL. Tree 4785' from departure end of runway, 48' left of runway centerline, 23' AGL/862' MSL. Tree 1.41 NM from departure end of runway, 1826' left of runway centerline, 17' AGL/896' MSL. Tree 4079' from departure end of runway, 508' left of runway centerline, 21' AGL/780' MSL. Tree 5067' from departure end of runway, 265' right of centerline, 43' AGL/802' MSL. Tree 4260' from departure end of runway, 345' right of centerline, 42' AGL/761' MSL. Tree 1465' from departure end of runway 329' right of runway centerline, 100' AGL/642' MSL. Tree 913' from departure end of runway, 217' right of runway centerline, 100' AGL/622' MSL. Tree 647' from departure end of runway, 345' right of runway centerline, 100' AGL/615' MSL. Hill 1065' from departure end of runway, 299' right of runway centerline 608' MSL. Trees beginning 60' from departure end of runway, 117' left of runway centerline, up to 16' AGL/554' MSL. Trees beginning 242' from departure end of runway, 209' right of runway centerline, up to 56' AGL/584' MSL. Vehicle on road 265' from departure end of runway, 229' right of runway centerline, 15' AGL/560' MSL. Multiple signs beginning 792' from departure end of runway, 550' left of runway centerline, up to 60' AGL/565' MSL. Bush 94' from departure end of runway, 228' right of runway centerline, 19' AGL/547' MSL. Bush 202' from departure end of runway, 92' left of centerline, 7' AGL/535' MSL. Pole 640' from departure end of runway, 354' left of runway centerline, 29' AGL/557' MSL.

SALEM, OR

MCNARY FIELD

TAKE-OFF MINIMUMS: **Rwy 13**, 600-2 or std. with a min. climb of 240' per NM to 800. **Rwy 16**, 600-2 or std. with a min. climb of 340' per NM to 800.

DEPARTURE PROCEDURE: Comply with SIDs or; **Rwys 31, 34**, turn right. **Rwy 16**, turn left. **Rwy 13**, climbing heading 130°. **All aircraft** climb direct TURNO LOM/Int. Continue climb in holding (SE, left turns, 310° inbound) to cross TURNO LOM/INT at or above MEA for route of flight.

SALMON, ID

LEMHI COUNTY

TAKE-OFF MINIMUMS: **Rwy 17**, NA. **Rwy 35**, 4300-5 or std. with a min. climb of 390' per NM to 8000.

DEPARTURE PROCEDURE: **Rwy 17**, NA. **Rwy 35**, climb runway heading to 8000, then climbing left turn to 11,300 direct LKT VOR/DME before proceeding on course.

SANDPOINT, ID

SANDPOINT

TAKE-OFF MINIMUMS: **Rwy 1**, 4200-2 or std. with a min. climb of 520' per NM to 5800. **Rwy 19**, 2200-2 or std. with a min. climb of 480' per NM to 4600.

DEPARTURE PROCEDURE: **Rwy 1**, climbing right turn to COE VOR/DME via heading 200° and COE R-002. **Rwy 19**, climbing left turn to COE VOR/DME via heading 140° and COE R-002.

SARATOGA, WY

SHIVELY FIELD

TAKE-OFF MINIMUMS: **Rwy 23**, 400-1 or std. with a min. climb of 220' per NM to 7400.

DEPARTURE PROCEDURE: **Rwy 5**, turn left heading 280°. **Rwy 23**, turn right heading 340°. **All aircraft** climb to 9000 via 310° bearing from SAA NDB then continue climb on course.

SCAPPOOSE, OR

SCAPPOOSE INDUSTRIAL AIRPARK

DEPARTURE PROCEDURE: **Rwy 15**, climbing left turn direct BTG VORTAC. **Rwy 33**, climbing right turn direct BTG VORTAC. Aircraft departing BTG R-160 CW R-329 climbing left turn on course. All others climb in BTG VORTAC holding pattern (NW, right turns, 149° inbound) to cross BTG VORTAC at or above MEA/MCA for direction of flight.

NOTE: **Rwy 15**, 158' MSL tree 470' from departure end of runway, 499' right of centerline. **Rwy 33**, cross departure end of runway 33 at or above 35' AGL/90' MSL. 130' MSL tree 613' from departure end of runway, 414' right of centerline; 142' MSL trees 1343' from departure end of runway, 348' right of centerline.

SCOBEY, MT

SCOBEY

TAKE-OFF MINIMUMS: **Rwy 12**, std. with a min. climb of 280' per NM to 3400.

SEATTLE, WA

BOEING FIELD/KING COUNTY INTL

TAKE-OFF MINIMUMS: **Rwy 13L**, 500-3 w/ min. climb of 232' per NM to 800, or 1000-2½ for climb in visual conditions. **Rwy 13R**, std. w/ a min. climb of 476' per NM to 900, or 500-3 w/ a min. climb of 386' per NM to 900, or 1000-2½ for climb in visual conditions. **Rwy 31L**, std. w/ a min. climb of 386' per NM to 800, or 300-1½ w/ min. climb of 235' per NM to 800, or 1000-2½ for climb in visual conditions. **Rwy 31R**, std. w/ a min. climb of 334' per NM to 900, or 400-1¼ w/ min. climb of 216' per NM to 900, or 1000-2½ for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwys 13L/R**, climbing right turn. **Rwys 31L/R**, climbing left turn. All aircraft climb direct to SEA VORTAC, continue climb in SEA VORTAC holding pattern (hold east, left turns, 290° inbound) to cross SEA VORTAC at or above 3000. For climb in visual conditions cross Boeing Field/King County Intl Airport at or above 900, then climb to 3000 via SEAR-344 to SEA VORTAC, continue climb in SEA VORTAC holding pattern (hold east, left turns, 290° inbound) to cross SEA VORTAC at or above 3000.

NOTES: **Rwy 13L**, multiple trees, towers, antennas and building beginning 402' from departure end of runway, 411' left of centerline, up to 127' AGL/479' MSL.

Rwy 13R, multiple trees and poles beginning 35' from departure end of runway, 154' left of centerline, up to 66' AGL/485' MSL. Multiple trees and poles beginning 501' from departure end of runway, 3' right of centerline, up to 77' AGL/195' MSL. **Rwy 31L**, multiple trees, fence, and building beginning 250' from departure end of runway, 253' left of centerline, up to 71' AGL/101' MSL. Multiple trees and floodlights beginning 1245' from departure end of runway, 447' right of centerline, up to 71' AGL/239' MSL. **Rwy 31R**, multiple trees, hangers, towers, poles and building beginning 12' from departure end of runway, 389' right of centerline, up to 103' AGL/350' MSL. Multiple obstruction lights beginning 214' from departure end of runway, 99' left of centerline, up to 71' AGL/101' MSL.

SEATTLE-TACOMA INTL (SEA)

AMDT 4 08325 (FAA)

DEPARTURE PROCEDURE: **Rwys 16L, 16C, 16R**, climb to 1000 via heading 163°, then climbing right turn direct SEA VORTAC, thence...

Rwys 34L, 34C, 34R, climb to 1000 via heading 343°, then climbing left turn direct SEA VORTAC, thence...
...climb in SEA VORTAC holding pattern (hold SE, left turns, 310° inbound) to MEA/MCA for route of flight.

NOTE: **Rwy 16L**, trees beginning 2908' from departure end of runway, 1064' right of centerline, up to 100' AGL/476' MSL. **Rwy 16C**, trees beginning 4477' from departure end of runway, 484' right of centerline, up to 100' AGL/507' MSL. **Rwy 16R**, trees, antenna on building and light pole beginning 488' from departure end of runway, 436' left of centerline, up to 100' AGL/507' MSL. Trees beginning 1137' from departure end of runway, 587' right of centerline, up to 100' AGL/468' MSL. **Rwy 34L**, fence 189' from departure end of runway, 401' right of centerline, up to 12' AGL/420' MSL. Trees beginning 4010' from departure end of runway, 857' left of centerline, up to 100' AGL/522' MSL.

SHELBY, MT

SHELBY

TAKE-OFF MINIMUMS: **Rwy 5**, 200-1¼ or std. w/ min. climb of 212' per NM to 3700, or alternatively, w/ std. takeoff minimums and a normal 200'/NM climb gradient, takeoff must occur no later than 1300' prior to departure end of runway.

NOTE: **Rwy 5**, fence post 320' from departure end of runway, 162' right of centerline, 12' AGL/3455' MSL, truck on road beginning 515' from departure end of runway, 632' right of centerline, 17' AGL/3498' MSL, tree 1 NM from departure end of runway, 1242' left of centerline, 75' AGL/3604' MSL. **Rwy 11**, truck on road 906' from departure end of runway, 691' left of centerline, 17' AGL/3456' MSL, tree 1697' from departure end of runway, 26' right of centerline, 75' AGL/3495' MSL, tree 1561' from departure end of runway, 322' left of centerline, 75' AGL/3514' MSL, light standard 852' from departure end of runway, 174' left of centerline, 22' AGL/3451' MSL.

SHELTON, WA

SANDERSON FIELD

TAKE-OFF MINIMUMS: **Rwy 5**, std. w/ a min. climb of 312' per NM to 4000, or 1500-2½ for a climb in visual conditions. **Rwy 23**, std. w/ a min. climb of 414' per NM to 4000, or 1500-2½ for a climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 5**, climbing right turn to intercept SEA R-230 to CARRO intersection. Or for climb in visual conditions: Cross Sanderson Field northeast bound at or above 1600, thence via SEA R-230 to cross CARRO intersection at or above 4000. **Rwy 23**, climbing left turn to intercept SEA R-230 to CARRO intersection. Or for climb in visual conditions: Cross Sanderson Field northeast bound at or above 1600, thence via SEA R-230 to cross CARRO intersection at or above 4000.

NOTE: **Rwy 5**, multiple trees beginning 550' from departure end of runway, 107' left of centerline, up to 94' AGL/366' MSL. Multiple trees beginning 130' from departure end of runway, 70' right of centerline, up to 80' AGL/352' MSL. **Rwy 23**, multiple trees beginning 52' from departure end of runway, 149' left of centerline, up to 72' AGL/330' MSL. Multiple trees beginning 886' from departure end of runway, 153' right of centerline, up to 155' AGL/486' MSL.

SHERIDAN, WY**SHERIDAN COUNTY**

TAKE-OFF MINIMUMS: **Rwy 5**, 700-3 or std. w/ min. climb of 318' per NM to 5100, or... **Rwy 14**, 800-3 or std. w/ min. climb of 263' per NM to 5100, or... **Rwy 23**, 900-3 or std. w/ min. climb of 348' per NM to 5100, or...
... 1400/3 for climb in visual conditions. Climb in visual conditions NA at night.

DEPARTURE PROCEDURE: **Rwy 5**, climbing left turn via SHR R-106 to SHR VORTAC, or climb in visual conditions to cross Sheridan County Airport northwestbound at or above 5300, then via SHR R-126 to SHR VORTAC, thence... **Rwy 14**, climbing left turn via heading 320° and SHR R-106 to SHR VORTAC, or climb in visual conditions to cross Sheridan County Airport northwestbound at or above 5300, then via SHR R-126 to SHR VORTAC, thence... **Rwy 23**, climbing right turn via SHR R-153 to SHR VORTAC, or climb in visual conditions to cross Sheridan County Airport northwestbound at or above 5300, then via SHR R-126 to SHR VORTAC, thence... **Rwy 32**, climb via heading 320° and SHR R-106 to SHR VORTAC, thence...
... climb in holding pattern (hold northwest, left turn, 133° inbound) to cross SHR VORTAC at or above airway MEA for route of flight.

NOTE: **Rwy 5**, multiple trees beginning 101' from departure end of runway, 188' left of centerline, up to 80' AGL/3991' MSL. **Rwy 23**, fence 1201' from departure end of runway, 10' left of centerline, 20' AGL/4060' MSL. Building 1949' from departure end of runway, 415' left of centerline, 17' AGL/4077' MSL. Tree 3337' from departure end of runway, 391' right of centerline, 43' AGL/4143' MSL. **Rwy 32**, antenna 53' from departure end of runway, 398' right of centerline, 20' AGL/4020' MSL.

SIDNEY, MT**SIDNEY-RICHLAND MUNI**

TAKE-OFF MINIMUMS: **Rwy 28**, 400-2 or std. with a min. climb of 260' per NM to 2300.

SNOHOMISH, WA**HARVEY FIELD (S43)****ORIG 09127 (FAA)**

TAKE-OFF MINIMUMS: **Rwys 15R, 33L**, NA-obstacles. **Rwy 15L**, std. w/ min. climb of 353' per NM to 1100, or 1200-2½ for climb in visual conditions. **Rwy 33R**, std. w/ min. climb of 475' per NM to 800, or 1200-2½ for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 15L**, climbing right turn on 344° course to WATON LOM, or for climb in visual conditions, cross Harvey Field at or above 1100 then proceed on 329° course to WATON LOM, thence... **Rwy 33R**, climb on 329° course to WATON LOM, or for climb in visual conditions, cross Harvey Field at or above 1100 then proceed on 329° course to WATON LOM, thence...

... aircraft departing WATON LOM on bearings 150° CW 340° from WATON LOM climb on course. Aircraft departing WATON LOM on bearings 340° CW 150° from WATON LOM, climb in holding pattern (South, left turns, 339° inbound) to cross WATON LOM at or above 4500 before proceeding on course.

NOTE: **Rwy 15L**, tree 81' from DER, 177' right of centerline, 40' AGL/106' MSL. Trees 685' from DER, left and right of centerline, up to 48' AGL/70' MSL. **Rwy 33R**, powerline 139' from DER, 226' left of centerline, 40' AGL/56' MSL. Tree 298' from DER, 205' right of centerline, 104' AGL/121' MSL. Tower 5708' from DER, 1956' right of centerline, 206' AGL/300' MSL.

SPOKANE, WA

FELTS FIELD (SFF)

AMDT 5 10098 (FAA)

TAKE-OFF MINIMUMS: **Rwy 3L**, std. w/ min. climb of 450' per NM to 3600, or 2300-3 for climb in visual conditions. **Rwy 3R**, std. w/ min. climb of 410' per NM to 3700, or 2300-3 for climb in visual conditions. **Rwy 21L**, std. w/ min. climb of 375' per NM to 3200, or 2300-3 for climb in visual conditions. **Rwy 21R**, std. w/ min. climb of 375' per NM to 3200, or 2300-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwys 3L, 3R**, climb heading 035° to 3600, then climbing right turn heading 210° and GEG R-050 to GEG VORTAC, or for climb in visual conditions: cross Felts Field Airport at or above 4100, then via heading 165° and GEG R-050 to GEG VORTAC. Cross GEG VORTAC at or above MCA/MEA for route of flight. **Rwys 21L, 21R**, climb heading 215° to 3200, then climbing left turn heading 190° and GEG R-050 to GEG VORTAC, or for climb in visual conditions: cross Felts Field Airport at or above 4100, then via heading 165° and GEG R-050 to GEG VORTAC. Cross GEG VORTAC at or above the MCA/MEA for route of flight.

NOTE: **Rwy 3L**, trees beginning 1853' from DER, 772' right of centerline, up to 100' AGL/2037' MSL. Trees beginning 3538' from DER, 529' left of centerline, up to 100' AGL/2339' MSL. Antenna, trees and transmission poles beginning 1.5 NM from DER, 16' left of centerline, up to 100' AGL/2579' MSL. Trees beginning 2.3 NM from DER, 723' right of centerline, up to 100' AGL/2499' MSL. **Rwy 3R**, hangar, NDB, and trees beginning 92' from DER, 269' right of centerline, up to 100' AGL/2040' MSL. Trees beginning 4685' from DER, 1033' left of centerline, up to 100' AGL/2339' MSL. Antenna, trees and transmission poles beginning 1.6 NM from DER, 525' left of centerline, up to 100' AGL/2559' MSL. Trees and transmission poles beginning 2.6 NM from DER, 214' right of centerline, up to 150' AGL/2570' MSL. **Rwy 21L**, elevator, pole on building and trees beginning 315' from DER, 302' left of centerline, up to 140' AGL/2080' MSL. **Rwy 21R**, poles and trees beginning 188' from DER, 13' right of centerline, up to 100' AGL/1982' MSL. Elevator, pole, hangar, and building beginning 203' from DER, 1' left of centerline, up to 140' AGL/2080' MSL. Terrain and trees beginning 3.1 NM from DER, 4904' left of centerline, up to 100' AGL/2559' MSL.

SPOKANE INTL

DEPARTURE PROCEDURE: **All aircraft** climb direct GEG VORTAC. Continue climb via R-208 within 10 miles to cross GEG VORTAC at or above: northeastbound V120-448, 5200; eastbound V2, 5200, southeast thru westbound climb on course.

STEVENSVILLE, MT

STEVENSVILLE

TAKE-OFF MINIMUMS: **Rwy 12**, do not exceed 210 knots until established on MSOR-163. **Rwy 30**, do not exceed 210 knots until established on MSO R-160.

DEPARTURE PROCEDURE: **Rwy 12**, climbing right turn via heading 335 and MSO R-163 to MSO VOR/DME climb in MSO VOR/DME holding pattern (southeast, right turn, 340° inbound) to 13000' before proceeding on course. **Rwy 30**, climbing right turn via heading 025° and MSO R-160 to MSO VOR/DME Climb in MSO VOR/DME holding pattern (southeast, right turn, 340° inbound) to 13000' before proceeding on course.

SUNRIVER, OR

SUNRIVER

TAKE-OFF MINIMUMS: **Rwy 18**, 300-1 or std. with a min. climb of 360' per NM to 4400. **Rwy 36**, 600-2 or std. with a min. climb of 240' per NM to 4900.

DEPARTURE PROCEDURE: **Rwy 18**, climb runway heading to 7000 then climbing left turn direct DSD VORTAC. **Rwy 36**, climb direct to DSD VORTAC. Then **all aircraft** climb on course.

TACOMA, WA

TACOMA NARROWS

TAKE-OFF MINIMUMS: **Rwy 35**, 400-1 or std. with a min. climb of 210' per NM to 400'.

DEPARTURE PROCEDURE: **Rwy 17**, turn right, climb via heading 230° to intercept OLM R-009 then direct OLM VORTAC. **Rwy 35**, turn left, climb via heading 270° to intercept SEA R-230 then direct CARRO INT. Continue climb in holding (SW, right turns, 047° inbound) to MEA or assigned altitude for route of flight.

THE DALLES, OR

COLUMBIA GORGE RGNL/THE DALLES MUNI

TAKE-OFF MINIMUMS: **Rwy 2**, CAT A, B 1100-2 or std. with a min. climb of 350' per NM to 1500. CAT C, D 2600-3 or std. with a min. climb of 475' per NM to 3100. **Rwy 7**, 900-3 or std. with a min. climb of 330' per NM to 1200. **Rwy 12**, 1400-3 or std. with a min. climb of 500' per NM to 2000. **Rwy 20**, 1800-3 or std. with a min. climb of 470' per NM to 2200. **Rwy 25**, NA. **Rwy 30**, 2900-3 or std. with a min. climb of 500' per NM to 2700.

DEPARTURE PROCEDURE: **Rwys 2, 7**, climbing right turn heading 120°. **Rwy 12**, climb via runway heading. **Rwys 20, 30**, climbing left turn heading 120°. **All aircraft** intercept and climb southbound via LTJ R-165 to 3500. Then climbing left turn direct LTJ VORTAC. Continue climb in LTJ holding pattern (E, right turns, 260° inbound) to cross LTJ VORTAC at or above MCA or MEA for route of flight.

TILLAMOOK, OR

TILLAMOOK

TAKE-OFF MINIMUMS: **Rwys 1, 13, 19**, NA. **Rwy 31**, 2000-3 or std. with a min. climb of 350' per NM to 4500. DEPARTURE PROCEDURE: **Rwys 1, 13, 19**, NA. **Rwy 31**, use FETUJ RNAV DEPARTURE.

TORRINGTON, WY

TORRINGTON MUNI (TOR)

ORIG 10042 (FAA)

NOTE: **Rwy 2**, terrain 30' from DER, 277' left of centerline, 4197' MSL. **Rwy 10**, multiple trees and fence beginning 71' from DER, 143' right of centerline, up to 14' AGL/4214' MSL. Terrain 14' from DER, 502' left of centerline, 4199' MSL. **Rwy 28**, terrain 133' from DER, 386' right of centerline, 4213' MSL.

TWIN FALLS, ID

JOSLIN FIELD-MAGIC VALLEY RGNL

TAKE-OFF MINIMUMS: **Rwy 12**, NA.

DEPARTURE PROCEDURE: Aircraft departing on TWR R-240 CW R-080 climb on course. All others climb runway heading 6000 then climbing turn direct TWF VORTAC. Climb in holding pattern (NW, right turns, 113° inbound) to MCA or MEA as appropriate for direction of flight.

VANCOUVER, WA

PEARSON FIELD (VUO)

AMDT 2 07354 (FAA)

TAKE-OFF MINIMUMS: **Rwy 8**, std. w/ min. climb of 358' per NM to 600, or 500-3 w/ min. climb of 201' per NM to 600, or 900-2½ for climb in visual conditions.

Rwy 26, 600-3 or 900-2½ for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 8**, climb heading 079° to 500 then climbing left turn direct BTG VORTAC, thence... or for climb in visual conditions: cross Pearson Field at or above 800 MSL then proceed on BTG VORTAC R-179 to BTG VORTAC, thence...

Rwy 26, climb heading 259° to 700 then climbing right turn direct BTG VORTAC, thence... or for climb in visual conditions: cross Pearson Field at or above 800 MSL then proceed on BTG VORTAC R-179 to BTG VORTAC, thence...

...continue climb in BTG VORTAC holding pattern (hold northwest, right turn, 149° inbound) to cross BTG VORTAC at or above MEA/MCA for route of flight.

NOTE: **Rwy 8**, tree 1.4 NM from departure end of runway, 1283' left of centerline, 100' AGL/395' MSL. Tree 1.7 NM from departure end of runway, 701' left of centerline, 100' AGL/401' MSL. Tree 2 NM from departure end of runway, 849' left of centerline, 100' AGL/406' MSL. Tree 2.4 NM from departure end of runway, 648' left of centerline, 100' AGL/399' MSL. **Rwy 26**, bridge 2704' from departure end of runway, 587' left of centerline, 243' AGL/245' MSL. Crane 1.5 NM from departure end of runway, 2563' right of centerline, 237' AGL/267' MSL. Transmission line tower 2.5 NM from departure end of runway, 2036' right of centerline, 516' AGL/534' MSL.

WALLA WALLA, WA

WALLA WALLA RGNL

DEPARTURE PROCEDURE: **Rwys 2,7,20,25,34**, turn left. **Rwy 16**, turn right. All aircraft climb to 2500 via ALW VOR/DME R-195, then climbing right turn direct ALW VOR/DME to cross ALW VOR/DME at or above MEA or MCA for route of flight.

NOTE: **Rwy 16**, antenna 365' from departure end of runway, 97' right of centerline, 1155' MSL. Terrain 1' from departure end of runway 140' left of centerline, 1145' MSL. **Rwy 20**, light 666' from departure end of runway, 640' left of centerline, 1170' MSL. **Rwy 34**, terrain 213' from departure end of runway, 230' right of centerline, 1130' MSL.

WEISER, ID

WEISER MUNI (S87)

ORIG 08269 (FAA)

TAKE-OFF MINIMUMS: **Rwy 12**, std. w/ min. climb of 310' per NM to 3900 or 2400-3 for climb in visual conditions. **Rwy 30**, std. w/ min. climb of 360' per NM to 4000 or 2400-3 for climb in visual conditions.

DEPARTURE PROCEDURE: **Rwy 12**, climb heading 121° to 3900 before proceeding on course. **Rwy 30**, climb heading 301° to 4000 before proceeding on course... for climb in visual conditions: cross Weiser Muni airport at or above 4400 before proceeding on course.

NOTE: **Rwy 12**, tree 248' from departure end of runway, 443' right of centerline, 100' AGL/2184' MSL. **Rwy 30**, tree 1907' from departure end of runway, 769' right of centerline, 100' AGL/2174' MSL.

WENATCHEE, WA

PANGBORN MEMORIAL

TAKE-OFF MINIMUMS: **Rwy 7**, NA. **Rwy 12**, 1500-2 or std. with a min. climb of 510' per NM to 2900.

Rwys 25, 30, CAT A, B 1600-2 or std. with a min. climb of 360' per NM to 3100. CAT C, D 5500-3 or std. with a min. climb of 570' per NM to 7200.

DEPARTURE PROCEDURE: **Rwy 12**, climb runway heading. **Rwys 25, 30**, climbing left turn. All aircraft climb via EAT R-113 to 4000 then climbing left turn direct EAT VOR/DME. Aircraft departing EAT R-010 CW R-140 climb on course. All others continue climb in EAT VOR/DME holding pattern (E, right turns, 253° inbound) to cross EAT VOR/DME at or above: R-141 CW R-2007400; R-201 CW R-009, 8200.

WEST YELLOWSTONE, MT

YELLOWSTONE

TAKE-OFF MINIMUMS: **Rwy 19**, 2200-2 or std. with a min. climb of 245' per NM to 8900. FAR 135 AUTH: **Rwy 1**, ½ mile.

DEPARTURE PROCEDURE: **Rwy 1**, turn right. All aircraft climb direct TARGY LOM. Aircraft departing TARGY LOM on bearing 190° CW 220° climb on course. All others climb south on bearing 190° within 10 NM of TARGY LOM turn left and continue climbing direct TARGY LOM to cross TARGY LOM at or above: bearing 360° CW 190° 9300, bearing 220° CW 360° 10500

WHEATLAND, WY**PHIFER AIRFIELD**

DEPARTURE PROCEDURE: **Rwy 8**, climbing left turn to 9000 via heading 030° to intercept IIP VOR/DME R-140 to JEZZY Int, thence. . . **Rwy 26**, climbing right turn to 9000 via heading 360° and GYZ NDB course 051° to JEZZY INT, thence. . .

. . . continue climb-in-hold (hold northwest, right turn, 140° inbound) to 9000 before proceeding on course.

NOTE: **Rwy 8**, multiple trees 512' from departure end of runway, 584' left of centerline, 100' AGL/4859' MSL.

Rwy 26, multiple trees, buildings, poles/lights, siren, roads w/ vehicles beginning 2' from departure end of runway, on centerline, to 488' left of centerline, 100' AGL/4899' MSL. Multiple trees, buildings, poles/lights, roads w/ vehicles beginning 2' from departure end of runway, on centerline to 499' right of centerline, 100' AGL/4859' MSL.

WHIDBEY ISLAND NAS (AULT FIELD)**(NUW)**

OAK HARBOR, WA. 07186

Diverse departures not authorized.

MILITARY DEPARTURE PROCEDURE: **Rwy 7**:

Minimum climb of 430'/NM until 600. Climbing left turn to 2000, intercept NUWR-067, expect radar vectors to join assigned route. **Rwy 14**: Climbing left turn to 2000, intercept NUWR-128, expect radar vectors to join assigned route. **Rwy 25**: Climb to 2000 via heading 249°, expect radar vectors to join assigned route. **Rwy 32**: Climb to 2000 via heading 317°, expect radar vectors to join assigned route. **ALL RWYS**: If vectors are not received by 10 DME of NUW TACAN, climb to 3000, intercept the NUW 11 DME ARC to join assigned route. CIVIL DEPARTURE PROCEDURE:

Rwy 7: Minimum climb of 270'/NM until 700. Climbing left turn to 2000 via heading 067°, expect radar vectors to join assigned route. **Rwy 14**: Climbing left turn to 2000, via heading 128°, expect radar vectors to join assigned route. **Rwy 25**: Use published DP or climb to 2000 via heading 249°, expect radar vectors to join assigned route. **Rwy 32**: Climb to 2000 via heading 317°, expect radar vectors to join assigned route. **ALL RWYS**: If vectors are not received by 10 DME of NUW TACAN, climb to 3000, proceed direct CVV VOR/DME to join assigned route. TAKEOFF OBSTACLES: **Rwy 7**: Terrain, 7813' from DER, 2469' left of centerline, 276' MSL. Trees, 4274' from DER, 5472' left of centerline, 472' MSL. Trees, 5239' from DER, 6257' left of centerline, 495' MSL. Trees, 8561' from DER, 3685' left of centerline, 426' MSL. Trees, 12,561' from DER, 4814' right of centerline, 462' MSL. Terrain, 11,843' from DER, 7129' left of centerline, 502' MSL. Trees, 15,361' from DER, 4015' right of centerline, 521' MSL.

WORLAND, WY**WORLAND MUNI**

TAKE-OFF MINIMUMS: **Rwys 4, 10, 22, 28**, NA.

Rwy 16, 300-2 or std. with a min. climb of 230' per NM to 4600.

DEPARTURE PROCEDURE: **All aircraft** climb to 5000, then direct RLY VOR/DME. Aircraft departing RLY R-061 CWR-349 climb on course. All others continue climb in RLY VOR/DME holding pattern (N, right turns, 159° inbound) to cross RLY VOR/DME at or above 7000.


YAKIMA, WA**YAKIMA AIR TERMINAL/MCALLISTER FIELD**

TAKE-OFF MINIMUMS: **Rwy 4**, NA. **Rwy 9**, 800-4 or std. with a min. climb of 300' per NM to 5000. **Rwys 22, 27**, 2500-3 or std. with a min. climb of 300' per NM to 5200.

DEPARTURE PROCEDURE: **Rwy 4**, NA. **Rwys 9, 22, 27**, Use ZILLA DEPARTURE PROCEDURE.

AFTON TWO DEPARTURE (RNAV) (OBSTACLE)

SALT LAKE CENTER
128.35 381.6
CASPER RADIO
122.3
CTAF 122.8

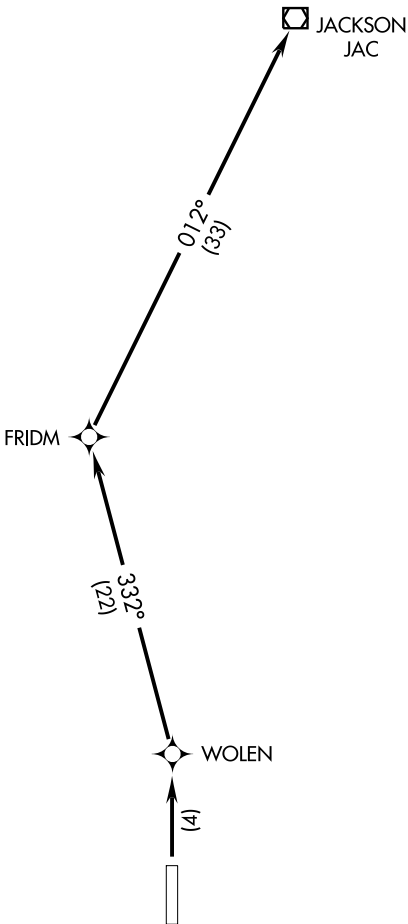

NOTE: Chart not to scale.
NOTE: 1. GPS Required.
2. RNAV 1

TAKE-OFF MINIMUMS

Rwy 34: Standard with minimum climb of 330 feet per NM to 10700.
Rwy 16: NA- Obstacles.

TAKE-OFF OBSTACLE NOTES

Rwy 34: Tree 1054 feet from DER, 605 feet right of centerline, 40' AGL/6241' MSL.
Tree 1703 feet from DER, 235 feet right of centerline, 40' AGL/6259' MSL.




DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 34: Climb to 13000 direct WOLEN, and via 332° track to FRIDM, then via 012° track to JAC VOR/DME.

LUNDI TWO DEPARTURE (RNAV) (OBSTACLE)

SALT LAKE CENTER
128.35 381.6
CASPER RADIO
122.3
CTAF 122.8

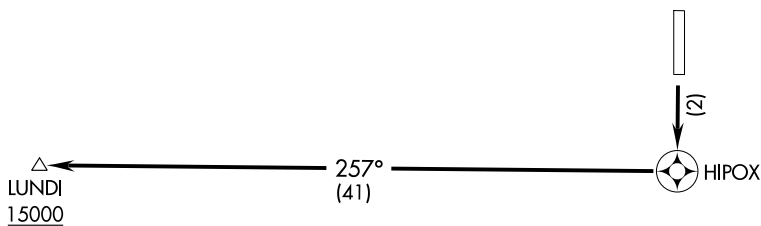

TAKE-OFF MINIMUMS

Rwy 16: Standard with minimum climb of 515 feet per NM to 10400.
Rwy 34: NA- obstacles.

TAKE-OFF OBSTACLE NOTES

Rwy 16: Tree 1807 feet from DER, 298 feet right of centerline, 40' AGL/6277' MSL.

- NOTE: 1. GPS Required.
2. RNAV 1

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 16: Climb to 15000 direct HIPOX and right turn via 257° track to LUNDI.

RNAV (GPS) RWY 16



AFTON MUNI (AFO)

APP CRS 156°	Rwy Idg 7025
	TDZE 6188
	Apt Elev 6221



▽ DME/DME RNP -0.3 NA.
△ NA If local altimeter setting not received, procedure NA.
 Circling NA east of Rwy 16-34.

MISSED APPROACH: Climbing right turn to 11700 direct GIGSE and hold. When authorized by ATC, climb-in-hold to 15000.

AWOS-3 119.025	SALT LAKE CENTER 128.35 381.6	CASPER RADIO 122.3	UNICOM 122.8 (CTAF)
--------------------------	---	------------------------------	-------------------------------

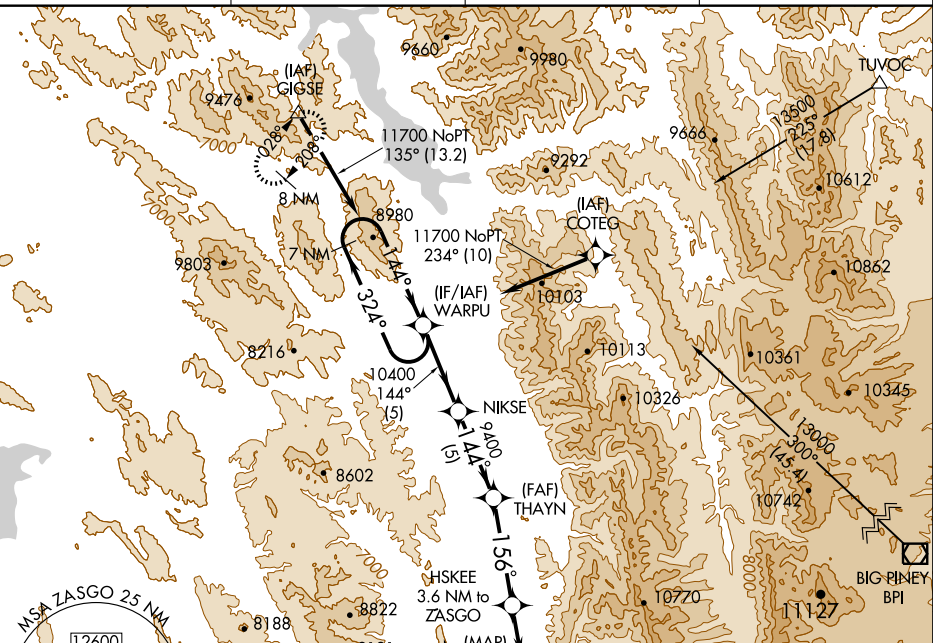

ELEV 6221

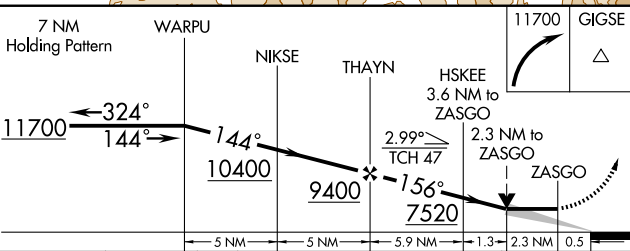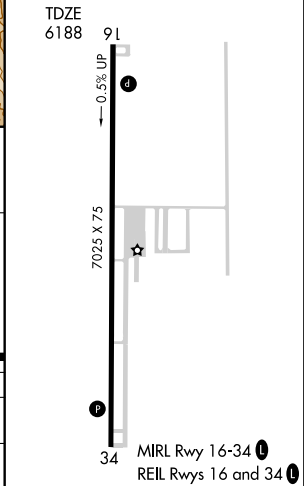

CATEGORY	A	B	C	D
RNAV MDA	7140-1¼ 952 (1000-1¼)	7140-1½ 952 (1000-1½)	7140-3 952 (1000-3)	NA
CIRCLING	7140-1¼ 919 (1000-1¼)	7140-1½ 919 (1000-1½)	7140-3 919 (1000-3)	NA

RNAV (GPS) RWY 34

AFTON MUNI (AFO)




APP CRS 346°	Rwy Idg 7025
	TDZE 6221
	Apt Elev 6221

NA DME/DME RNP-0.3 NA.
Circling NA east of Rwy 16-34
Visibility reduction by helicopters NA.
If local altimeter setting not received, procedure NA.

MISSED APPROACH: Climbing left turn to 11500 direct IVAYU and hold.

AWOS-3 119.025	SALT LAKE CENTER 128.35 381.6	CASPER RADIO 122.3	UNICOM 122.8 (CTAF)
--------------------------	---	------------------------------	-------------------------------

Procedure NA for arrivals at MLD VOR/DME via V465 southwest bound and via V142 west bound.

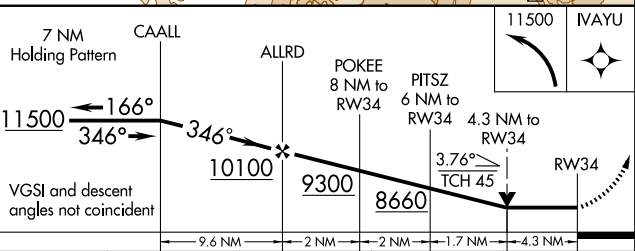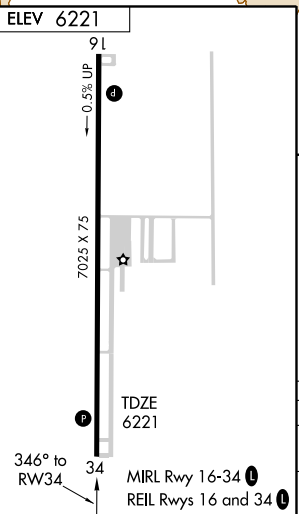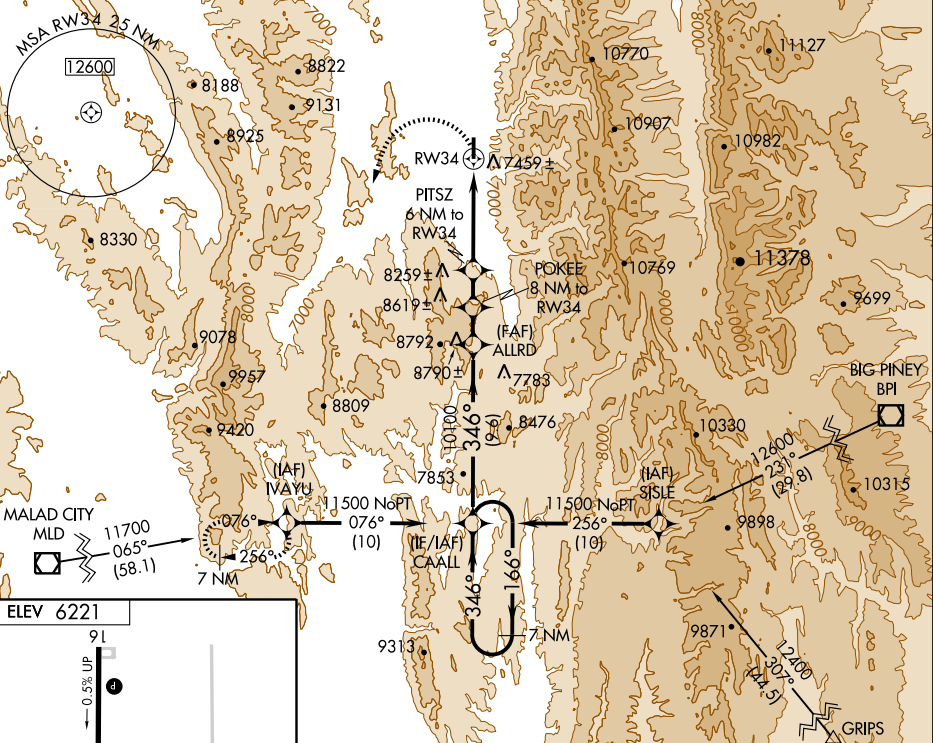





CATEGORY	A	B	C	D
LNVA MDA	7620-1¼ 1399 (1400-1¼)	7620-1½ 1399 (1400-1½)	7620-3 1399 (1400-3)	NA
CIRCLING	7620-1¼ 1399 (1400-1¼)	7620-1½ 1399 (1400-1½)	7620-3 1399 (1400-3)	NA

APP CRS 312°	Rwy Idg 6803
	TDZE 6965
	Apt Elev 6990

NA

MISSED APPROACH: Climbing right turn to 9000 direct JITJU and hold.

ASOS 135.225	CASPER RADIO 122.3	UNICOM 122.8 (CTAF)	122.7
------------------------	------------------------------	-------------------------------	--------------

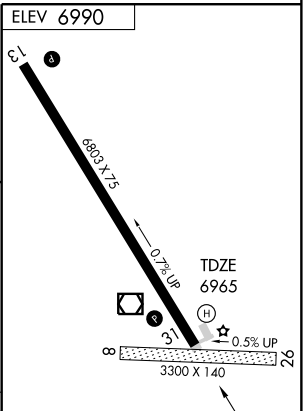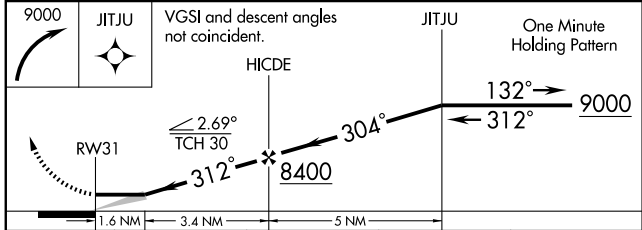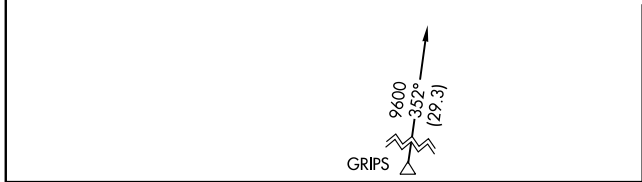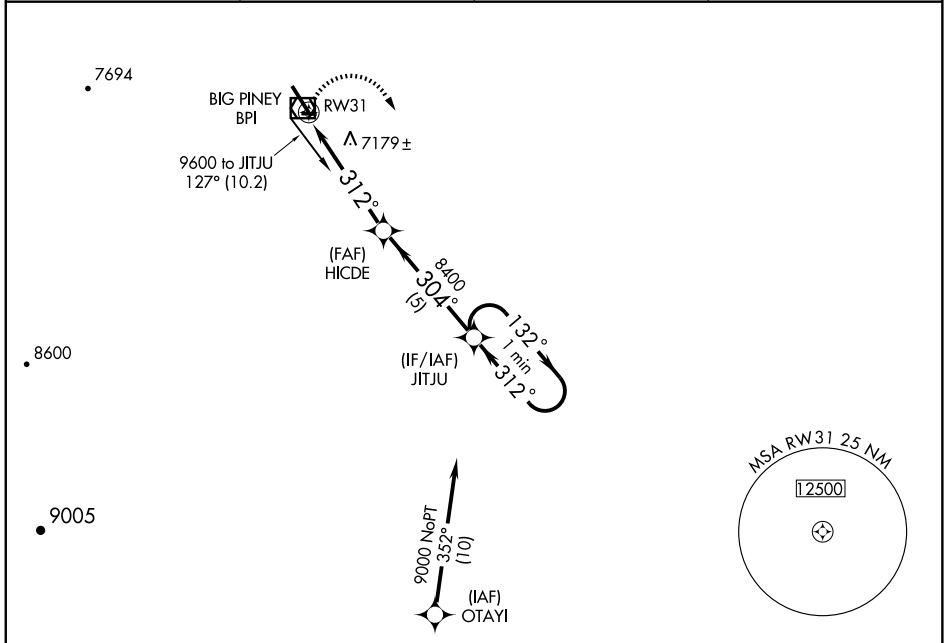

CATEGORY	A	B	C	D
S-31	7440-1 475 (500-1)	7440-1½ 475 (500-1¼)	7440-1½ 475 (500-1½)	7440-1½ 475 (500-1½)
CIRCLING	7460-1 470 (500-1)	7560-1 570 (600-1)	7560-1½ 570 (600-1½)	7560-2 570 (600-2)

MIRL Rwy 13-31 **1**





REIL Rwy 13 and 31 **1**

NW-1, 08 APR 2010 to 06 MAY 2010

VOR/DME BPI 116.5 Chan 112	APP CRS 298°	Rwy Idg TDZE Apt Elev	6803 6965 6990
--	------------------------	-----------------------------	---

MISSED APPROACH: Climbing right turn to 10000 on BPI R-118, then return to BPI VOR/DME and hold.

ASOS 135.225	CASPER RADIO 122.3	UNICOM 122.8 (CTAF)	122.7
------------------------	------------------------------	-------------------------------	--------------

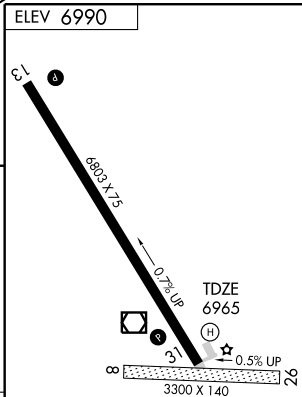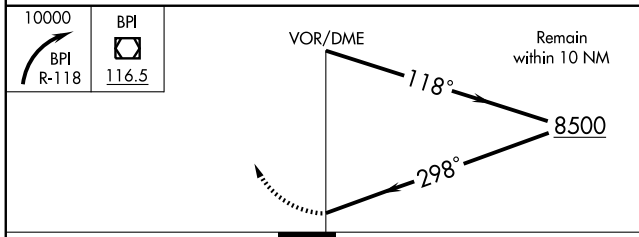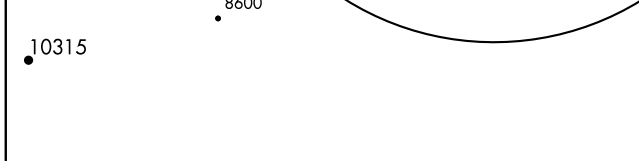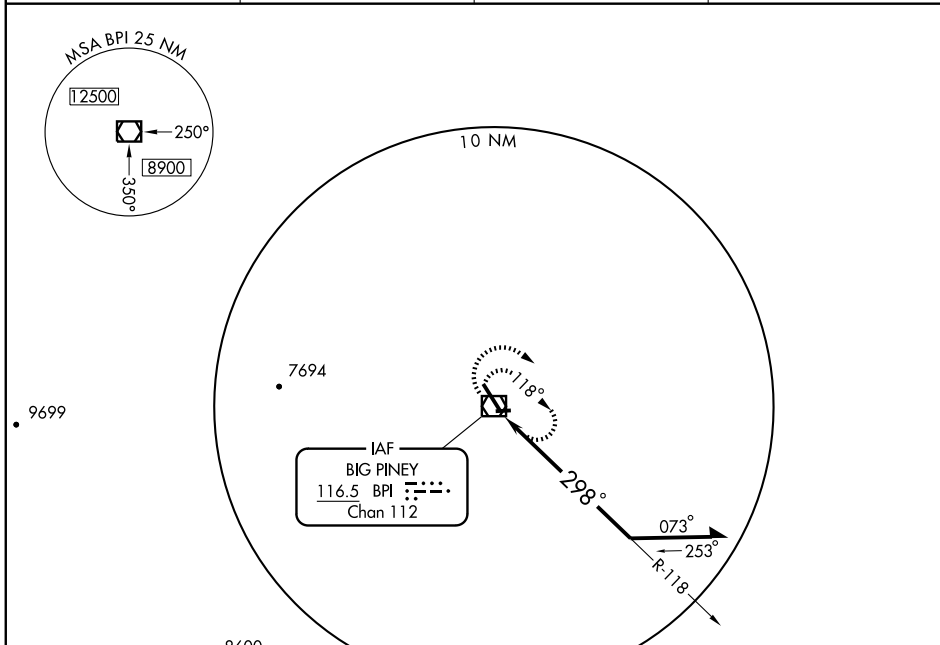

CATEGORY	A	B	C	D
S-31	7680-1	715 (700-1)	7680-2 715 (700-2)	7680-2½ 715 (700-2¼)
CIRCLING	7680-1	690 (700-1)	7680-2 690 (700-2)	7680-2½ 690 (700-2¼)

MIRL Rwy 13-31
REIL Rws 13 and 31

RNAV (GPS) RWY 31



BUFFALO/JOHNSON COUNTY (BYG)

APP CRS **306°**
 Rwy Idg **6143**
 TDZE **4937**
 Apt Elev **4968**



Visibility reduction by helicopters NA. If local altimeter setting not received, use Sheridan altimeter setting and increase all MDAs 600 feet. DME/DME RNP- 0.3 NA. Procedure NA at night.

MISSED APPROACH: Climbing right turn to 7400 direct ONECI and hold.

ASOS **135.425** CASPER RADIO **122.025** UNICOM **122.8 (CTAF)**

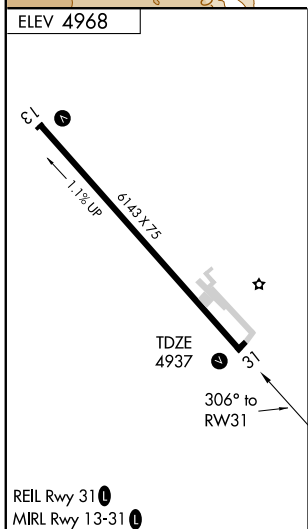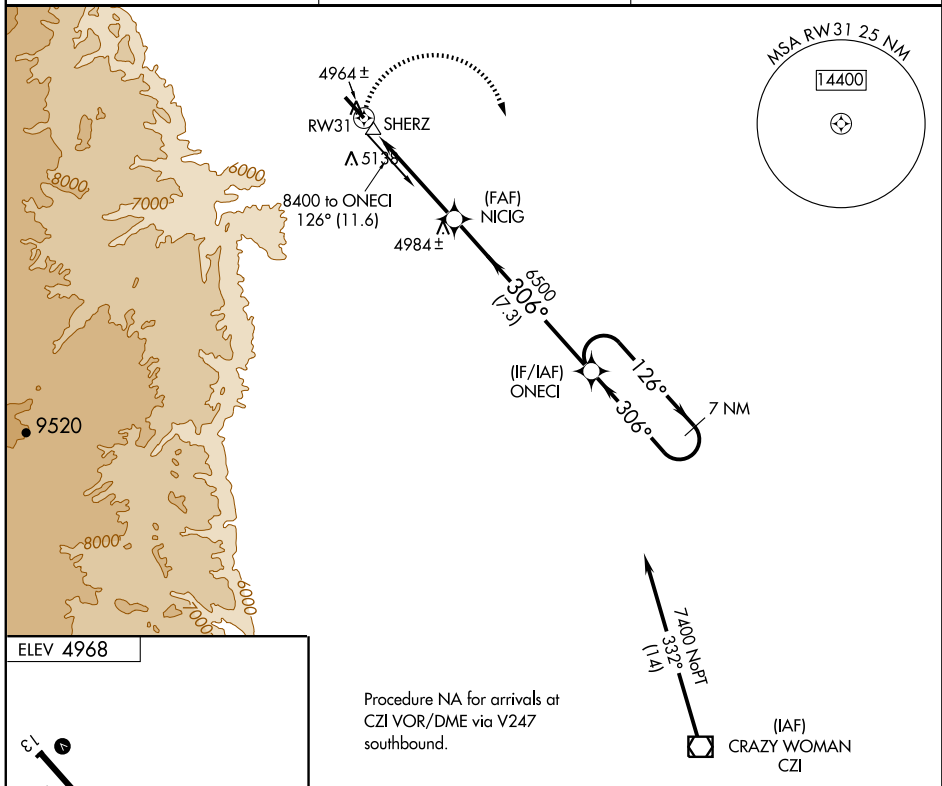

Procedure NA for arrivals at CZI VOR/DME via V247 southbound.

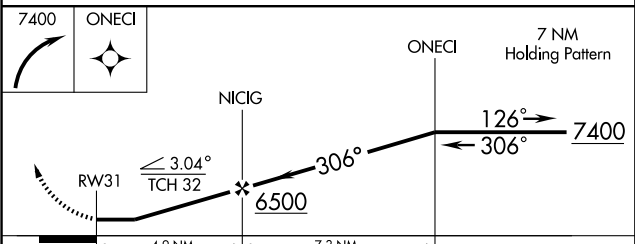

CATEGORY	A	B	C	D
LNAV MDA	5340-1	403 (400-1)	5340-1¼	403 (400-1¼)
CIRCLING	5440-1 472 (500-1)	5520-1 552 (600-1)	5540-1½ 572 (600-1½)	5660-2¼ 692 (700-2¼)

VOR/DME RWY 31



BUFFALO/JOHNSON COUNTY (BYG)

VOR/DME CZI 117.3 Chan 120	APP CRS 319°	Rwy Idg TDZE Apt Elev 6143 4937 4968
--	------------------------	---


MISSED APPROACH: Climbing right turn to 7600 via heading 160° and CZI VOR/DME R-319 to MIZNR/14 DME and hold.

Visibility reduction by helicopters NA. If local altimeter setting not received, use Sheridan altimeter setting and increase all MDAs 600 feet. When VGSI inoperative, procedure NA at night.

ASOS 135.425	CASPER RADIO 122.025	UNICOM 122.8 (CTAF)
------------------------	--------------------------------	-------------------------------

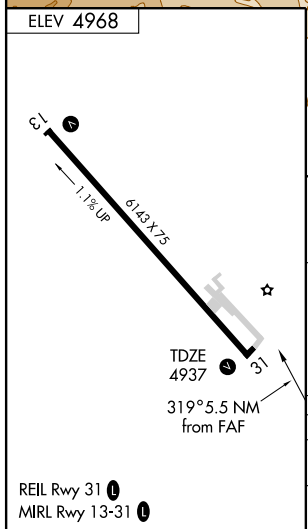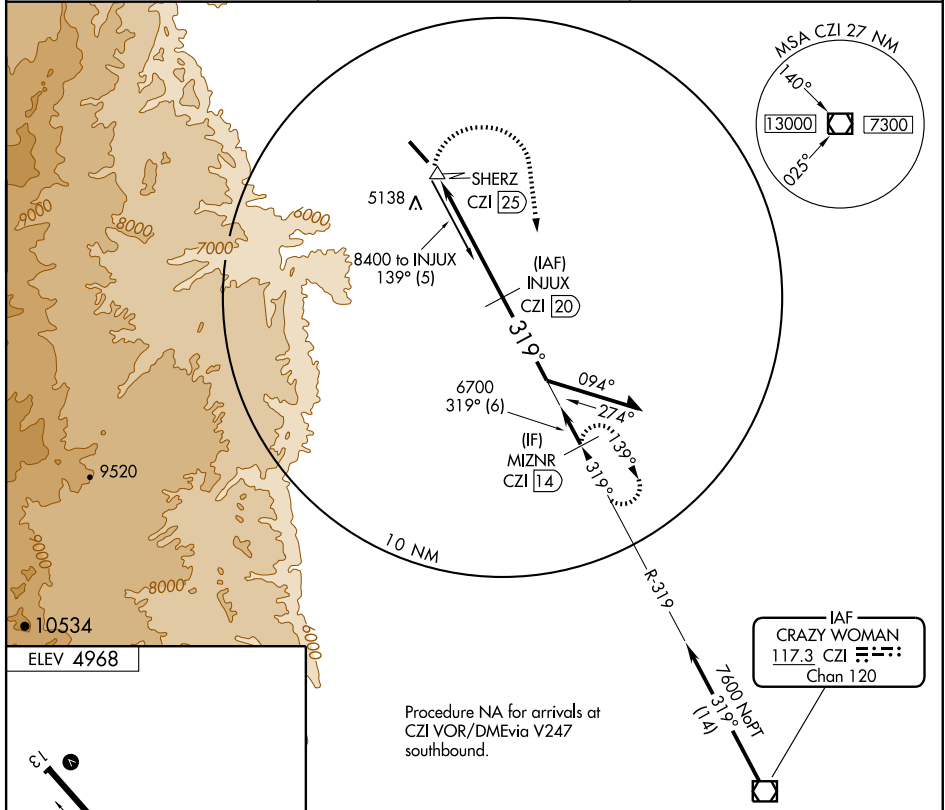

Procedure NA for arrivals at CZI VOR/DME via V247 southbound.

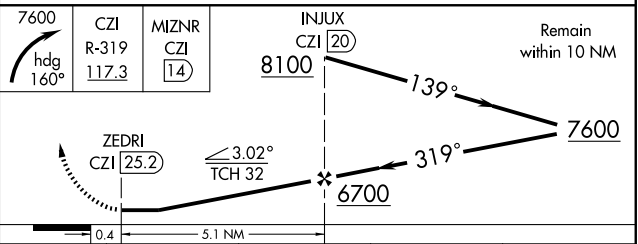

CATEGORY	A	B	C	D
S-31	5680-1 743 (800-1)	5680-1½ 743 (800-1½)	5680-2¼ 743 (800-2¼)	5680-2½ 743 (800-2½)
CIRCLING	5680-1 712 (800-1)	5680-1½ 712 (800-1½)	5680-2¼ 712 (800-2¼)	5680-2½ 712 (800-2½)

AIRPORT DIAGRAM

AL-72 (FAA)


CASPER/NATRONA COUNTY INTL (CPR)
CASPER, WYOMING

ATIS
 126.15
 CASPER TOWER*
 118.3 257.8
 GND CON
 121.9
 CLNC DEL
 121.9 257.8

D

FIELD
 ELEV
 5350

JANUARY 2005
 ANNUAL RATE OF CHANGE
 0.1° W
 VAR 10.9° E

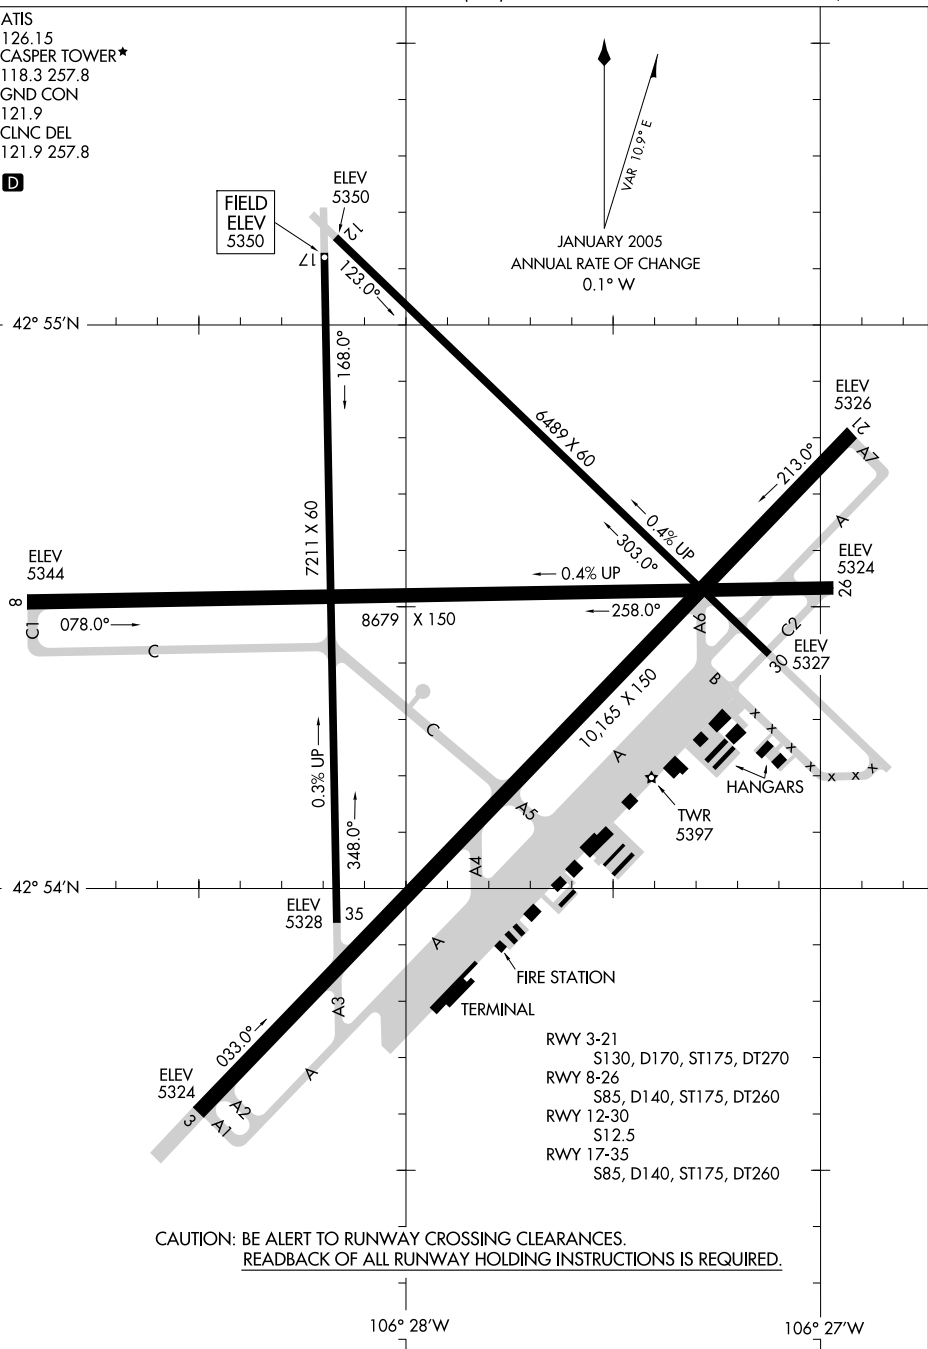

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
 READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.

NW-1. 08 APR 2010 to 06 MAY 2010

106° 28'W

106° 27'W

42° 54'N

42° 55'N

ALCOS3.ALCOS 10042

ALCOS THREE DEPARTURE


SL-72 (FAA)

CASPER/NATRONA COUNTY INTL (CPR)
CASPER, WYOMING

ATIS 126.15
CLNC DEL
121.9 257.8
GND CON
121.9 257.8
CASPER TOWER *
118.3 (CTAF) 257.8 (1300-0500Z)
CASPER DEP CON *
120.65 354.1 (1300-0500Z)
DENVER CENTER
135.6 363.025 (0500-1300Z)

NOTE: DME required.

NOTE: This SID requires a minimum climb of 270' per NM to 7300' (675 FPM at 150K, 900 FPM at 200K, 1125 FPM at 250K)

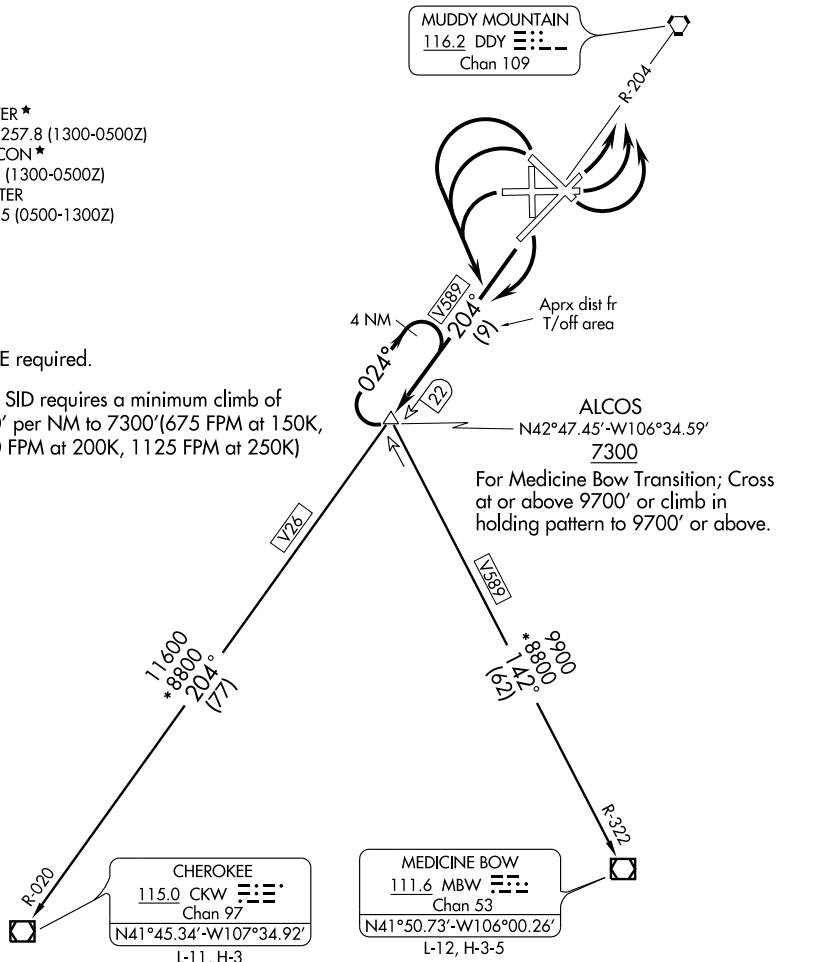

NW-1, 08 APR 2010 to 06 MAY 2010

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 17: Turn right, thence. . . .

ALL OTHER RUNWAYS: Turn left, thence. . . .

. . . .climb via DDY R-204 to cross ALCOS INT at or above 7300', then via (transition) or (assigned route).

CHEROKEE TRANSITION (ALCOS3.CKW): Via DDY R-204 and V26 to CKW VOR/DME.

MEDICINE BOW TRANSITION (ALCOS3.MBW): Via MBW R-322 to MBW VOR/DME.
Cross ALCOS INT at or above 9700' or climb in holding pattern to 9700' or above.

ATIS 126.15
 CLNC DEL
 121.9 257.8
 GND CON
 121.9 257.8
 CASPER TOWER ★
 118.3 (CTAF) 257.8
 CASPER DEP CON ★
 120.65 354.1

BILLINGS
 114.5 BIL :---:
 Chan 92
 N45°48.51'-W108°37.48'
 L-13, H-1

SHERIDAN
 115.3 SHR :---:
 Chan 100
 N44°50.54'-W107°03.66'
 L-13, H-1-2

GILLETTE
 114.6 GCC :---:
 Chan 93
 N44°20.87'-W105°32.61'
 L-12-13, H-1-2

WORLAND
 114.8 RLY :---:
 Chan 95
 N43°57.85'-W107°57.05'
 L-11

CRAZY WOMAN
 117.3 CZI :---:
 Chan 120
 N43°59.98'-W106°26.14'
 L-11-12, H-1-2

RAPID CITY
 112.3 RAP :---:
 Chan 70
 N43°58.56'-W103°00.74'
 L-12, H-2

BOYSEN RESERVOIR
 117.8 BOY :---:
 Chan 125
 N43°27.79'-W108°17.98'
 L-11, H-3

RIVERTON
 108.8 RIW :---:
 Chan 25
 N43°03.94'-W108°27.33'
 L-11

MUDDY MOUNTAIN
 116.2 DDY :---:
 Chan 109
 N43°05.45'-W106°16.62'
 L-11-12, H-3-5

HIPSHER
 108.6 HP :---:
 Chan 23
 N42°40.57'-W105°13.57'
 L-12

ROCK SPRINGS
 116.0 OCS :---:
 Chan 107
 N41°35.41'-W109°00.92'
 L-11, H-3

CHEROKEE
 115.0 CKW :---:
 Chan 97
 N41°45.34'-W107°34.92'
 L-11, H-3

MEDICINE BOW
 111.6 MBW :---:
 Chan 53
 N41°50.73'-W106°00.26'
 L-12, H-3-5

CHEYENNE
 113.1 CYS :---:
 Chan 78
 N41°12.66'-W104°46.37'
 L-12, H-3-5

NOTE: Aircraft departing Runways 12 and 17 will be issued departure instructions by clearance delivery/ground control.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

All aircraft fly runway heading for radar vectors to filed/assigned fix/route. Maintain 14,000 feet or assigned lower altitude. Expect further clearance to filed altitude ten minutes after departure.

LOST COMMUNICATIONS: If no transmissions are received for one minute after departure, maintain runway heading until 7,000 feet, then climb to filed altitude via direct DDY VORTAC, then via assigned fix/route. Runways 3 and 8 turn left to DDY VORTAC, all others turn right to DDY VORTAC.

NW-1, 08 APR 2010 to 06 MAY 2010

ILS or LOC RWY 3




CASPER/NATRONA COUNTY INTL (CPR)

LOC I-SYD 111.3	APP CRS 032°	Rwy Idg TDZE Apt Elev	10165 5328 5350
---------------------------	------------------------	-----------------------------	--

▼ For inoperative MALS, increase S-ILS-3 Cat E visibility to RVR 4000, S-LOC-3 Cat E visibility to 3. MAMUE FIX MINIMUMS: For inoperative MALS, increase S-LOC-3 Cats D and E visibility to 1. DME from DDY VORTAC, simultaneous reception of I-SYD and DDY DME required. # RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALS MISSED APPROACH: Climb to 7500 then left turn direct DDY VORTAC and hold. (TACAN aircraft continue climb to 12000 via DDY VORTAC R-137 to DEALT/DDY 21 DME and hold SE, right turn, 317° inbound).

ATIS 126.15	CASPER APP CON * 120.65 354.1	CASPER TOWER * 118.3 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.9 257.8	CASPER RADIO 122.4	UNICOM 122.95
-----------------------	---	---	-------------------------	--------------------------------	------------------------------	-------------------------

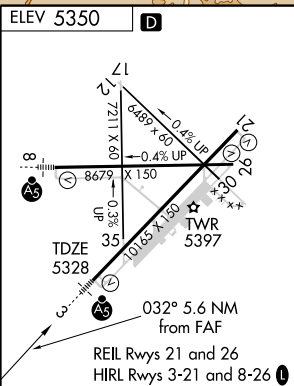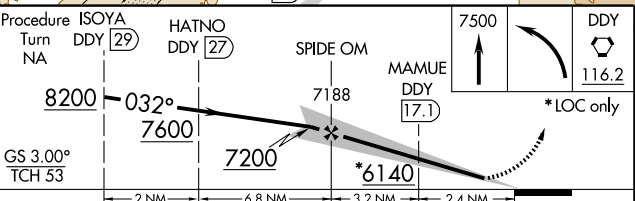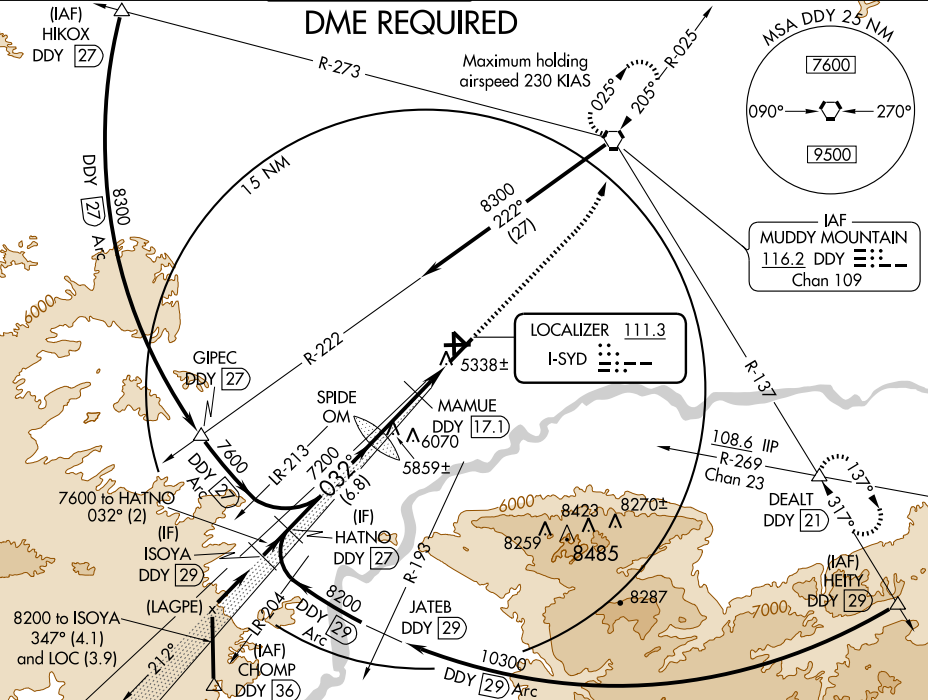

CATEGORY	A	B	C	D	E
S-ILS 3	# 5528/24 200 (200-½)				5528/24 200 (200-½)
S-LOC 3	6140/24 812 (800-½)	6140/40 812 (800-¾)	6140-2 812 (800-2)	6140-2¼ 812 (800-2¼)	6140-2 ½ 812 (800-2½)
CIRCLING	6140-1 790 (800-1)	6140-1¼ 790 (800-1¼)	6140-2½ 790 (800-2½)	6140-2¾ 790 (800-2¾)	6220-3 870 (900-3)
MAMUE FIX MINIMUMS					
S-LOC 3	5600/24 272 (300-½)		5600/40 272 (300-¾)		
CIRCLING	5780-1 430 (500-1)	5800-1 450 (500-1)	5800-1½ 450 (500-1½)	5900-2 550 (600-2)	6220-3 870 (900-3)

ELEV 5350	D				
Knots	60	90	120	150	180
Min:Sec	5:36	3:44	2:48	2:14	1:52

NW-1, 08 APR 2010 to 06 MAY 2010

ILS or LOC RWY 8

CASPER/NATRONA COUNTY INTL (CPR)





LOC I-CPR 110.3	APP CRS 077°	Rwy Idg TDZE Apt Elev	8679 5344 5350
---------------------------	------------------------	-----------------------------	---

▽ Inoperative table does not apply to S-ILS 8.



MISSED APPROACH: Climb to 7700 via heading 077° and DDD VORTAC R-159 to DDD VORTAC and hold.

ATIS 126.15	CASPER APP CON* 120.65 354.1	CASPER TOWER* 118.3 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.9 257.8	CASPER RADIO 122.4	UNICOM 122.95
-----------------------	--	--	-------------------------	--------------------------------	------------------------------	-------------------------

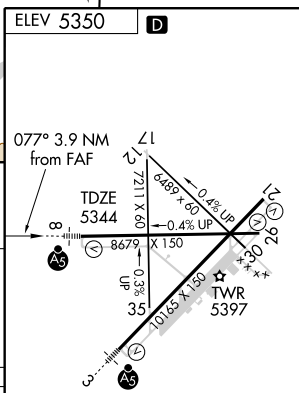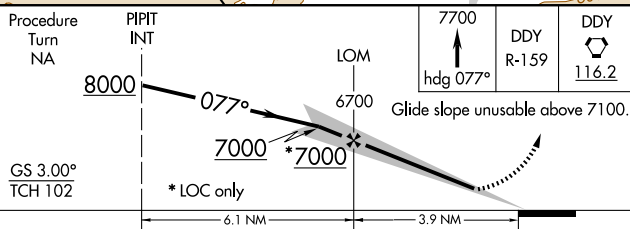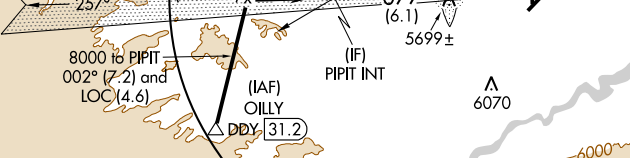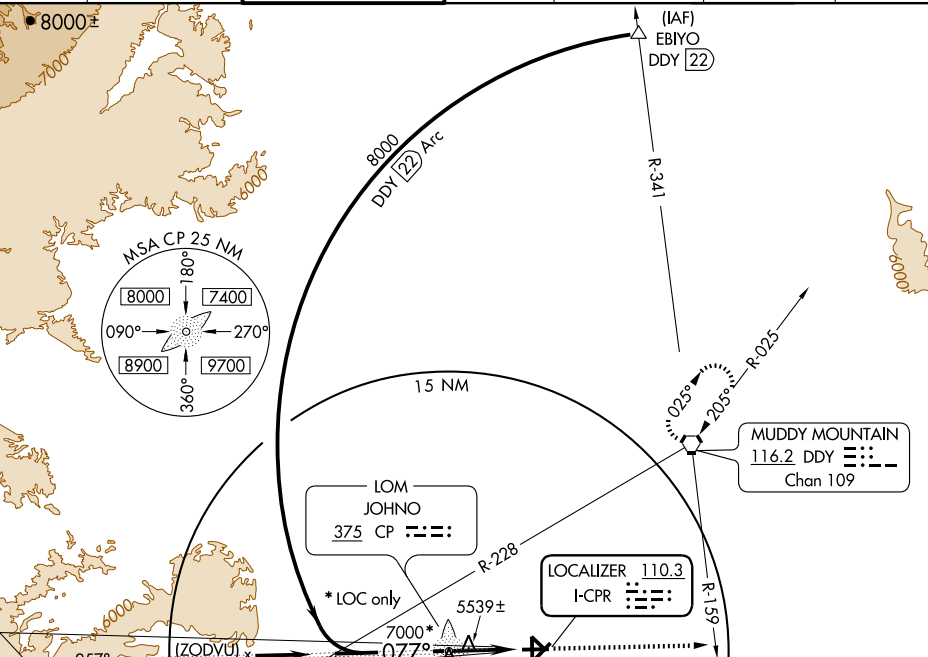

PROCEDURE	PIPIT INT	LOM	7700	DDY R-159	DDY 116.2
Turn NA			7700	DDY R-159	DDY 116.2
GS 3.00°			hdg 077°		
TCH 102					
	6.1 NM	3.9 NM			
CATEGORY	A	B	C	D	
S-ILS 8	5644/40 300 (300-3/4)			NA	
S-LOC 8	5800/24	456 (500-1/2)	5800/40 456 (500-3/4)	NA	
CIRCLING	5800-1	450 (500-1)	5800-1 1/2 450 (500-1 1/2)	NA	

REIL Rwy 21 and 26					
HIRL Rwy 3-21 and 8-26					
FAF to MAP 3.9 NM					
Knots	60	90	120	150	180
Min:Sec	3:54	2:36	1:57	1:34	1:18

NW-1, 08 APR 2010 to 06 MAY 2010

RNAV (GPS) RWY 3

CASPER/NATRONA COUNTY INTL (CPR)




WAAS CH 73006 W03A	APP CRS 032°	Rwy Idg TDZE Apt Elev	10165 5328 5350
---------------------------------	------------------------	-----------------------------	--

▼ For inoperative MALS, increase LPV all Cats visibility to 1 mile.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 38°C (100°F).
DME/DME RNP-0.3 NA.



MISSED APPROACH: Climb to 7500 direct KIVSE and via track 022° to DDY VORTAC and hold.

ATIS 126.15	CASPER APP CON* 120.65 354.1	CASPER TOWER* 118.3 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.9 257.8	CASPER RADIO 122.4	UNICOM 122.95
-----------------------	--	--	-------------------------	--------------------------------	------------------------------	-------------------------

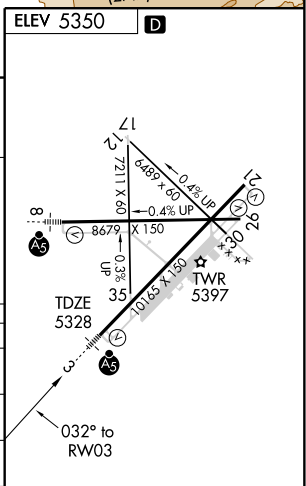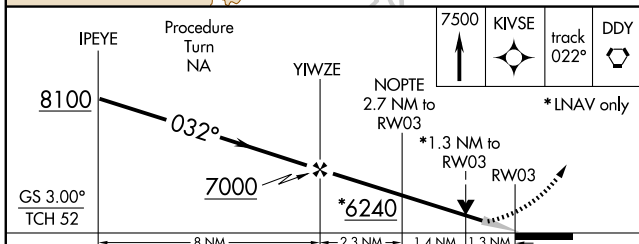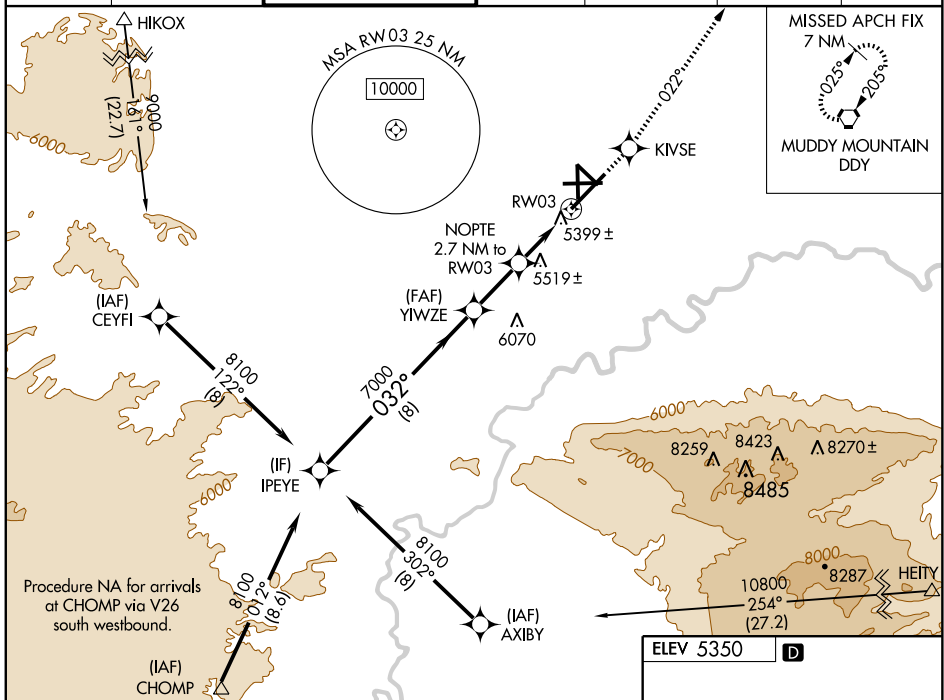

CATEGORY	A		B		C		D	
LPV DA	5643/24		315 (300-½)					
LNAV/VNAV DA	5691/40		363 (400-¾)					
LNAV MDA	5780/24		452 (500-½)		5780/40		5780/50	
	430 (500-1)		450 (500-1)		450 (500-1½)		452 (500-1)	
CIRCLING	5780-1		5800-1		5800-1½		5900-2	
	430 (500-1)		450 (500-1)		450 (500-1½)		550 (600-2)	

REIL Rwy 21 and 26
HIRL Rwy 3-21 and 8-26

RNAV (GPS) RWY 8

CASPER/NATRONA COUNTY INTL (CPR)



WAAS CH 86306 W08A	APP CRS 077°	Rwy ldg TDZE 8679 5344 Apt Elev 5350
-------------------------------------	---------------------	---

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 38°C (100°F).
DME/DME RNP-0.3 NA.




MISSED APPROACH: Climb to 7700 direct ROVEE and via track 015° to DDY VORTAC and hold.

ATIS 126.15	CASPER APP CON * 120.65 354.1	CASPER TOWER * 118.3 (CTAF) 0257.8	GND CON 121.9	CLNC DEL 121.9 257.8	CASPER RADIO 122.4	UNICOM 122.95
--------------------	--------------------------------------	---	----------------------	-----------------------------	---------------------------	----------------------

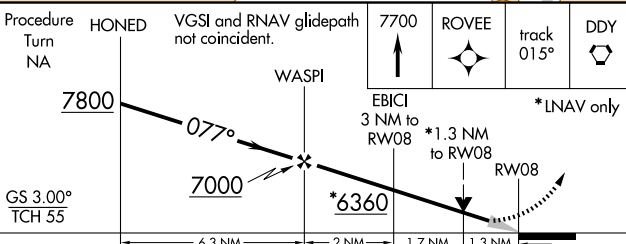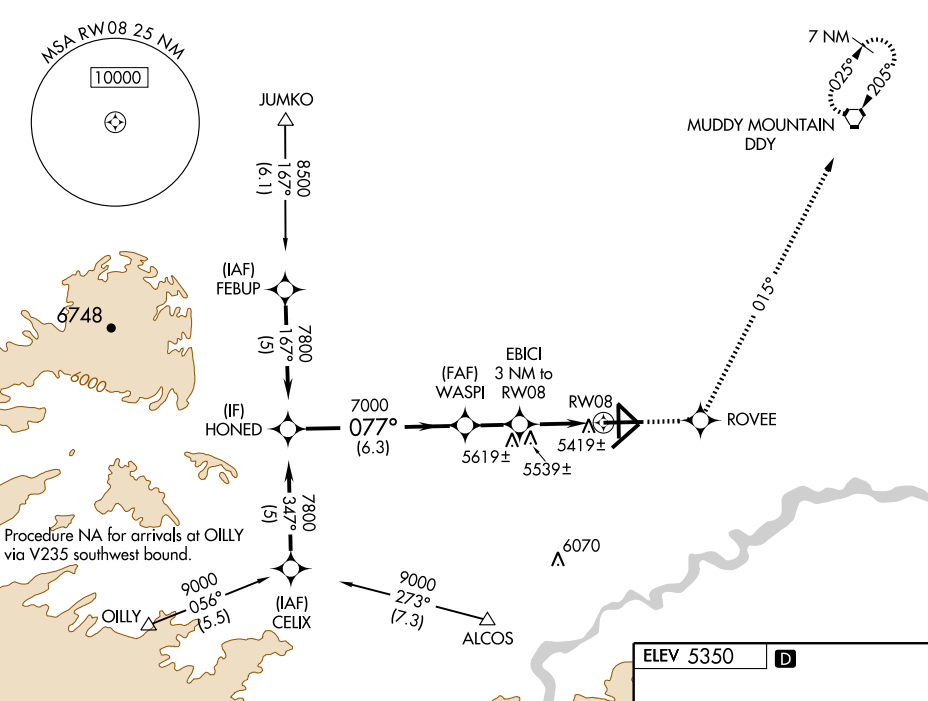

CATEGORY	A	B	C	D
LPV DA		5594/24	250 (300-½)	
LNAV/VNAV DA		5689/40	345 (400-¾)	
LNAV MDA	5800/24	456 (500-½)	5800/40 456 (500-¾)	5800/50 456 (500-1)
CIRCLING	5800-1	450 (500-1)	5800-1½ 450 (500-1½)	5900-2 550 (600-2)

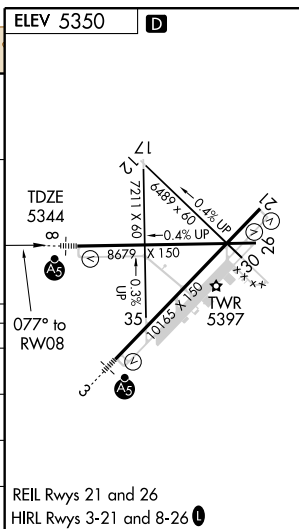

REIL Rwy 21 and 26
HIRL Rwy 3-21 and 8-26

WAAS CH 63012 W21A	APP CRS 212°	Rwy Idg TDZE 10165 5330 Apt Elev 5350
--	------------------------	--


RNAV (GPS) RWY 21

CASPER/NATRONA COUNTY INTL (CPR)



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 38°C (100°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 8100 direct NASOE and right turn via track 302° to FERBI and via track 060° to DDY VORTAC and hold.

ATIS 126.15	CASPER APP CON * 120.65 354.1	CASPER TOWER * 118.3 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.9 257.8	CASPER RADIO 122.4	UNICOM 122.95
-----------------------	---	---	-------------------------	--------------------------------	------------------------------	-------------------------

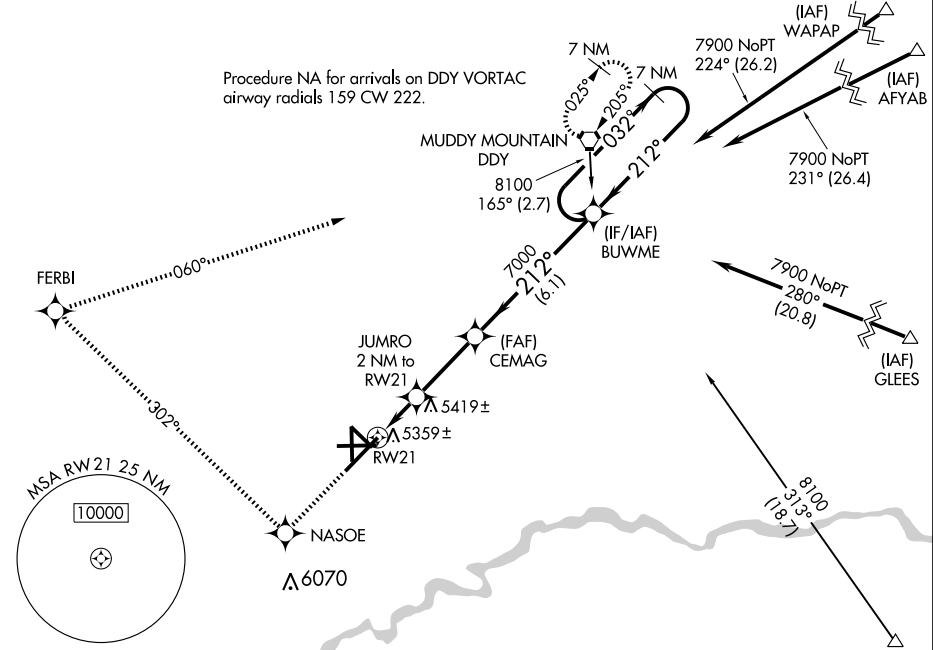

ELEV 5350	D
-----------	----------

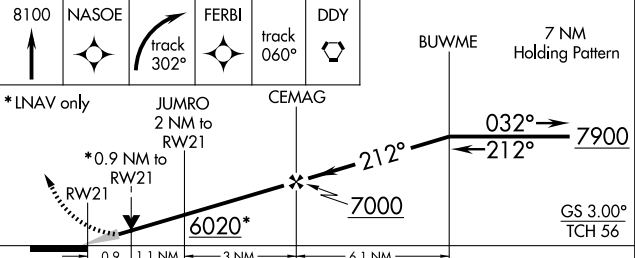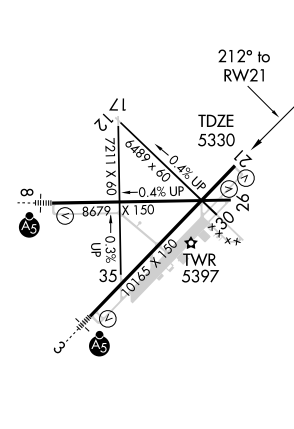

CATEGORY	A	B	C	D
LPV DA	5580-3/4		250 (300-3/4)	
LNAV/VNAV DA	5629-1		299 (300-1)	
LNAV MDA	5680-1		350 (400-1)	
CIRCLING	5780-1	5800-1	5800-1 1/2	5900-2
	430 (500-1)	450 (500-1)	450 (500-1 1/2)	550 (600-2)

REIL Rwy 21 and 26
HIRL Rwy 3-21 and 8-26

NW-1. 08 APR 2010 TO 06 MAY 2010

RNAV (GPS) RWY 26


CASPER/NATRONA COUNTY INTL (CPR)

WAAS CH 78112 W26A	APP CRS 257°	Rwy Idg TDZE 5335 Apt Elev 5350
---------------------------------	------------------------	---



▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 38°C (100°F).
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 8400 direct DIBKE and right turn via track 347° to COKRO and via track 065° to DDY VORTAC and hold.

ATIS 126.15	CASPER APP CON* 120.65 354.1	CASPER TOWER* 118.3 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.9 257.8	CASPER RADIO 122.4	UNICOM 122.95
-----------------------	--	--	-------------------------	--------------------------------	------------------------------	-------------------------

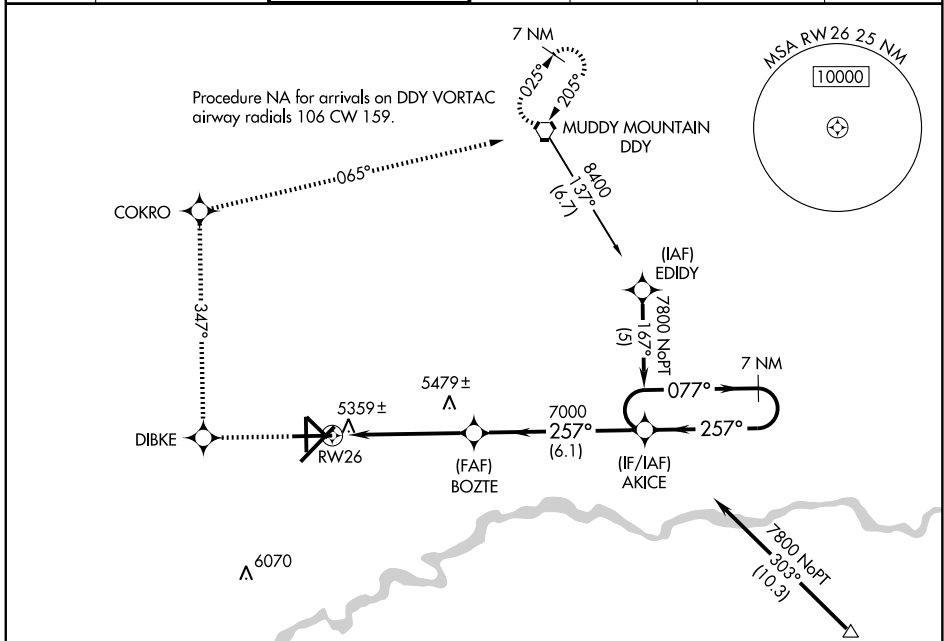

ELEV 5350	D
-----------	----------

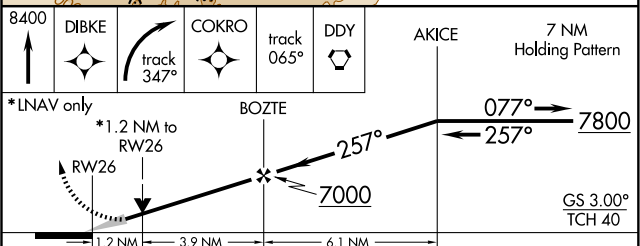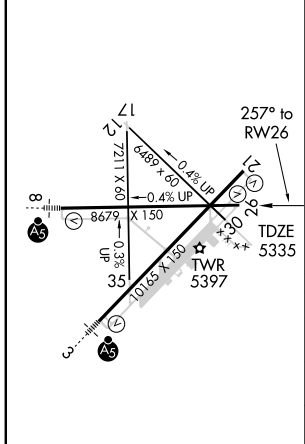

CATEGORY	A	B	C	D
LPV DA		5585-1	250 (300-1)	
LNAV/VNAV DA		5629-1	294 (300-1)	
LNAV MDA	5740-1	405 (400-1)	5740-1¼	405 (400-1¼)
CIRCLING	5780-1	5800-1	5800-1½	5900-2
	430 (500-1)	450 (500-1)	450 (500-1½)	550 (600-2)

REIL Rwy 21 and 26
HIRL Rwy 3-21 and 8-26



VOR/DME or TACAN RWY 21

CASPER/NATRONA COUNTY INTL (CPR)



VORTAC DDY 116.2 Chan 109	APP CRS 203°	Rwy Idg TDZE Apt Elev 10165 5330 5350
---	------------------------	---

MISSED APPROACH: Climb to 5800, then climbing right turn to 7600 direct DDY VORTAC and hold (TACAN aircraft continue climb to 8000 via DDY VORTAC R-011 to CESPI/10 DME and Hold N, RT, 191° inbound).

ATIS 126.15	CASPER APP CON * 120.65 354.1	CASPER TOWER * 118.3 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.9 257.8	CASPER RADIO 122.4	UNICOM 122.95
-----------------------	---	---	-------------------------	--------------------------------	------------------------------	-------------------------

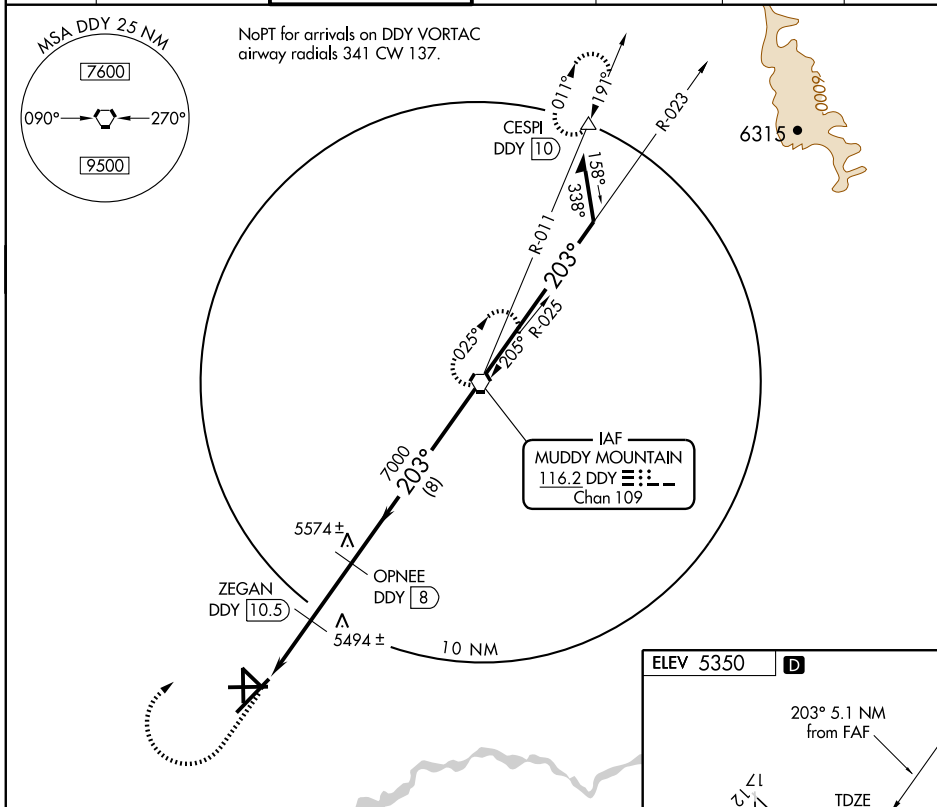

NoPT for arrivals on DDY VORTAC airway radials 341 CW 137.

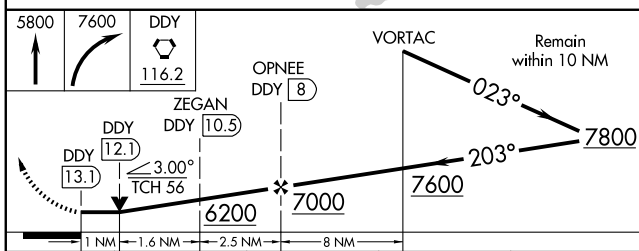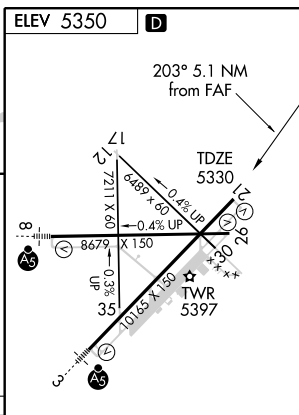

CATEGORY	A	B	C	D
S-21	5680-1 350 (400-1)			5680-1½ 350 (400-1½)
CIRCLING	5780-1 430 (500-1)	5800-1 450 (500-1)	5800-1½ 450 (500-1½)	5900-2 550 (600-2)

REIL Rwy 21 and 26
HIRL Rwy 3-21 and 8-26

VOR/DME RWY 3




CASPER/NATRONA COUNTY INTL (CPR)

VORTAC DDDY	APP CRS	Rwy Idg	10165
116.2	025°	TDZE	5328
Chan 109		Apt Elev	5350



MISSED APPROACH: Climb to 7600 direct DDDY VORTAC and hold.

ATIS	CASPER APP CON *	CASPER TOWER *	GND CON	CLNC DEL	CASPER RADIO	UNICOM
126.15	120.65 354.1	118.3 (CTAF) 257.8	121.9	121.9 257.8	122.4	122.95

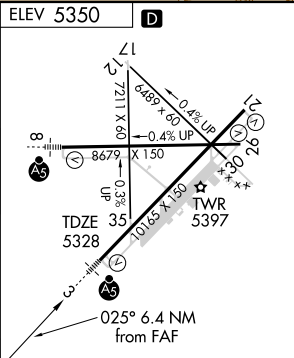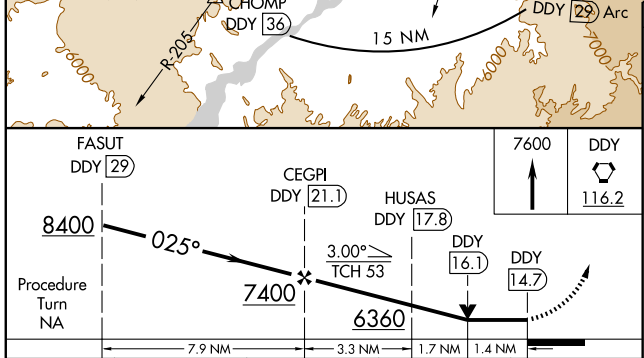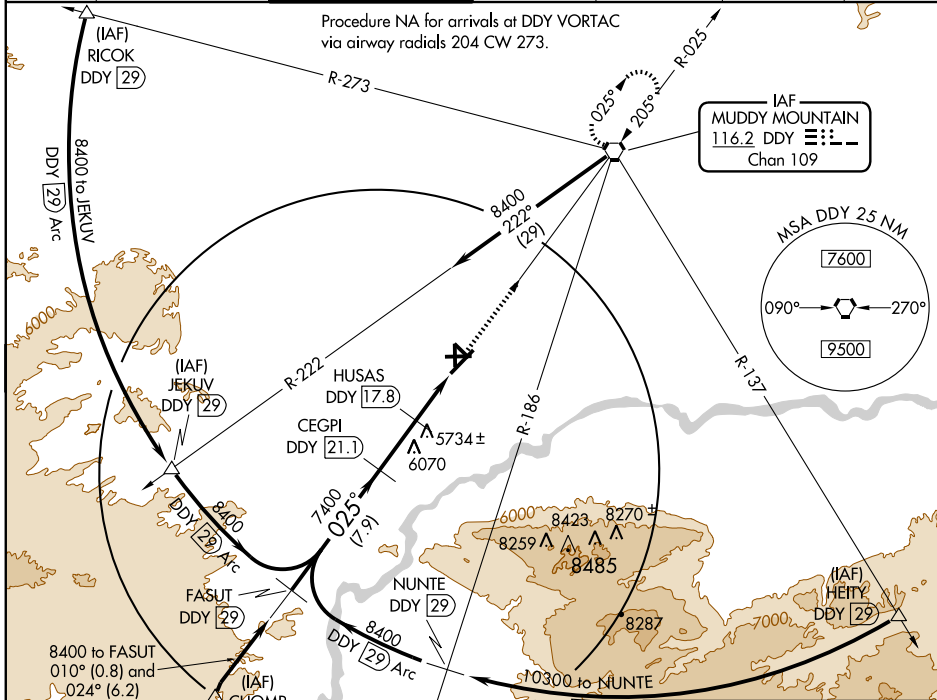


CATEGORY	A	B	C	D
S-3	5820/24 492 (500-½)		5820/40 492 (500-¾)	5820/50 492 (500-1)
CIRCLING	5820-1 470 (500-1)		5820-1½ 470 (500-1½)	5900-2 550 (600-2)

REIL Rwy 21 and 26
HIRL Rwy 3-21 and 8-26

AIRPORT DIAGRAM

AL-80 (FAA)

CHEYENNE RGNL/JERRY OLSON FIELD (CYS)
CHEYENNE, WYOMING

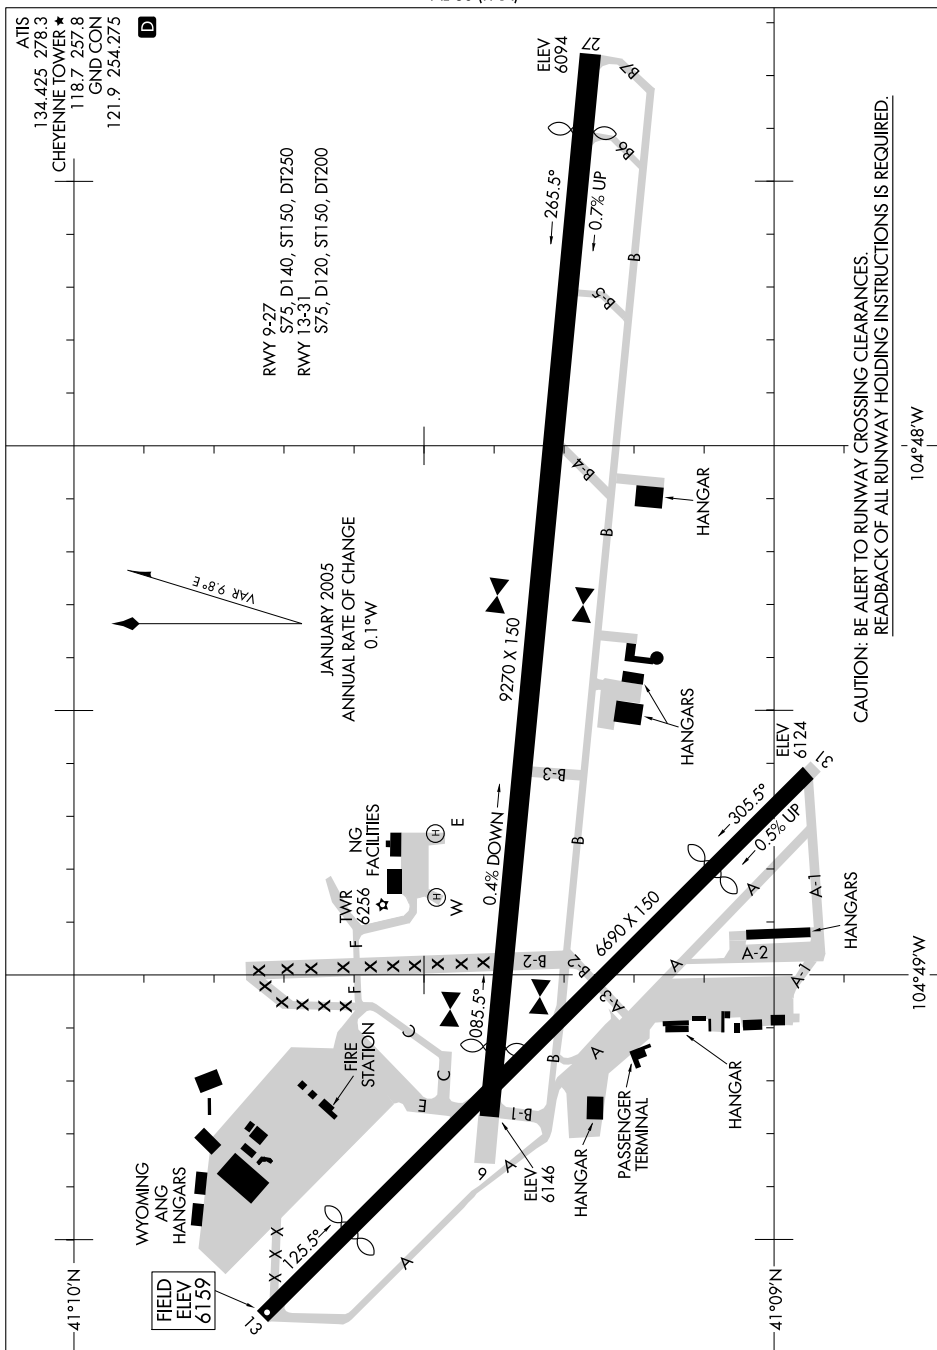

NW-1, 08 APR 2010 to 06 MAY 2010

LOC I-CYS 110.1	APP CRS 265°	Rwy Idg 7985
		TDZE 6121
		Apt Elev 6160

ILS or LOC RWY 27



CHEYENNE RGNL/JERRY OLSON FIELD (CYS)

▲ For inoperative MALSRS, increase S-LOC 27 Cat D visibility to RVR 5000.
▲ ASR/PAR * RVR 1800 authorized with the use of FD or AP or HUD to DA.




MISSED APPROACH: Climb to 6700, then climbing right turn to 8000 direct CYS VORTAC and hold. (TACAN aircraft continue via CYS R-016 to MARKL/10 DME and hold N, RT, 196° inbound.)


ATIS 134.425 278.3	CHEYENNE APP CON 124.55 263.075	CHEYENNE TOWER * 118.7 (CTAF) 0 257.8	GND CON 121.9 254.275	UNICOM 122.95
------------------------------	---	---	---------------------------------	-------------------------

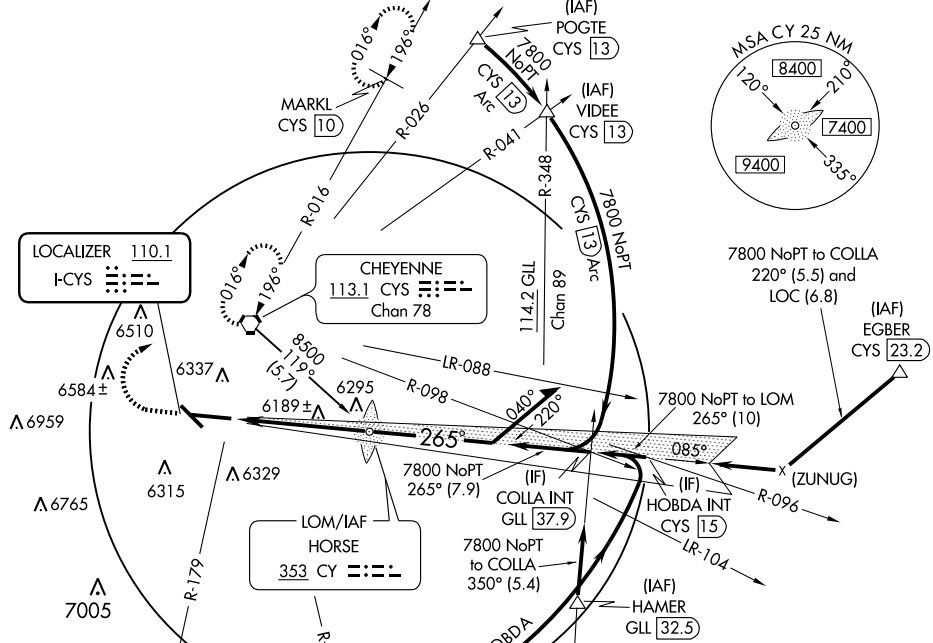

6700	8000	CYS
↑	↷	113.1

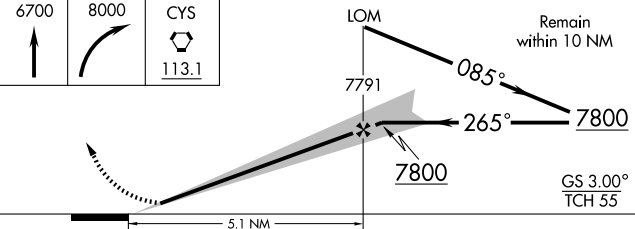

ELEV 6160 **D**

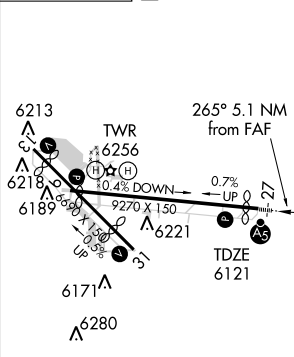

CATEGORY	A	B	C	D	Knots	60	90	120	150	180
S-ILS 27	*6321/24 200 (200-½)				Min:Sec	5:06	3:24	2:33	2:02	1:42
S-LOC 27	6440/24 319 (300-½)		6440/40 319 (300-¾)		FAF to MAP 5.1 NM					
CIRCLING	6660-1 500 (500-1)		6660-1½ 500 (500-1½)		6720-2 560 (600-2)					

NDB RWY 27

CHEYENNE RGNL/JERRY OLSON FIELD (CYS)





LOM CY 353	APP CRS 265°	Rwy Idg TDZE Apt Elev	7985 6121 6156
----------------------	------------------------	-----------------------------	---

ASR/PAR

MALSR

MISSED APPROACH: Climb to 6700, then climbing right turn to 7800 direct HORSE LOM and hold.

ATIS 134.425 278.3	CHEYENNE APP CON 124.55 263.075	CHEYENNE TOWER * 118.7 (CTAF) 0 257.8	GND CON 121.9 254.275	UNICOM 122.95
------------------------------	---	---	---------------------------------	-------------------------

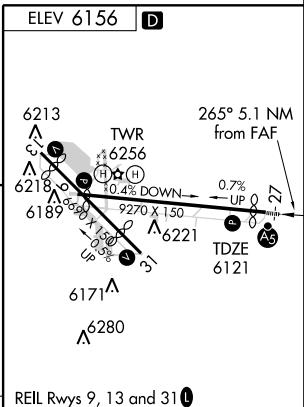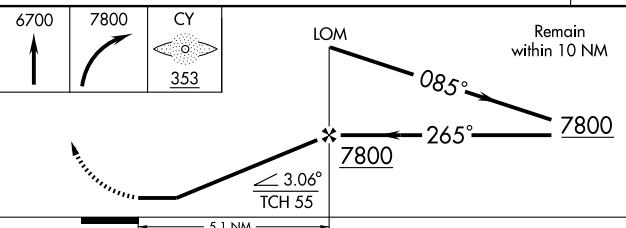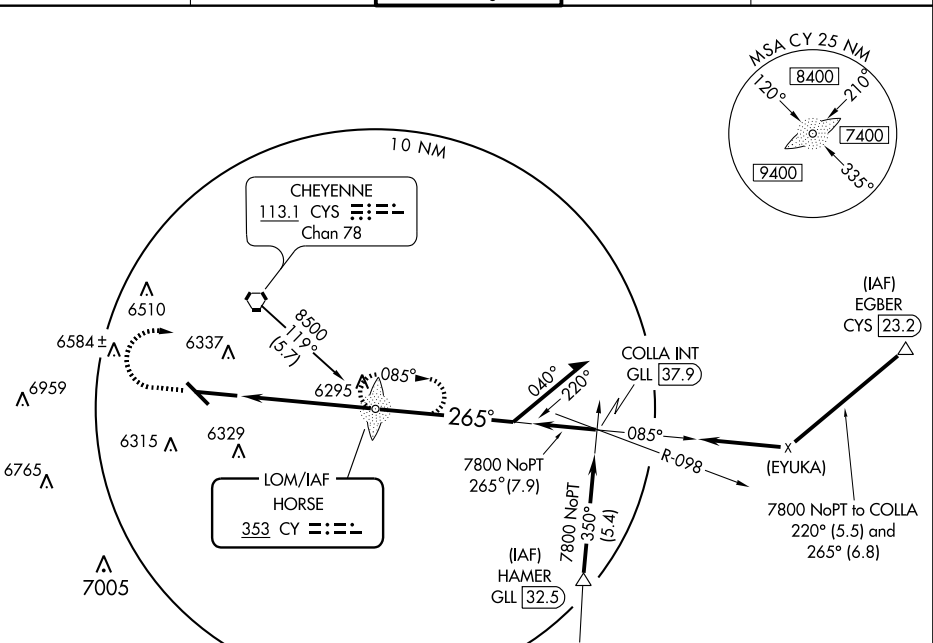

CATEGORY	A	B	C	D	FAF to MAP 5.1 NM					
S-27	6620/50 499 (500-1)		6620/60 499 (500-1½)	6620-1½ 499 (500-1½)	Knots	60	90	120	150	180
CIRCLING	6660-1 504 (600-1)		6660-1½ 504 (600-1½)	6720-2 564 (600-2)	Min:Sec	5:06	3:24	2:33	2:02	1:42

NW-1, 08 APR 2010 to 06 MAY 2010

RNAV (GPS) RWY 9

CHEYENNE RGNL/JERRY OLSON FIELD (CYS)





WAAS CH 73009 W09A	APP CRS 085°	Rwy Idg 7985
		TDZE 6143
		Apt Elev 6159

ASR/PAR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C (-1.6°F) or above 36°C (96°F).
 DME/DME RNP -0.3 NA. Visibility reduction by helicopters NA.
 When local altimeter setting not received, use Laramie altimeter setting and increase all DA 251 feet, all MDA 260 feet, and all visibilities ¾ mile.
 VDP and Baro-VNAV NA when using Laramie altimeter setting.



MISSED APPROACH: Climb to 8500 direct CIVOS and via 121° track to HAMER and hold.

ATIS 134.425 278.3	CHEYENNE APP CON 124.55 263.075	CHEYENNE TOWER * 118.7 (CTAF) 0 257.8	GND CON 121.9 254.275	UNICOM 122.95
-------------------------------------	--	--	--	--------------------------------

Procedure NA for arrivals at CYS VORTAC via airway radials 267 CW 292, and for arrivals at BARGR via V4 southeastbound.

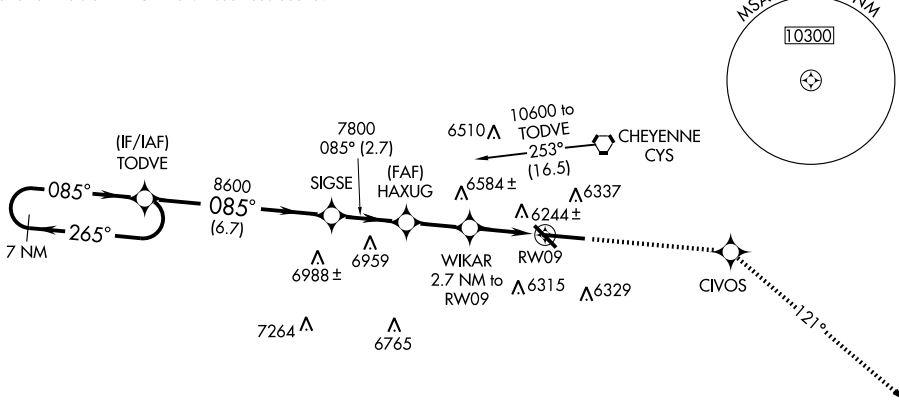

ELEV 6159 **D**

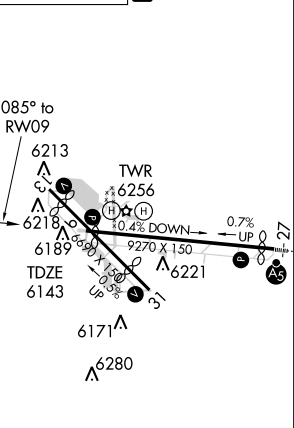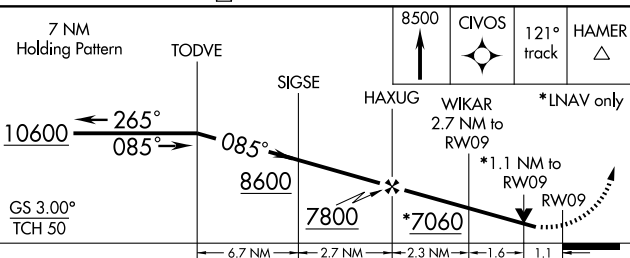

CATEGORY	A	B	C	D
LPV DA		6473-1¼	330 (400-1¼)	
LNAV/VNAV DA		6542-1½	399 (400-1½)	
LNAV MDA	6540-1	397 (400-1)		6540-1¼ 397 (400-1¼)
CIRCLING	6660-1	501 (600-1)	6660-1½ 501 (600-1½)	6720-2 561 (600-2)

REIL Rwy 9, 13, and 31 **L**
 HIRL Rwy 9-27 **L**
 MIRL Rwy 13-31 **L**

RNAV (GPS) RWY 13


CHEYENNE RGNL/JERRY OLSON FIELD (CYS)

WAAS CH 56609 W13A	APP CRS 125°	Rwy Idg TDZE Apt Elev	4469 6154 6159
--	------------------------	-----------------------------	---


▽ Baro-VNAV NA when using Laramie altimeter setting.
▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C (-16°F) or above 36°C (96°F).
ASR/PAR DME/DME RNP -0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Laramie altimeter setting and increase all DA/MDA 260 feet and all visibilities 1 mile.

MISSED APPROACH: Climb to 8500 direct KOREC and via 103° track to HAMER and hold.


ATIS 134.425 278.3	CHEYENNE APP CON 124.55 263.075	CHEYENNE TOWER * 118.7 (CTAF) 0 257.8	GND CON 121.9 254.275	UNICOM 122.95
------------------------------	---	---	---------------------------------	-------------------------

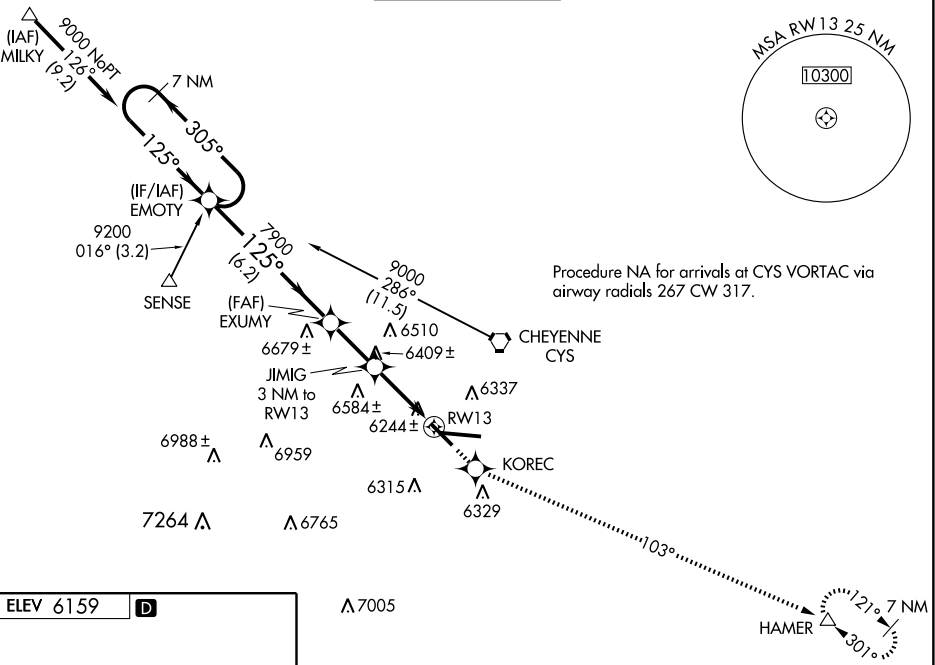

ELEV 6159 **D**

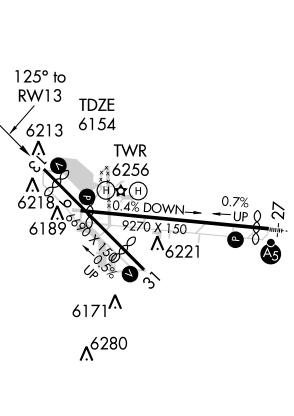

REIL Rwy 9, 13 and 31 **1**
 HIRL Rwy 9-27 **1**
 MIRL Rwy 13-31 **1**

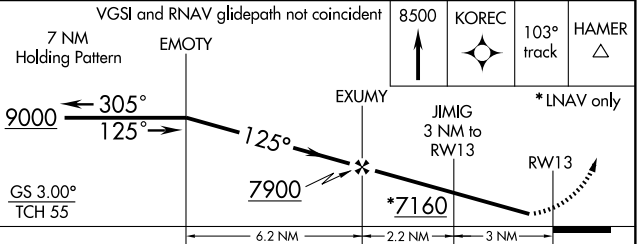

CATEGORY	A	B	C	D
LPV DA	6481-1 327 (400-1)			
LNAV/VNAV DA	6539-1¼ 385 (400-1¼)			
LNAV MDA	6660-1 506 (600-1)		6660-1½ 506 (600-1½)	
CIRCLING	6660-1 501 (600-1)		6660-1½ 501 (600-1½) 6720-2 561 (600-2)	

NW-1. 08 APR 2010 to 06 MAY 2010


WAAS CH 70307 W27A	APP CRS 265°	Rwy Idg TDZE Apt Elev	7985 6121 6160
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 27



CHEYENNE RGNL/JERRY OLSON FIELD (CYS)

ASR/PAR	Baro-VNAV NA below -27°C (-1.6°F). DME/DME RNP-0.3 NA.	MALSR 	MISSED APPROACH: Climb to 10300 direct AYYU and via 291° track to SENSE and hold, continue climb-in-hold to 10300.
---------	---	-----------	--

ATIS 134.425 278.3	CHEYENNE APP CON 124.55 263.075	CHEYENNE TOWER * 118.7 (CTAF) 0 257.8	GND CON 121.9 254.275	UNICOM 122.95
------------------------------	---	---	---------------------------------	-------------------------

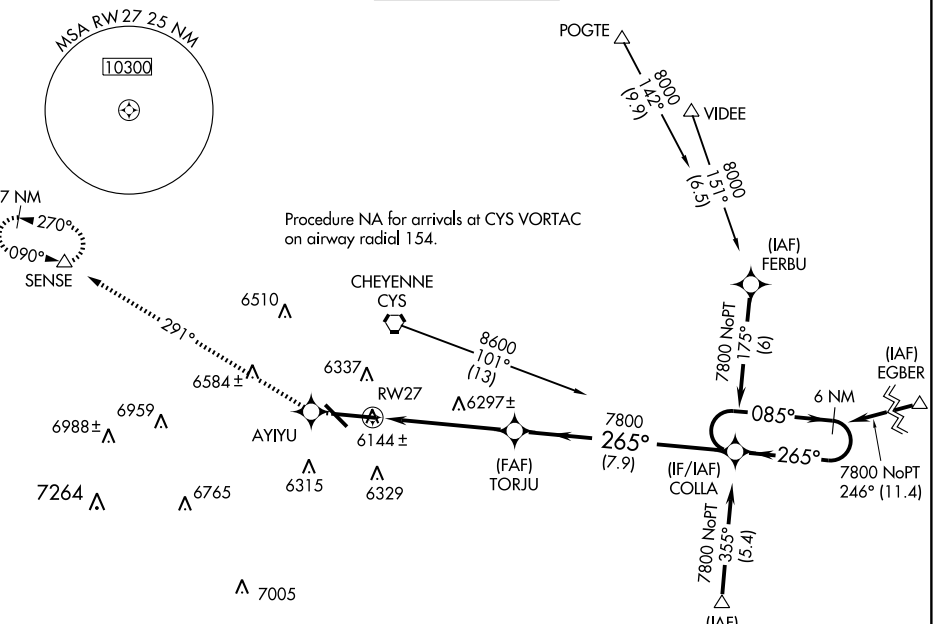

ELEV 6160	D
-----------	----------

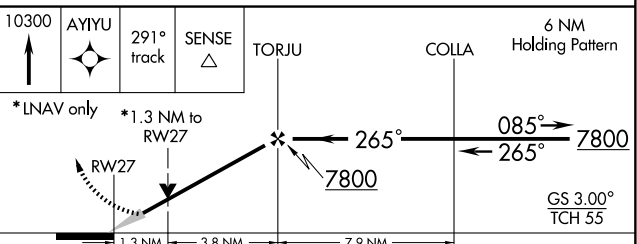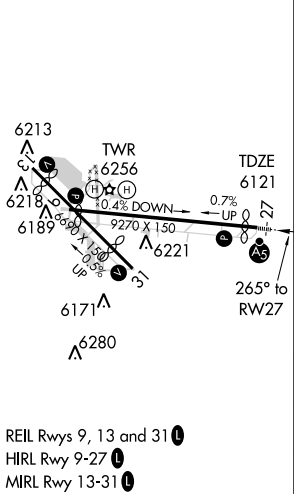

CATEGORY	A	B	C	D
LPV DA	6380/24		259 (300-½)	
LNAV/VNAV DA	6480/40		359 (400-¾)	
LNAV MDA	6560/24	439 (400-½)	6560/40 439 (400-¾)	6560/50 439 (400-1)
CIRCLING	6660-1	500 (500-1)	6660-1½ 500 (500-1½)	6720-2 560 (600-2)

RNAV (GPS) RWY 31


CHEYENNE RGNL/JERRY OLSON FIELD (CYS)

WAAS CH 99609 W31A	APP CRS 305°	Rwy ldg TDZE 4469 6147 Apt Elev 6159
--	------------------------	--



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C (-16°F) or above 36°C (96°F).
 DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
 VDP and Baro-VNAV NA when using Laramie altimeter setting.
 When local altimeter setting not received, use Laramie altimeter setting and increase all DA/MDA 260 feet and all visibilities ¾ mile.

MISSED APPROACH: Climb to 10300 direct IVUCI and via 287° track to SENSE and hold, continue climb-in-hold to 10300.

ATIS 134.425 278.3	CHEYENNE APP CON 124.55 263.075	CHEYENNE TOWER * 118.7(CTAF) 0 257.8	GND CON 121.9 254.275	UNICOM 122.95
------------------------------	---	--	---------------------------------	-------------------------

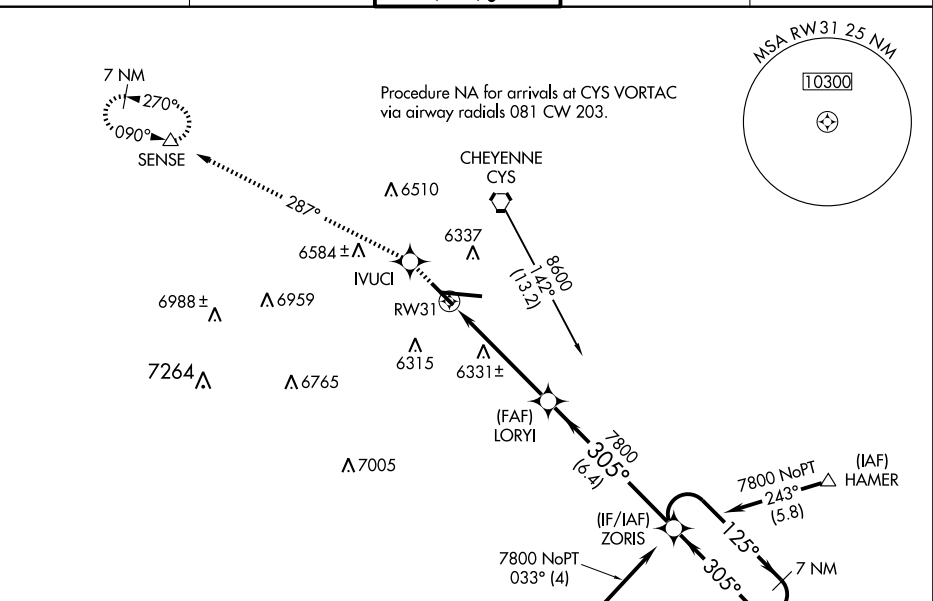

ELEV 6159 **D**

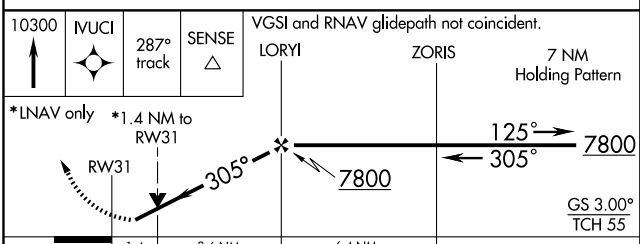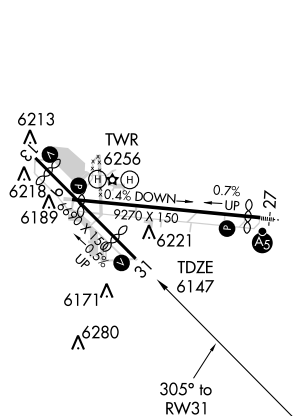

CATEGORY	A	B	C	D
LPV DA	6397-1 250 (300-1)			
LNAV/VNAV DA	6545-1½ 398 (400-1½)			
LNAV MDA	6600-1 453 (500-1)	6600-1¼ 453 (500-1¼)	6600-1½ 453 (500-1½)	6600-1½ 453 (500-1½)
CIRCLING	6660-1 501 (600-1)	6660-1½ 501 (600-1½)	6720-2 561 (600-2)	6720-2 561 (600-2)

REIL Rwy 9, 13 and 31 **1**
 HIRL Rwy 9-27 **1**
 MIRL Rwy 13-31 **1**

VOR or TACAN-A




CHEYENNE RGNL/JERRY OLSON FIELD (CYS)

VORTAC CYS 113.1 Chan 78	APP CRS 196°	Rwy Idg TDZE Apt Elev N/A N/A 6156
--	------------------------	--

MISSED APPROACH: Climbing left turn to 8000 via heading 350° and CYS VORTAC R-140 to CYS VORTAC and hold, continue climb-in-hold to 8000 (TACAN aircraft continue via CYS R-016 to MARKL/10 DME and hold N, RT, 196° inbound.)

ASR/PAR

ATIS 134.425 278.3	CHEYENNE APP CON 124.55 263.075	CHEYENNE TOWER * 118.7 (CTAF) 0 257.8	GND CON 121.9 254.275	UNICOM 122.95
------------------------------	---	---	---------------------------------	-------------------------

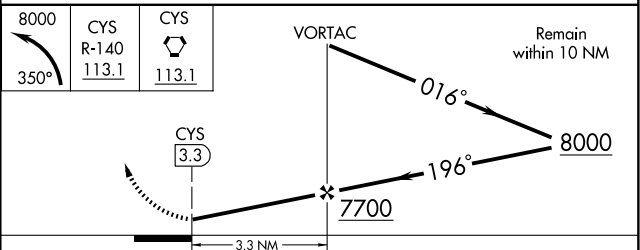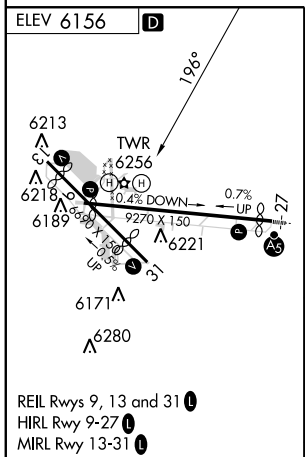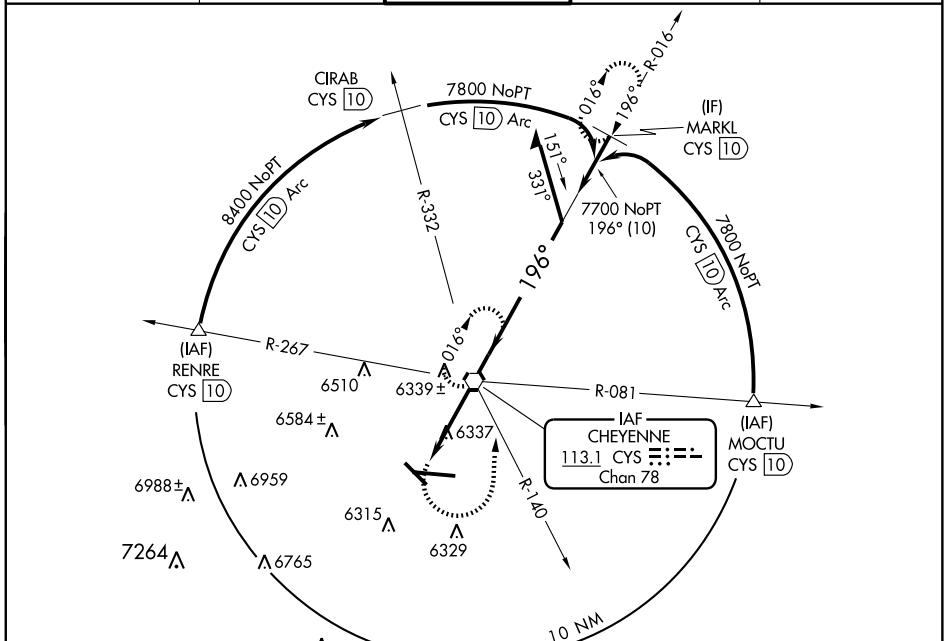

FAF to MAP 3.3 NM					
Knots	60	90	120	150	180
Min:Sec	3:18	2:12	1:39	1:19	1:06
CATEGORY	A		B		C
CIRCLING	6660-1		504 (600-1)		6660-1½ 504 (600-1½)
					D
					6720-2 564 (600-2)

APP CRS 306°	Rwy Idg TDZE Apt Elev	N/A N/A 5098
------------------------	-----------------------------	---------------------------


NA

MISSED APPROACH: Climbing right turn to 6800 via 001° course to OLVOR WP and hold.



AWOS-3
135.075

SALT LAKE CENTER
133.25 285.6

UNICOM
122.8 (CTAF)

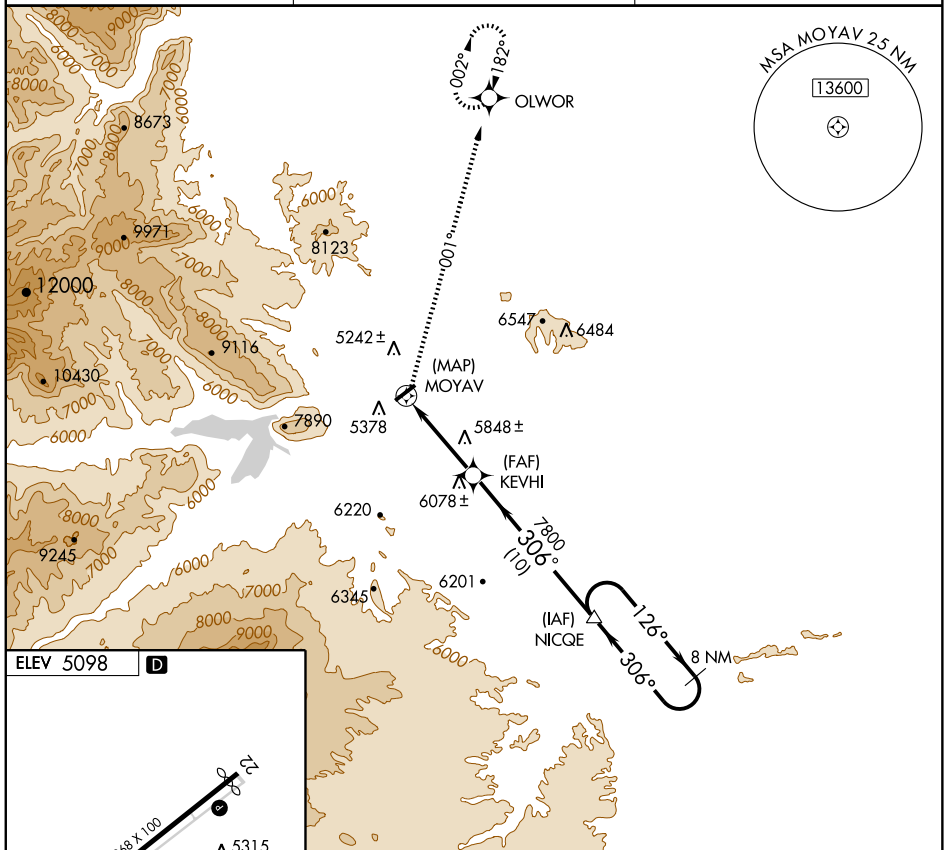

ELEV 5098 **D**

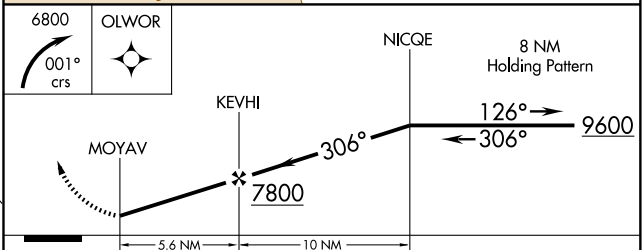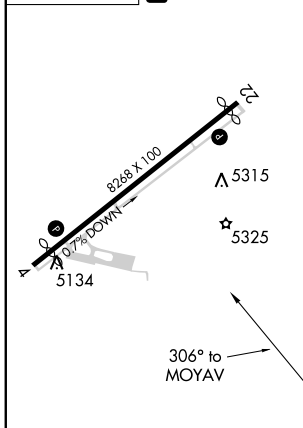

REIL Rwys 4 and 22 D	MIRL Rwy 4-22 D		
CATEGORY	A	B	C D
CIRCLING	6100-1¼ 1002 (1100-1¼)	6100-1½ 1002 (1100-1½)	6100-3 1002 (1100-3)

RNAV (GPS) RWY 22

CODY/ YELLOWSTONE RGNL (COD)

WAAS CH 93600 W22A	APP CRS 218°	Rwy Idg TDZE Apt Elev 7178 5076 5102
---------------------------------	------------------------	--


V
A DME/DME RNP- 0.3 NA.

MISSED APPROACH: Climb to 9600 direct AJKEV and left turn via 123° track to NICQE and hold.



AWOS-3
135.075

SALT LAKE CENTER
133.25 285.6

UNICOM
122.8 (CTAF) 0

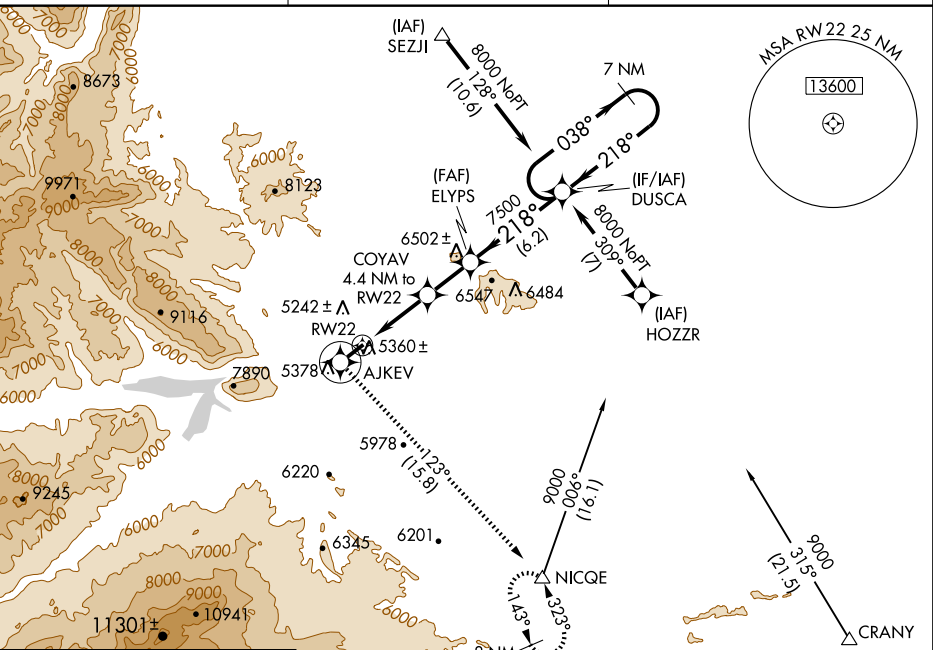

ELEV 5102 **D**

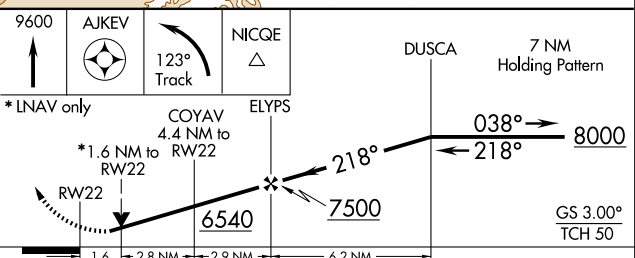

Procedure NA for arrivals at CRANY via V187 and V319 southeast bound.

CATEGORY	A	B	C	D
LPV DA	5457-1¼ 381 (400-1¼)			
LNAV/VNAV DA	NA			
LNAV MDA	5620-1	544 (600-1)	5620-1½ 544 (600-1½)	5620-1¾ 544 (600-1¾)
CIRCLING	5840-1¼	738 (800-1¼)	5900-2¼ 798 (800-2¼)	5960-2¾ 858 (900-2¾)

REIL Rwy 4 and 22 **0**
MIRL Rwy 4-22 **0**

CODY, WYOMING

AL-5243 (FAA)





VOR/DME COD 111.8 Chan 55	APP CRS 189°	Rwy Idg TDZE Apt Elev	N/A N/A 5098
---	------------------------	-----------------------------	---

VOR or GPS-A

CODY/ YELLOWSTONE RGNL (COD)

▲
▲ MISSED APPROACH: Climbing left turn to 8000 direct COD VOR/DME and hold.

AWOS-3 135.075	SALT LAKE CENTER 133.25 285.6	UNICOM 122.8 (CTAF) ①
--------------------------	---	---------------------------------

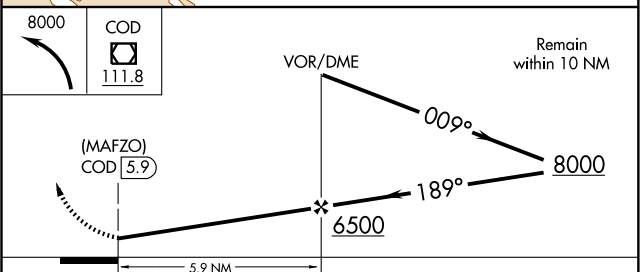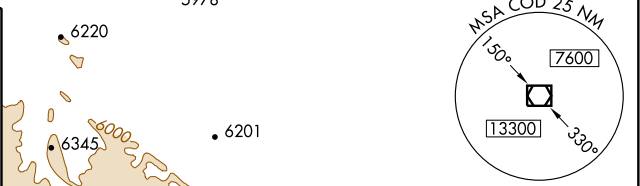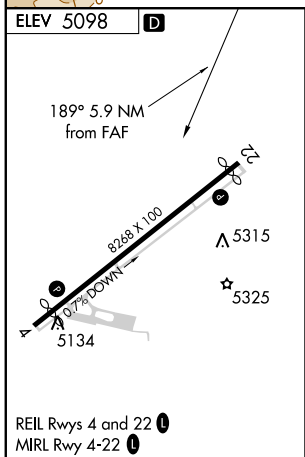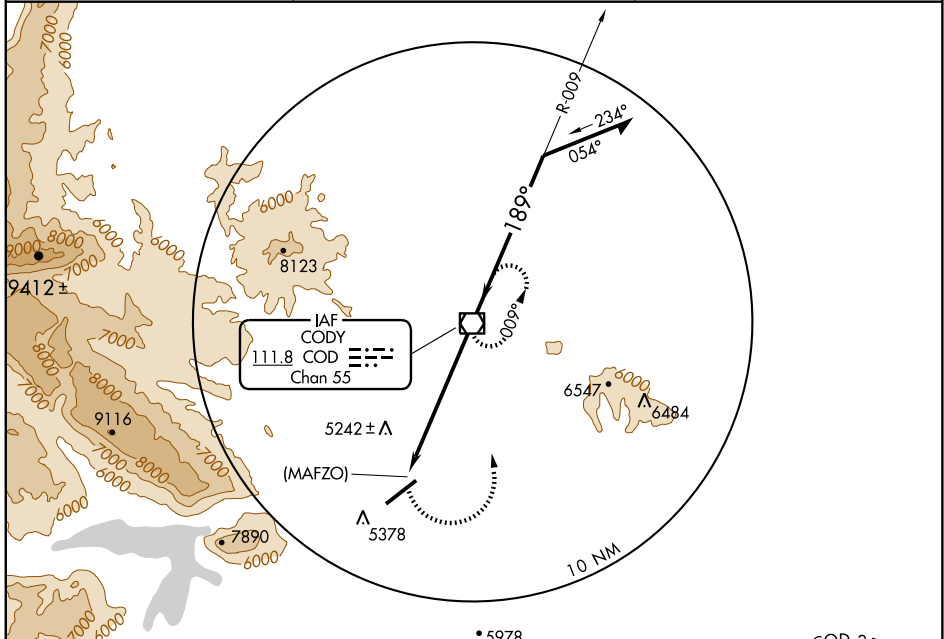

FAF to MAP 5.9 NM						
Knots	60	90	120	150	180	
Min:Sec	5:54	3:56	2:57	2:22	1:58	
CATEGORY	A		B		C	D
CIRCLING	5800-1		701 (800-1)		5800-2 701 (800-2)	5920-2¾ 821 (900-2¾)

NW-1. 08 APR 2010 to 06 MAY 2010

NDB or GPS RWY 9

COWLEY/ NORTH BIG HORN COUNTY (U68)

NDB HCY 257	APP CRS 078°	Rwy Idg TDZE Apt Elev	5199 4080 4090
-----------------------	------------------------	-----------------------------	---


▼ Obtain local altimeter setting on CTAF;
 ▲ NA when not received, procedure NA.

MISSED APPROACH: Climbing right turn to 6100 in HCY NDB holding pattern.

AWOS-3
119.925



SALT LAKE CENTER
133.25 285.6

UNICOM
122.8 (CTAF)

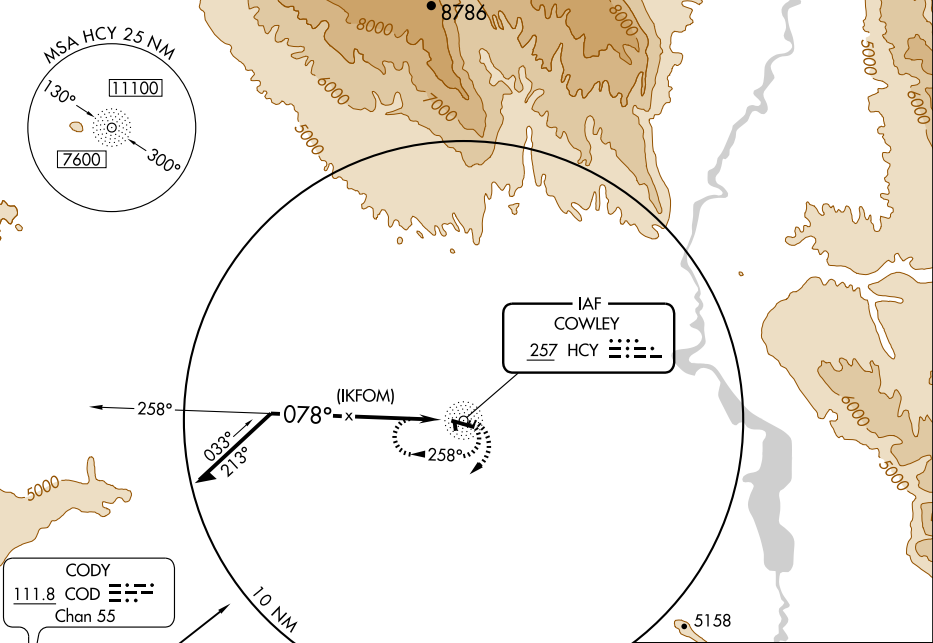

CODY
111.8 COD
Chan 55

ELEV 4090

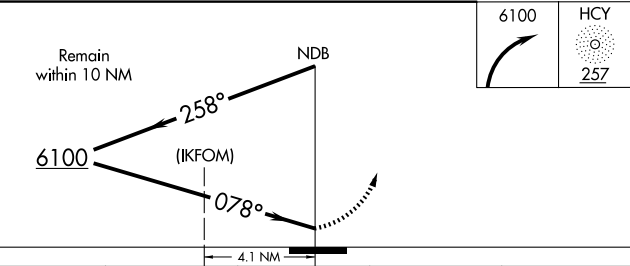

CATEGORY	A	B	C	D
S-9	4860-1 780 (800-1)	4860-1¼ 780 (800-1¼)	4860-2¼ 780 (800-2¼)	4860-2½ 780 (800-2½)
CIRCLING	4860-1 770 (800-1)	4860-1¼ 770 (800-1¼)	4860-2¼ 770 (800-2¼)	4860-2½ 770 (800-2½)

REIL Rwy 9 and 27
 MRL Rwy 9-27


RNAV (GPS) RWY 29

DOUGLAS / CONVERSE COUNTY (DGW)


APP CRS	Rwy Idg	6534
287°	TDZE	4933
	Apt Elev	4933

▼ DME/DME RNP-0.3 NA. MISSED APPROACH: Climbing left turn to 7900 direct IIP VOR/DME and hold, continue-in-hold to 7900.


ASOS 135,225	DENVER CENTER 135.6 363,025	UNICOM 122.8 (CTAF) 0
------------------------	---------------------------------------	---------------------------------

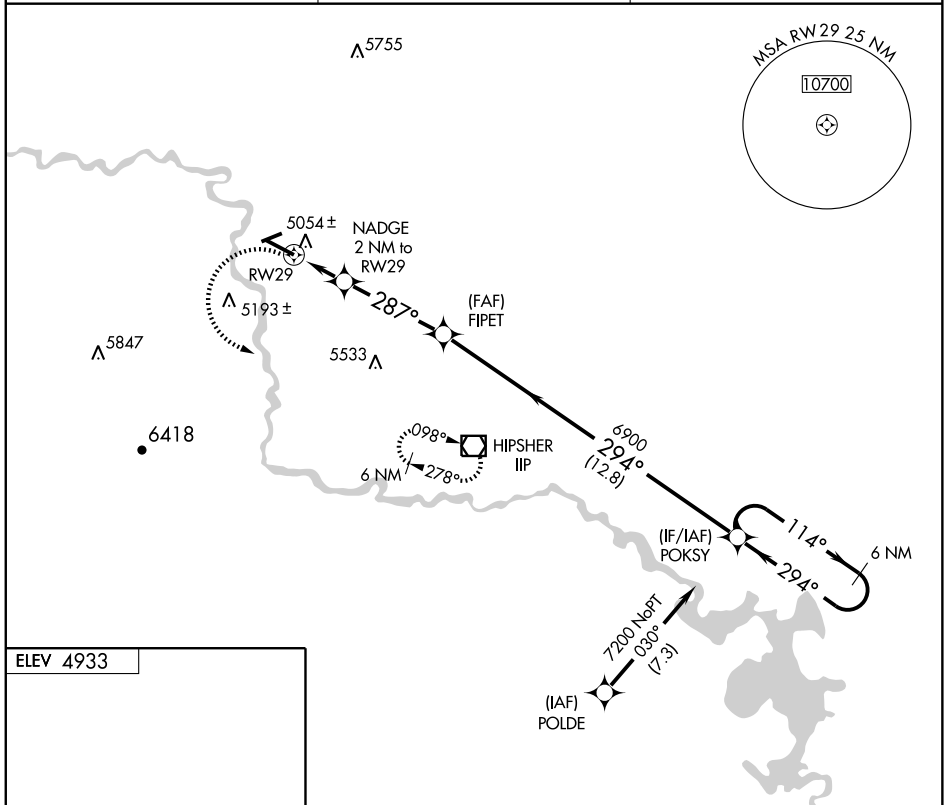

ELEV 4933

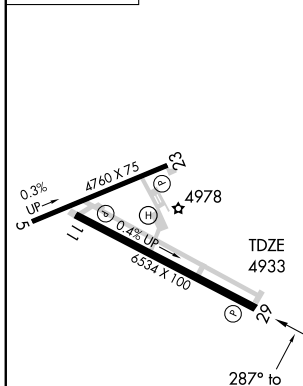

REIL Rwy 29 0
MIRL Rwys 11-29 and 5-23 0

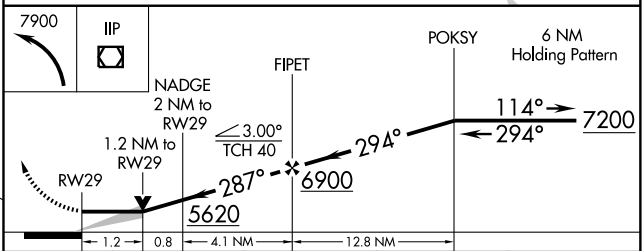

CATEGORY	A	B	C	D
LNVA MDA	5360-1	427 (500-1)	5360-1¼ 427 (500-1¼)	5360-1½ 427 (500-1½)
CIRCLING	5520-1	587 (600-1)	5520-1½ 587 (600-1½)	5540-2 607 (700-2)



VOR/DME IIP 108.6 Chan 23	APP CRS 305°	Rwy Idg TDZE Apt Elev	6534 4933 4933
---	------------------------	-----------------------------	---

VOR RWY 29


DOUGLAS / CONVERSE COUNTY (DGW)

	MISSED APPROACH: Climbing right turn to 8000 via heading 160° and IIP VOR/DME R-326 to IIP VOR/DME and hold, continue climb-in-hold to 8000.
---	---

ASOS 135.225	DENVER CENTER 135.6 363.025	UNICOM 122.8 (CTAF) 0
------------------------	---------------------------------------	---------------------------------

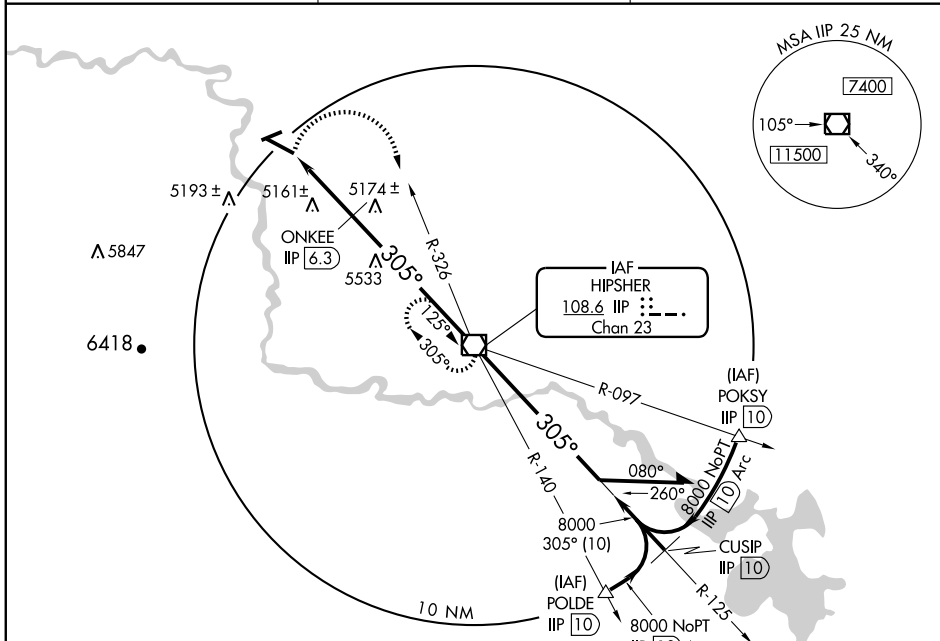


ELEV 4933

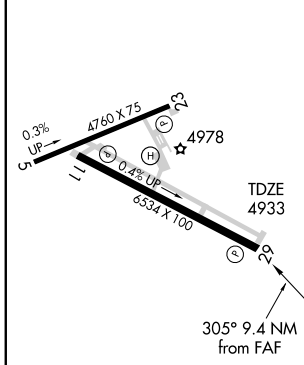

REIL Rwy 29 0

MIRL Rwys 11-29 and 5-23 0

FAF to MAP 9.4 NM					
Knots	60	90	120	150	180
Min:Sec	9:24	6:16	4:42	3:46	3:08

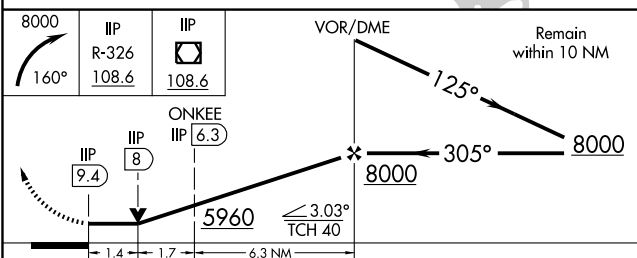

CATEGORY	A		B		C		D	
	5960-1¼ 1027 (1100-1¼)	5960-1½ 1027 (1100-1½)	5960-1¼ 1027 (1100-1¼)	5960-1½ 1027 (1100-1½)	5960-3	1027 (1100-3)	5960-3	1027 (1100-3)
S-29	5960-1¼ 1027 (1100-1¼)	5960-1½ 1027 (1100-1½)	5960-1¼ 1027 (1100-1¼)	5960-1½ 1027 (1100-1½)	5960-3	1027 (1100-3)	5960-3	1027 (1100-3)
ONKEE FIX MINIMUMS								
S-29	5420-1	487 (500-1)	5420-1¼	487 (500-1¼)	5420-1½	487 (500-1½)	5420-1½	487 (500-1½)
CIRCLING	5520-1	587 (600-1)	5520-1½	587 (600-1½)	5540-2	607 (700-2)	5540-2	607 (700-2)

ILS or LOC/DME RWY 23

EVANSTON-UINTA COUNTY BURNS FIELD (E V W)

LOC/DME I-EVW 108.9 Chan 26	APP CRS 234°	Rwy Idg TDZE Apt Elev	7300 7143 7143
---	------------------------	-----------------------------	---




⚠ For inoperative MALS, increase S-LOC 23
⚠ Cat D visibility to 1 mile. When local altimeter setting not received, procedure NA.



MISSED APPROACH: Climb to 7600 then climbing left turn to 12000 via EVW VOR/DME R-213 to COOLI/VOR VOR/DME 16.6 DME and hold, continue climb-in-hold to 12000.

ASOS 120.0	SALT LAKE CENTER 127.7 354.125	GCO 121.72	UNICOM 123.0 (CTAF) 1
----------------------	--	----------------------	--

Procedure NA for arrivals at FBR VOR/DME via airway radials 213 CW 285.

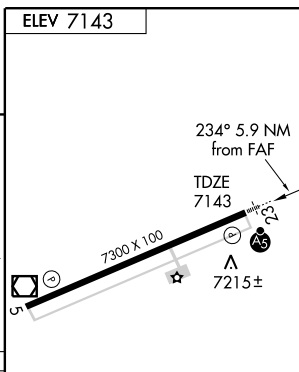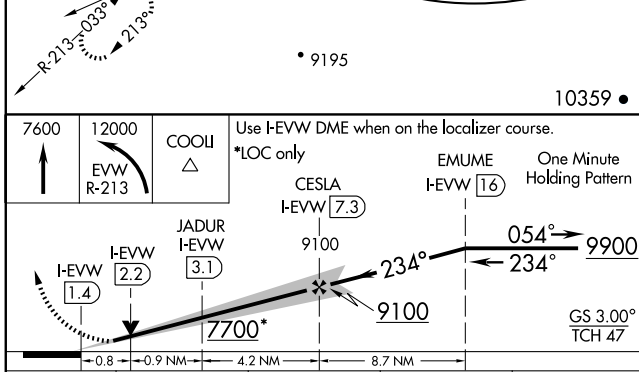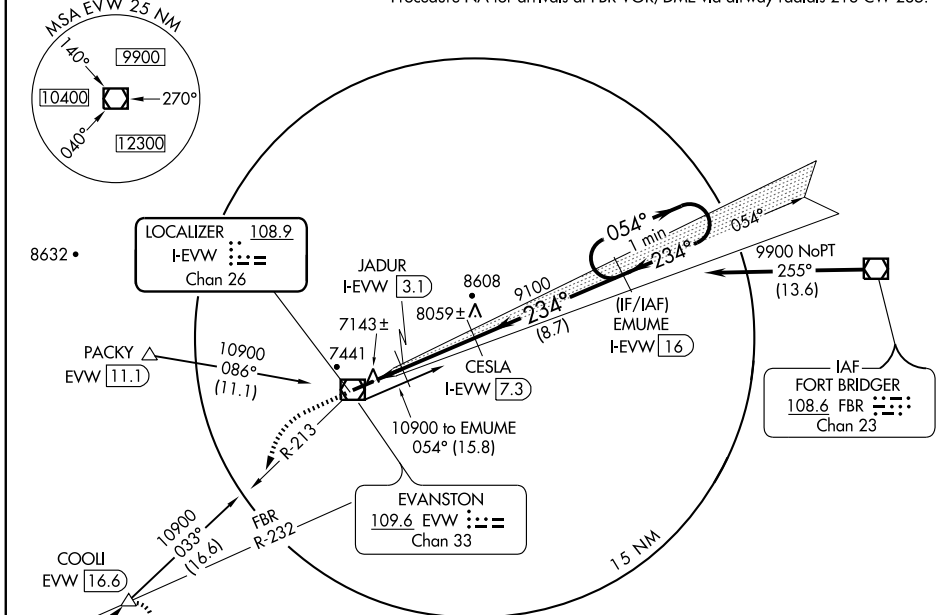

CATEGORY	A	B	C	D
S-ILS 23	7343-1/2 200 (200-1/2)			
S-LOC 23	7440-1/2 297 (300-1/2)			7440-3/4 297 (300-3/4)
CIRCLING	7580-1 437 (500-1)	7720-1 577 (600-1)	7760-1 3/4 617 (700-1 3/4)	7760-2 617 (700-2)

REIL Rwy 5 and 23 **1**
 HIRL Rwy 5-23 **1**

RNAV (GPS) RWY 5



EVANSTON-UINTA COUNTY BURNS FIELD (E V W)

WAAS CH 78302 W05A	APP CRS 054°	Rwy Idg TDZE Apt Elev	7300 7141 7143
--	------------------------	-----------------------------	---

▼ If local altimeter setting not received, procedure NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV
NA below -29°C (-20°F) or above 34°C (94°F).
DME/DME RNP-0,3 NA.

MISSED APPROACH: Climb to 12000 direct JADUR
and via 075° track to EXILE and hold, continue
climb-in-hold to 12000.

ASOS 120.0	SALT LAKE CENTER 127.7 354.125	GCO 121.72	UNICOM 123.0 (CTAF)
----------------------	--	----------------------	-------------------------------

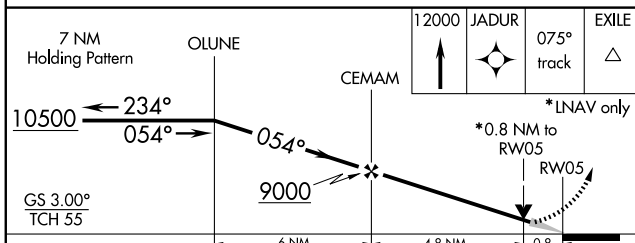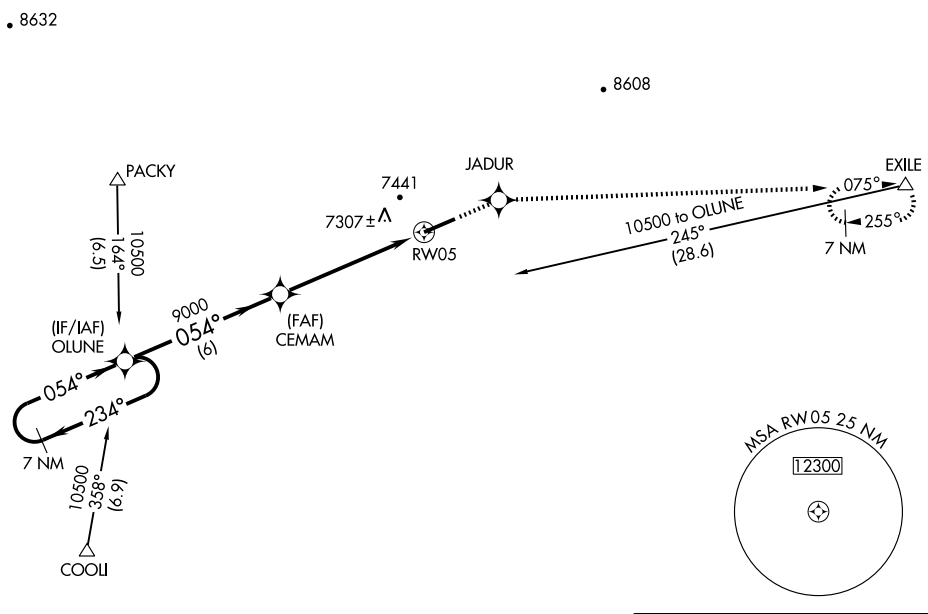

ELEV 7143	7300 X 100	7215±
-----------	------------	-------

TDZE 7141 054° to RW05

REIL Rwy 5 and 23
 HIRL Rwy 5-23

CATEGORY	A	B	C	D
LPV DA		7391-3/4	250 (300-3/4)	
LNAV/VNAV DA		7643-13/4	502 (500-13/4)	
LNAV MDA		7440-1	299 (300-1)	
CIRCLING	7580-13/4 437 (500-13/4)	7720-13/4 577 (600-13/4)	7760-13/4 617 (700-13/4)	7760-2 617 (700-2)

RNAV (GPS) RWY 23

EVANSTON-UINTA COUNTY BURNS FIELD (E V W)

WAAS CH 77905 W23A	APP CRS 234°	Rwy Idg TDZE Apt Elev	7300 7143 7143
--	------------------------	-----------------------------	---

For inoperative MALS, increase LPV all Cats. visibility to 1, LNAV/VNAV Cat. D to 1 and LNAV Cat. D to 1¼. When local altimeter setting not received, procedure NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -29°C (-20°F) or above 34°C (93°F). DME/DME RNP-0.3 NA.





MALS



MISSED APPROACH: Climb to 12000 direct SOLNE and via 212° track to COOLI and hold, continue climb-in-hold to 12000.

ASOS 120.0	SALT LAKE CENTER 127.7 354.125	GCO 121.72	UNICOM 123.0 (CTAF)
----------------------	--	----------------------	-------------------------------

Procedure NA for arrivals at FBR VOR/DME via airway radials 213 CW 285.

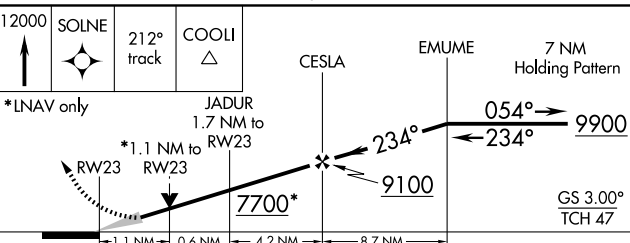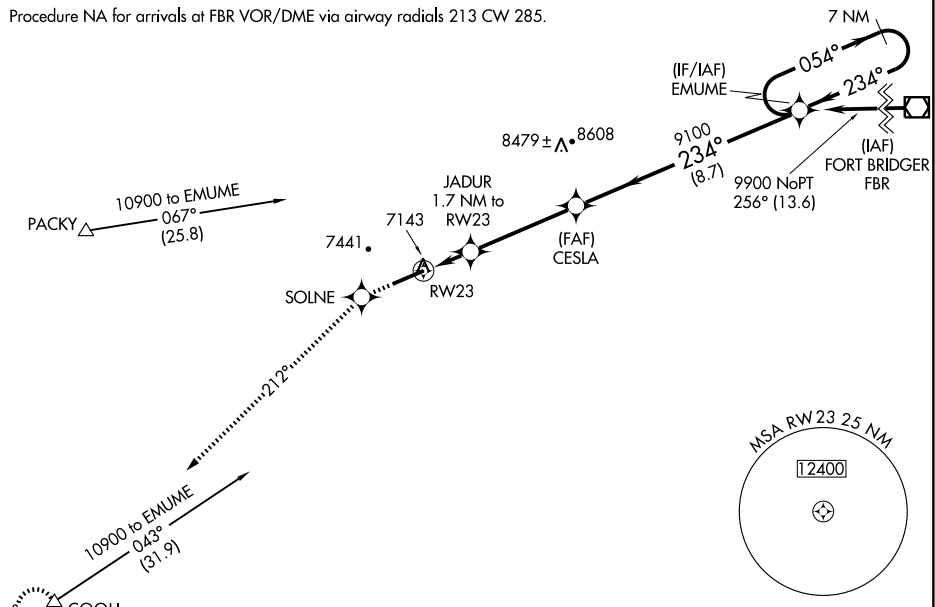

CATEGORY	A	B	C	D
LPV DA	7393-½		250 (300-½)	
LNAV/VNAV DA	7443-½		300 (300-½)	
LNAV MDA	7520-½		377 (400-½)	
CIRCLING	7580-1 437 (500-1)	7720-1 577 (600-1)	7760-1¾ 617 (700-1¾)	7443-¾ 300 (300-¾) 7520-1 377 (400-1) 7760-2 617 (700-2)

REIL Rwy 5 and 23
HIRL Rwy 5-23

VOR/DME RWY 5

EVANSTON-UINTA COUNTY BURNS FIELD (E V W)

VOR/DME EVW 109.6 Chan 33	APP CRS 044°	Rwy Idg TDZE Apt Elev	7300 7141 7143
---	------------------------	-----------------------------	---

If local altimeter setting not received, procedure NA.




MISSED APPROACH: Climb to 7600, then climbing right turn to 10600 via heading 255° and EVW VOR/DME R-224 to NAGNE/11.1 DME and hold, continue climb-in-hold to 10600.

ASOS
120.0

SALT LAKE CENTER
127.7 354.125

GCO
121.72

UNICOM
123.0 (CTAF) **0**

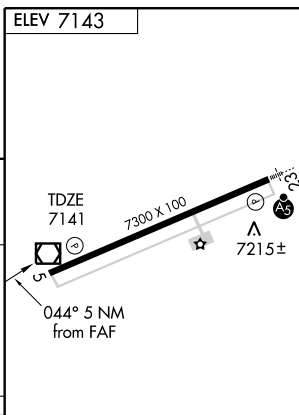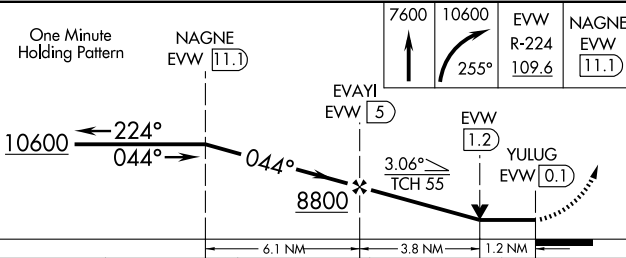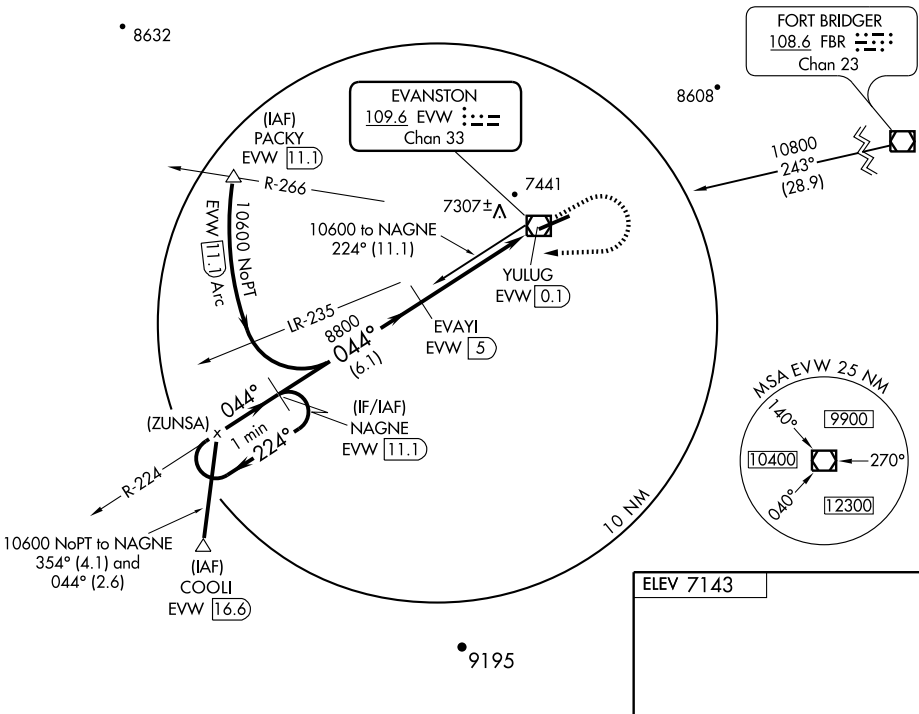

CATEGORY	A	B	C	D
S-5	7560-1	419 (500-1)	7560-1¼	419 (500-1¼)
CIRCLING	7580-1 437 (500-1)	7720-1 577 (600-1)	7760-1¾ 617 (700-1¾)	7760-2 617 (700-2)

REIL Rwy 5 and 23 **0**
HIRL Rwy 5-23 **0**

VOR/DME RWY 23

EVANSTON-UINTA COUNTY BURNS FIELD (E/VW)

VOR/DME EVW 109.6 Chan 33	APP CRS 237°	Rwy Idg TDZE Apt Elev 7300 7143 7143
---	------------------------	--


For inoperative MALS, increase S-23 Cat. D visibility to 1½ mile.
If local altimeter setting not received, procedure NA.



MISSED APPROACH: Climb to 7600 then climbing left turn to 12000 via EVW VOR/DME R-213 to COOLI/16.6 DME and hold, continue climb-in-hold to 12000.

ASOS 120.0	SALT LAKE CENTER 127.7 354.125	GCO 121.72	UNICOM 123.0 (CTAF) 0
----------------------	--	----------------------	--

Procedure NA for arrivals at FBR VOR/DME via airway radials 213 CW 285.

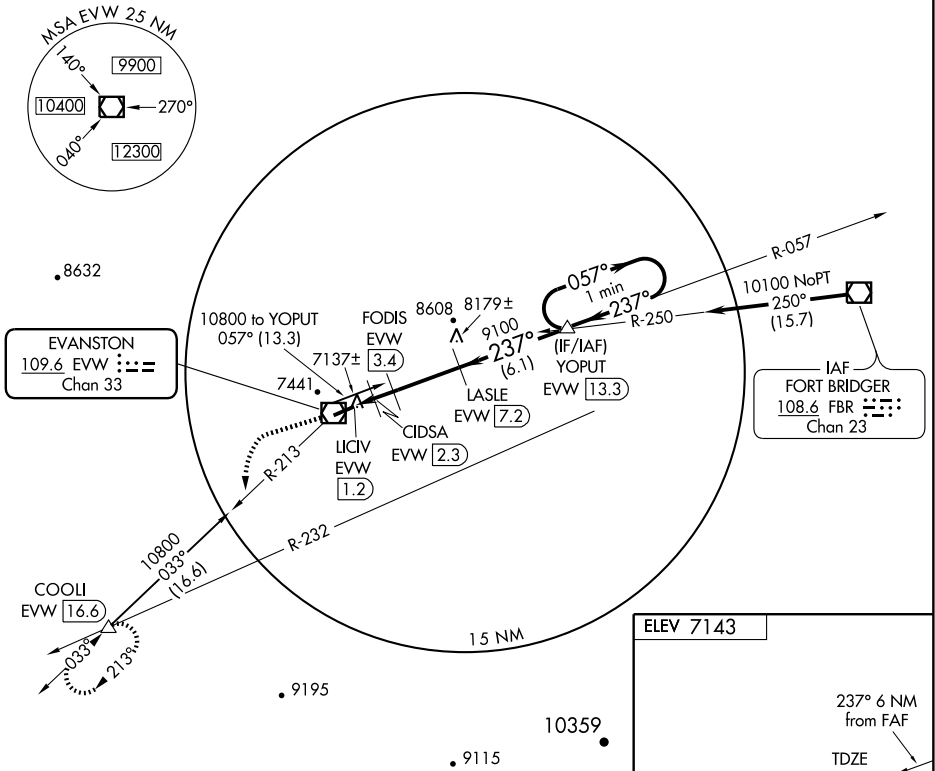

REIL Rwy 5 and 23 **0**
HIRL Rwy 5-23 **0**

RNAV (GPS) RWY 22

FORT BRIDGER (FBR)

APP CRS	Rwy Idg	6402
221°	TDZE	7018
	Apt Elev	7034




NA GPS or RNP 0.3 required.
DME/DME RNP 0.3 NA

MISSED APPROACH: Climbing right turn to 12000 direct EXILE WP and hold.

AWOS-2
118.8

CASPER RADIO
122.3

UNICOM
122.8 (CTAF)

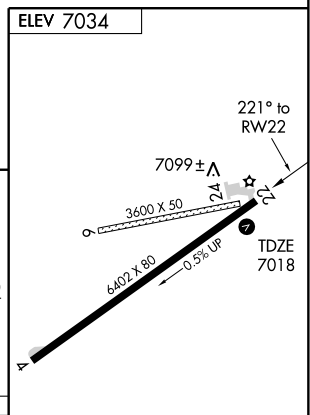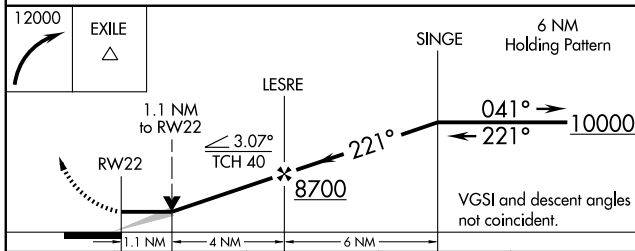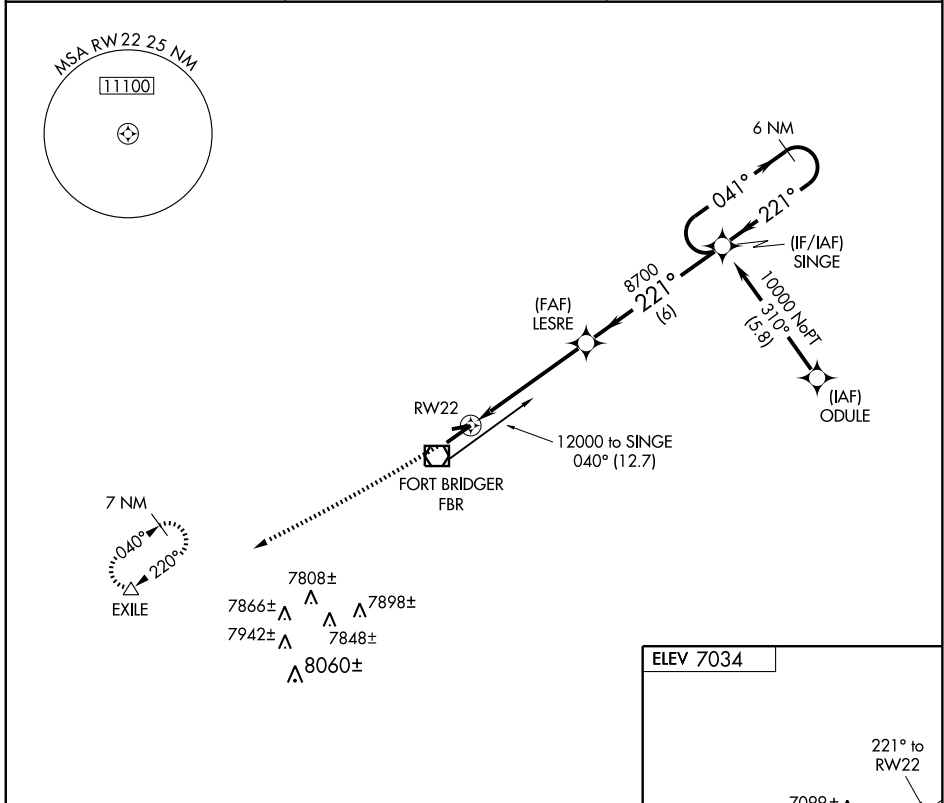

CATEGORY	A	B	C	D
LNAV MDA	7360-1 342 (400-1)			7360-1 1/4 342 (400-1 1/4)
CIRCLING	7480-1 446 (500-1)	7500-1 466 (500-1)	7500-1 1/2 466 (500-1 1/2)	7600-2 566 (600-2)

REIL Rwy 22
MIRL Rwy 4-22

VOR RWY 22

FORT BRIDGER (FBR)

VOR/DME FBR 108.6 Chan 23	APP CRS 215°	Rwy Idg TDZE Apt Elev 6402 7018 7034
--	------------------------	--





NA If local altimeter setting not received, procedure NA.

MISSED APPROACH: Climbing right turn to 9000 in FBR VOR/DME holding pattern.

AWOS-2
118.8

CASPER RADIO
122.3

UNICOM
122.8 (CTAF)

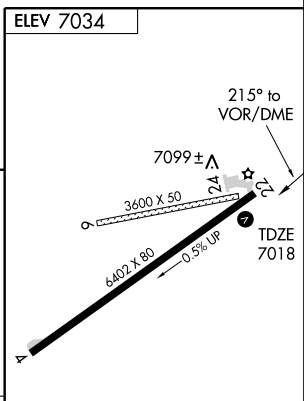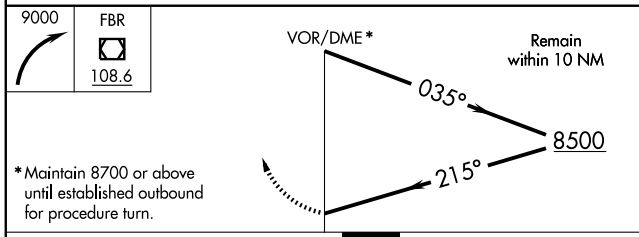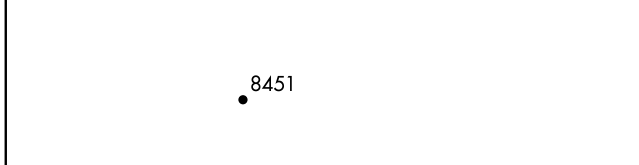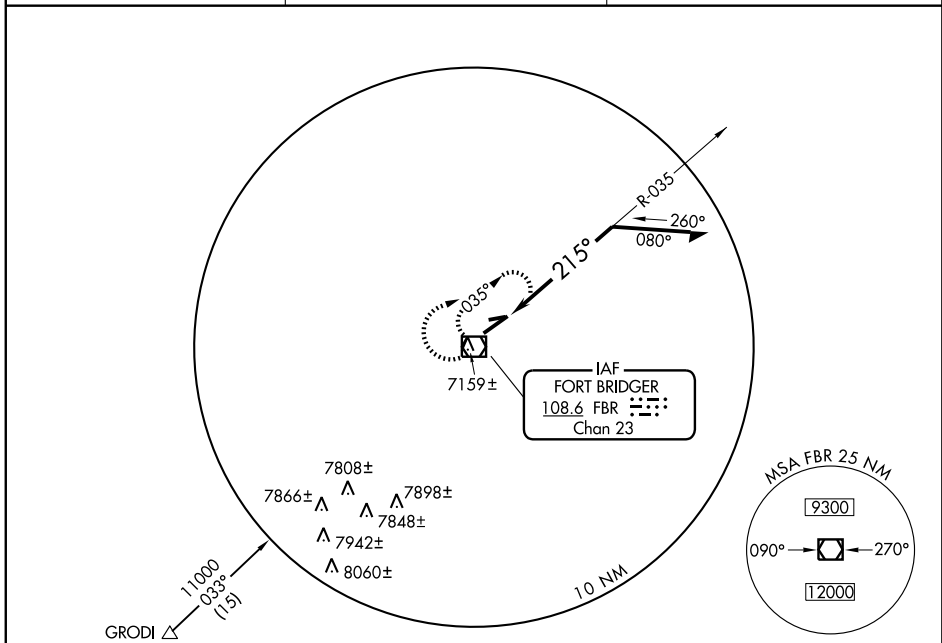

CATEGORY	A	B	C	D
S-22	7440-1	422 (500-1)	7440-1 ¼	422 (500-1 ¼)
CIRCLING	7480-1 446 (500-1)	7500-1 466 (500-1)	7500-1 ½ 466 (500-1 ½)	7600-2 566 (600-2)


REIL Rwy 22
MIRL Rwy 4-22

ILS or LOC RWY 34




GILLETTE-CAMPBELL COUNTY (GCC)

LOC/DME I-LLT 110.1 Chan 38	APP CRS 338°	Rwy Idg TDZE Apt Elev	7500 4365 4365
---	------------------------	-----------------------------	---

▼ For inoperative MALS/R, increase S-LOC Cat A, and GILYE FIX MINIMUMS S-LOC Cat A/B visibilities to 1.
▲ Inoperative table does not apply to S-ILS 34.
 When VGSI inoperative, circling Rwy 3 NA at night.
 If local altimeter setting not received, procedure NA.
 ADF or DME required.

MALS/R

MISSED APPROACH: Climb to 5700 then climbing left turn to 7000 via heading 150° and GCC VOR/DME R-290 to GCC VOR/DME and hold, continue climb-in-hold to 7000.

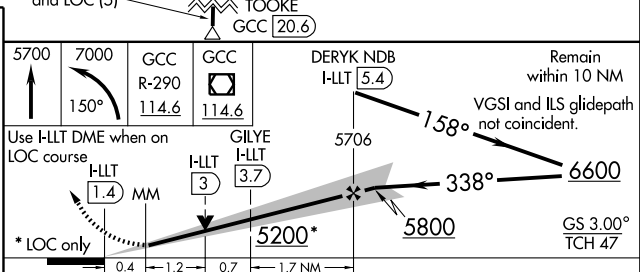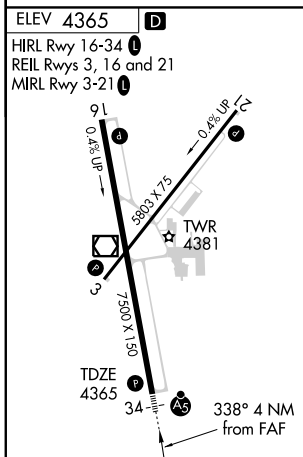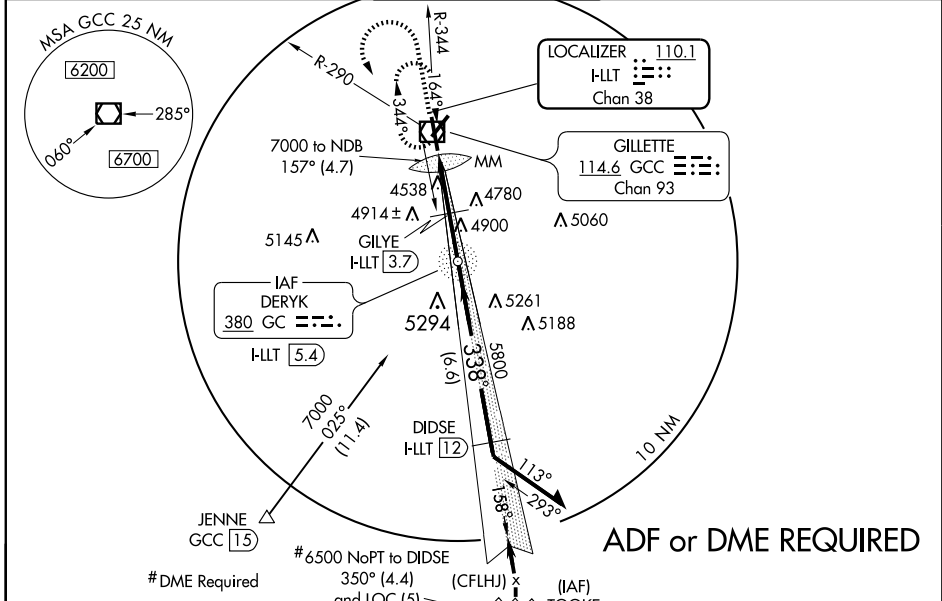ASOS 124.175	DENVER CENTER 135.6 363.025	GILLETTE TOWER* 118.5 (CTAF) 0	GND CON 121.7	UNICOM 122.95
------------------------	---------------------------------------	---	-------------------------	-------------------------



CATEGORY	A	B	C	D
S-ILS 34	4565- ³ / ₄ 200 (200- ³ / ₄)			
S-LOC 34	5200- ³ / ₄	835 (900- ³ / ₄)	5200-2 835 (900-2)	5200-2 ¹ / ₄ 835 (900-2 ¹ / ₄)
CIRCLING	5200-1 835 (900-1)	5200-1 ¹ / ₄ 835 (900-1 ¹ / ₄)	5200-2 ¹ / ₂ 835 (900-2 ¹ / ₂)	5280-3 915 (1000-3)
GILYE FIX MINIMUMS				
S-LOC 34	4940- ³ / ₄	575 (600- ³ / ₄)	4940-1 575 (600-1)	4940-1 ¹ / ₄ 575 (600-1 ¹ / ₄)
CIRCLING	5040-1	675 (700-1)	5120-2 ¹ / ₄ 755 (800-2 ¹ / ₄)	5280-3 915 (1000-3)

NW-1, 08 APR 2010 to 06 MAY 2010

RNAV (GPS) RWY 16





GILLETTE-CAMPBELL COUNTY (GCC)

WAAS CH 86221 W16A	APP CRS 158°	Rwy Idg TDZE 4337 Apt Elev 4365
--	------------------------	---

⚠ DME/DME RNP-0.3 NA. Baro-VNAV NA below -23°C (-9°F).
⚠ If local altimeter setting not received, procedure NA.
 When VGSI inoperative, circling Rwy 3 NA at night.

MISSED APPROACH: Climb to 7000 direct IDIPE and via 161° track to JUGIP and hold.

ASOS 124.175	DENVER CENTER 135.6 363.025	GILLETTE TOWER * 118.5 (CTAF) 📻	GND CON 121.7	UNICOM 122.95
------------------------	---------------------------------------	--	-------------------------	-------------------------

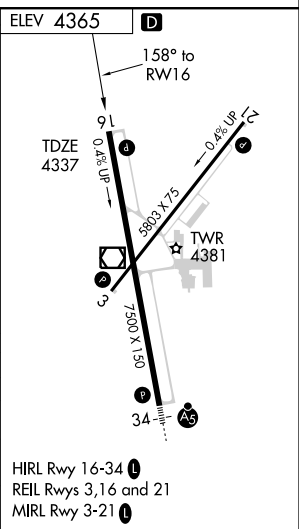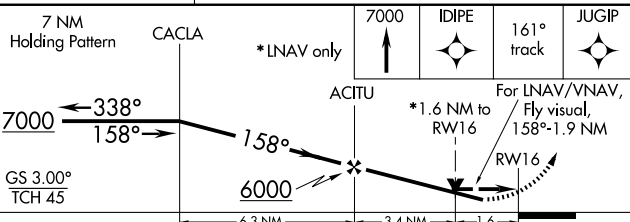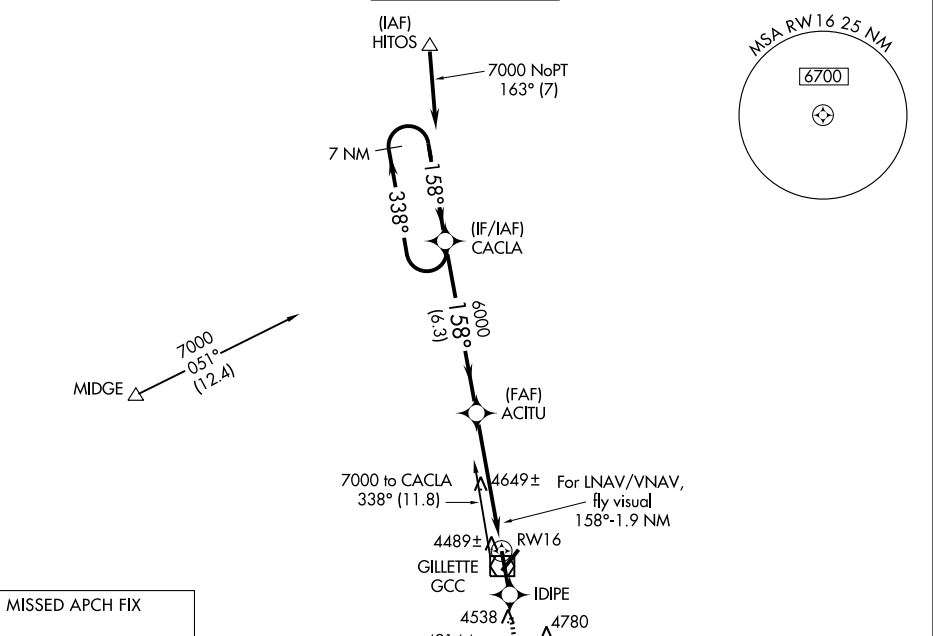

CATEGORY	A	B	C	D
LPV DA	4660-1¼		323 (300-1¼)	
LNAV/VNAV DA	4980-2		643 (700-2)	
LNAV MDA	4900-1 563 (600-1)		4900-1½ 563 (600-1½)	
CIRCLING	5040-2¼ 675 (700-2¼)		5120-2¼ 755 (800-2¼)	
			5280-3 915 (1000-3)	

HIRL Rwy 16-34 **📻**
 REIL Rwys 3, 16 and 21
 MIRL Rwy 3-21 **📻**

RNAV (GPS) RWY 34



GILLETTE-CAMPBELL COUNTY (GCC)

WAAS CH 86204 W34A	APP CRS 338°	Rwy Idg TDZE Apt Elev	7500 4365 4365
--	------------------------	-----------------------------	---

MALSR
MISSED APPROACH: Climb to 7000 direct ACITU and via 261° track to MIDGE and hold.

▼ Inoperative table does not apply to LPV and LNAV/VNAV. For inoperative MALSR, increase LNAV Cat A visibility to 1. When VGSI inoperative, Circling Rwy 3 NA at night. If local altimeter setting not received, procedure NA. DME/DME RNP-0.3 NA. Baro-VNAV NA below -23°C (-9°F)

ASOS 124.175	DENVER CENTER 135.6 363.025	GILLETTE TOWER* 118.5 (CTAF)	GND CON 121.7	UNICOM 122.95
------------------------	---------------------------------------	--	-------------------------	-------------------------

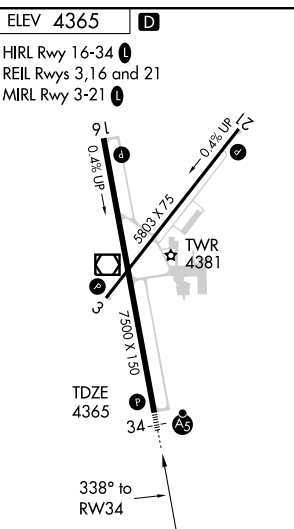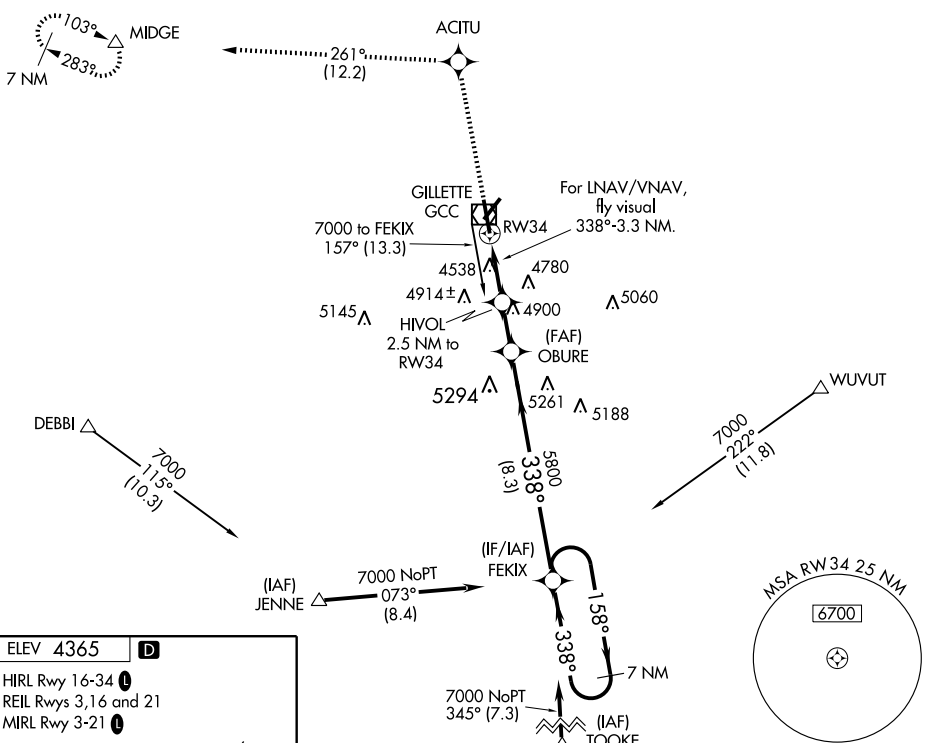

7000	ACITU	261° track	MIDGE	VGSI and RNAV glidepath not coincident	7 NM Holding Pattern
↑	◆	—	△		FEKIX
For LNAV/VNAV, fly visual 338°-3.3 NM		HIBOL 2.5 NM to RWY 34	OBURE		
				158°	7000
				338°	5800
				338°	5200
					GS 3.00° TCH 52
					2.5 NM 1.8 NM 8.3 NM
CATEGORY	A	B	C	D	
LPV DA		4620-3/4	255 (300-3/4)		
LNAV/VNAV DA	5480-2	1115 (1200-2)	5480-3	1115 (1200-3)	
LNAV MDA	5120-3/4	755 (800-3/4)	5120-1 3/4	755 (800-1 3/4)	5120-2
					755 (800-2)
CIRCLING		5480-4	1115 (1200-4)		

VOR/DME RWY 16




GILLETTE-CAMPBELL COUNTY (GCC)

VOR/DME GCC 114.6 Chan 93	APP CRS 158°	Rwy Idg TDZE Apt Elev	7500 4337 4365
---	------------------------	-----------------------------	---

▼ Visibility reduction by helicopters NA.
▲ If local altimeter setting not received, procedure NA.
 When VGSI inoperative, circling Rwy 3 NA at night.

MISSED APPROACH: Climbing left turn to 7000 via heading 308° and GCC R-338 to ODECA/14.5 DME and hold.

ASOS 124.175	DENVER CENTER 135.6 363.025	GILLETTE TOWER * 118.5 (CTAF) 0	GND CON 121.7	UNICOM 122.95
------------------------	---------------------------------------	---	-------------------------	-------------------------

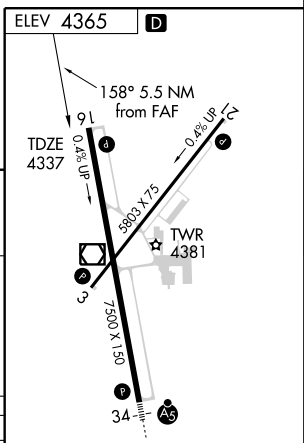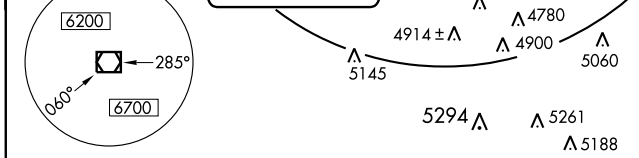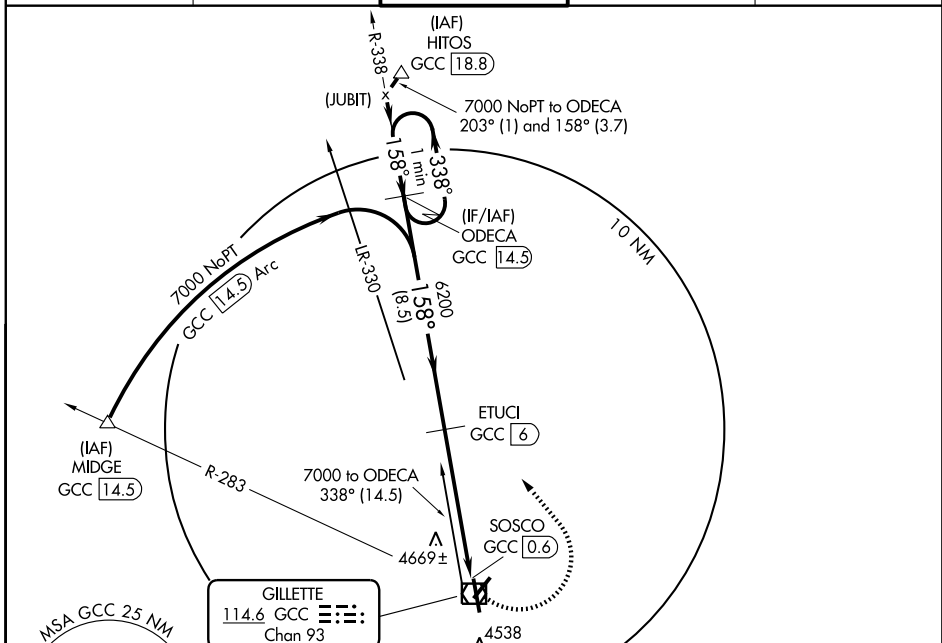

CATEGORY	A	B	C	D
S-16	4920-1	583 (600-1)	4920-1½ 583 (600-1½)	4920-1¾ 583 (600-1¾)
CIRCLING	5040-1	675 (700-1)	5120-2¼ 755 (800-2¼)	5280-3 915 (1000-3)

HIRL Rwy 16-34
 REIL Rwys 3, 16 and 21
 MIRL Rwy 3-21

VOR/DME RWY 34




GILLETTE-CAMPBELL COUNTY (GCC)

VOR/DME GCC 114.6 Chan 93	APP CRS 334°	Rwy Idg TDZE Apt Elev	7500 4365 4365
---	------------------------	-----------------------------	---

▲ For inoperative MALS, increase S-34 Cat A visibility to 1.
▲ When VGSI inoperative, Circling Rwy 3 NA at night.
 If local altimeter setting not received, procedure NA.

MALS R-154
 MISSED APPROACH: Climb to 7000 via GCC VOR/DME R-154 to GCC VOR/DME and hold, continue climb-in-hold to 7000.

ASOS 124.175	DENVER CENTER 135.6 363.025	GILLETTE TOWER* 118.5 (CTAF)	GND CON 121.7	UNICOM 122.95
------------------------	---------------------------------------	--	-------------------------	-------------------------

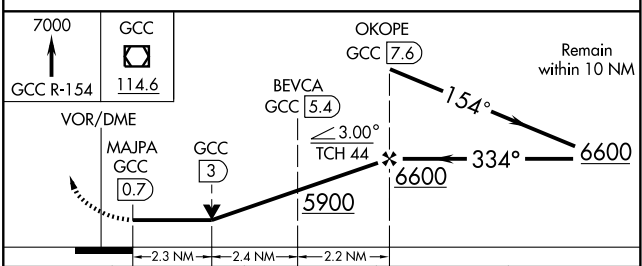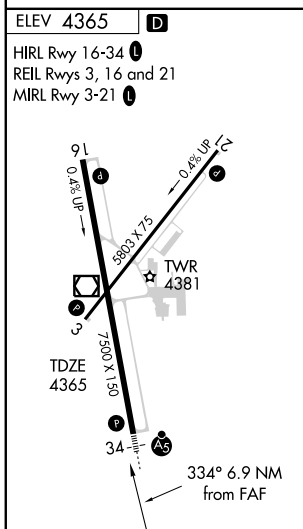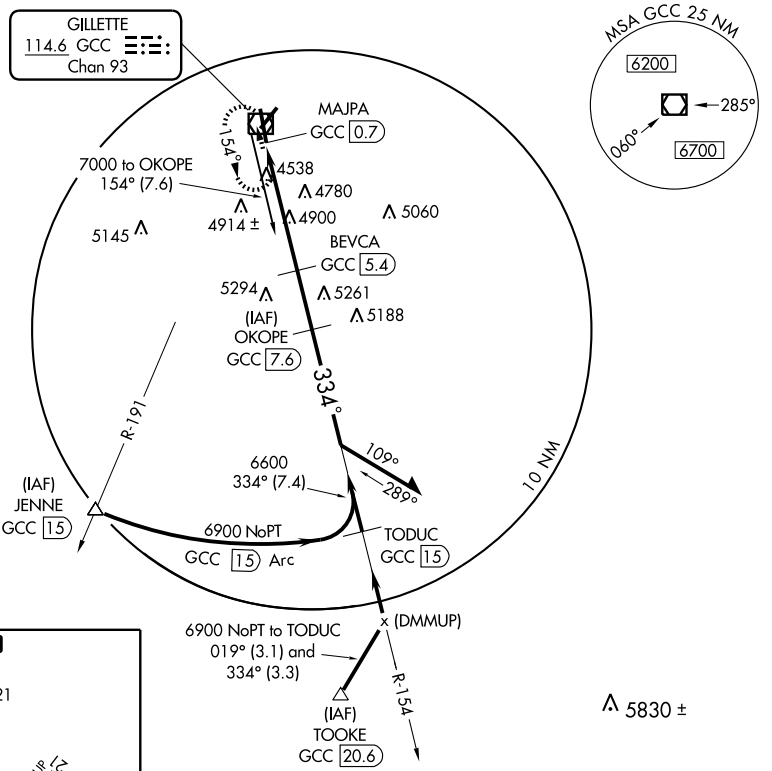

CATEGORY	A	B	C	D
S-34	5200-¾ 835 (900-¾)	5200-2 835 (900-2)	5200-2 835 (900-2)	5200-2¼ 835 (900-2¼)
CIRCLING	5200-1 835 (900-1)	5200-1¼ 835 (900-1¼)	5200-2½ 835 (900-2½)	5280-3 915 (1000-3)

RNAV (GPS)-A




GREYBULL/ SOUTH BIG HORN COUNTY (GEY)

APP CRS	Rwy Idg	N/A
073°	TDZE	N/A
	Apt Elev	3939

⚠ DME/DME RNP -0.3 NA.
 If local altimeter setting not received, use Worland Muni altimeter setting and increase all MDAs 120 feet.
 Circling to Rwy 7/25 NA at night.

MISSED APPROACH: Climbing right turn to 9000 direct CRANY and hold, continue climb-in-hold to 9000.

ASOS 135.325	SALT LAKE CENTER 133.25 285.6	CTAF 122.8
------------------------	---	----------------------

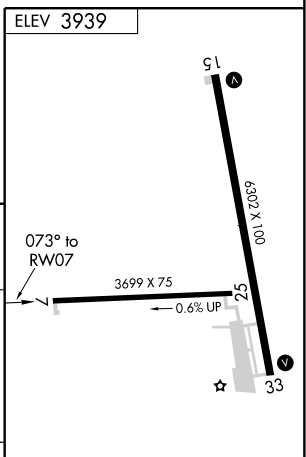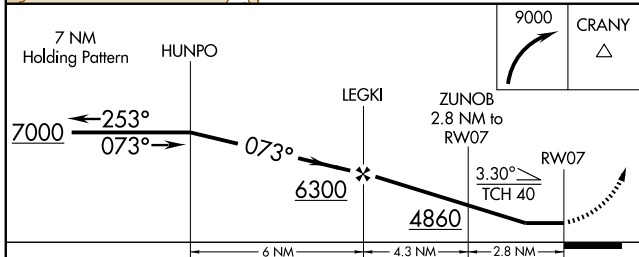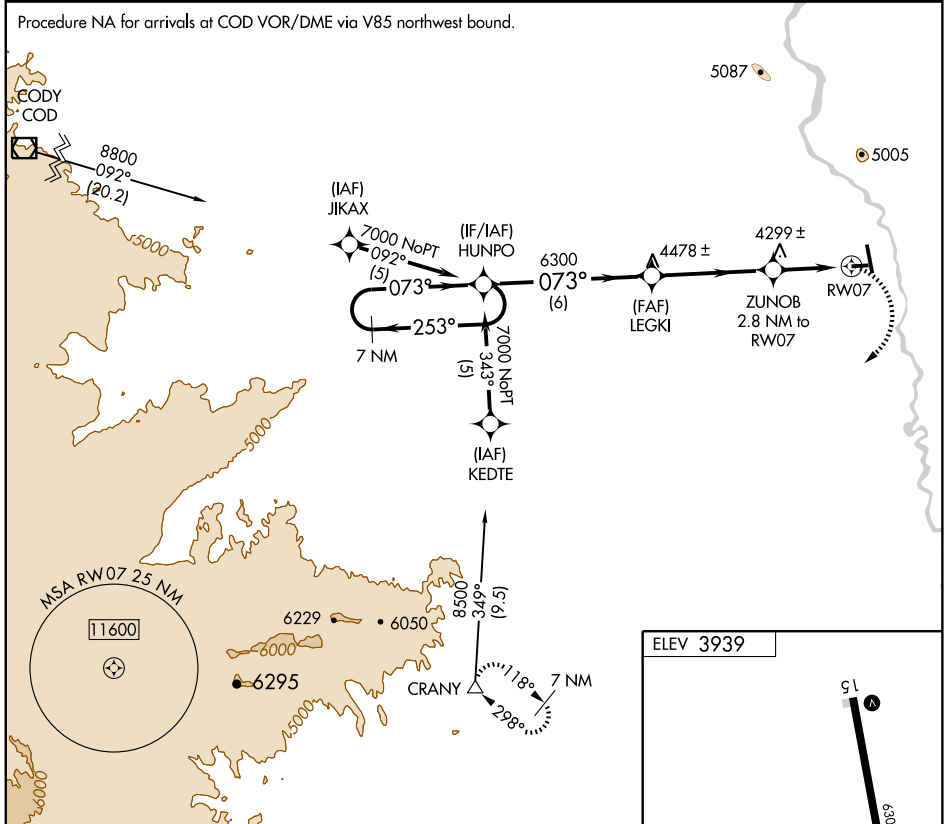

CATEGORY	A	B	C	D
CIRCLING	4560-1 621 (700-1)	4580-1 641 (700-1)	NA	

MRL Rwy 15-33

NW-1. 08 APR 2010 to 06 MAY 2010

RNAV (GPS) RWY 33

GREYBULL/ SOUTH BIG HORN COUNTY (GEY)

APP CRS	Rwy Idg	6302
335°	TDZE	3913
	Apt Elev	3939


DME/DME RNP-0.3 NA. If local altimeter setting not received, use Worland Muni altimeter setting and increase all MDAs 120 feet. VDP NA when using Worland altimeter setting. Circling to Rwy 7/25 NA at night.

MISSED APPROACH: Climbing left turn to 9000 direct CRANY and hold, continue climb-in-hold to 9000.



ASOS
135.325

SALT LAKE CENTER
133.25 285.6

CTAF
122.8

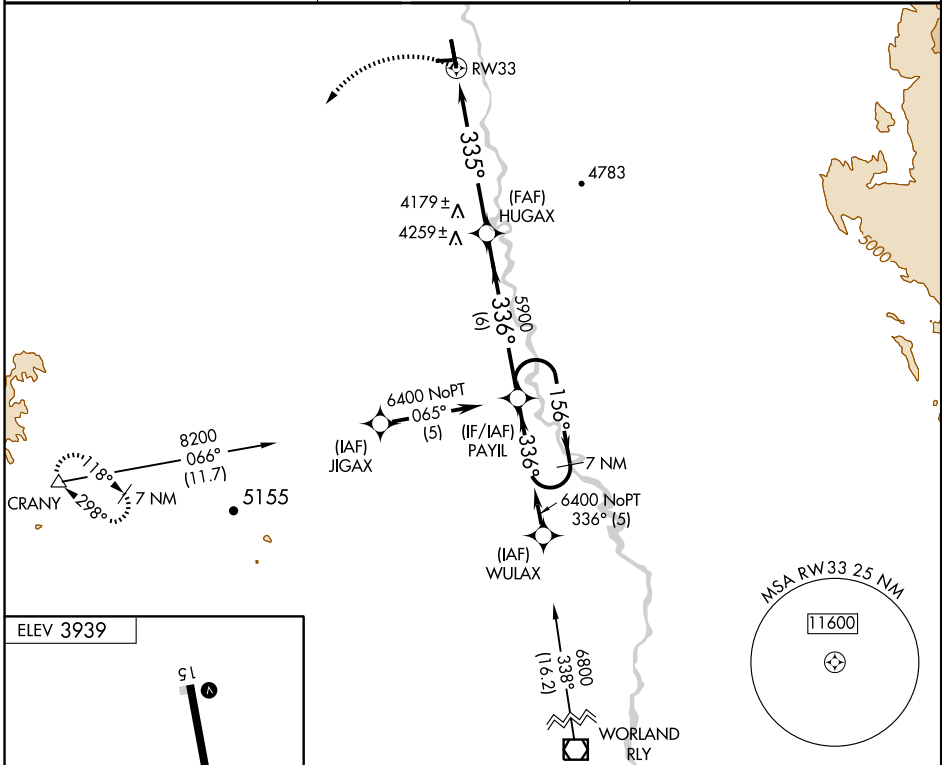

ELEV 3939

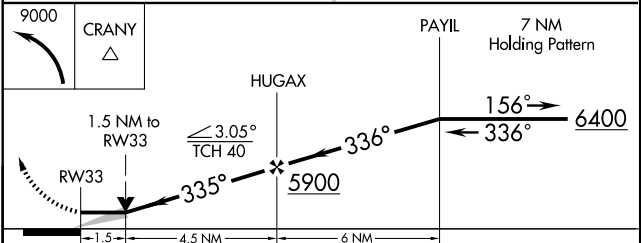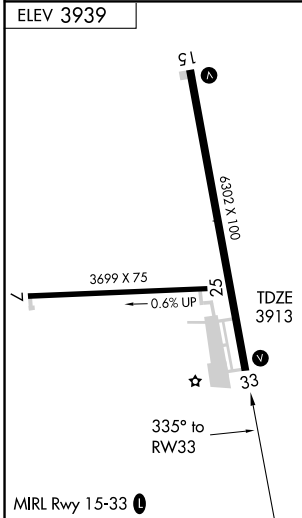

CATEGORY	A	B	C	D
LNVA MDA	4440-1	527 (600-1)	4440-1½ 527 (600-1½)	4440-1¾ 527 (600-1¾)
CIRCLING	4500-1 561 (600-1)	4580-1 641 (700-1)	4660-2 721 (800-2)	5040-3 1101 (1200-3)

GPS RWY 32

GUERNSEY/CAMP GUERNSEY (7V6)



APP CRS	Rwy Idg	5499
321°	TDZE	4374
	Apt Elev	4400

NA Obtain local altimeter setting on UNICOM, when not received use Scottsbluff, NE altimeter setting. Descent angle NA when using Scottsbluff altimeter setting.



MISSED APPROACH: Climb to 5600 then climbing right turn to 8100 direct KACTI WP and hold.

DENVER CENTER
135.6 363.025

UNICOM
122.7 (CTAF) ①

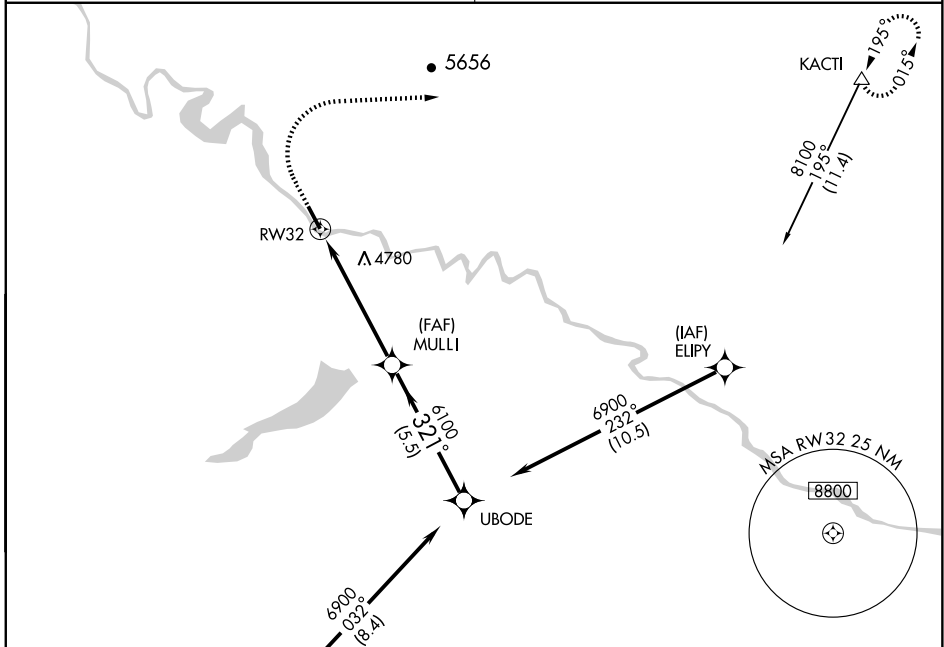


VGSi and descent angles not coincident.

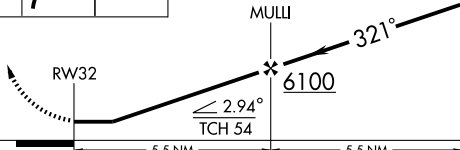

Procedure Turn NA

CATEGORY	A	B	C	D
S-32	5040-1	666 (700-1)	5040-1¾ 666 (700-1¾)	5040-2 666 (700-2)
CIRCLING	5340-1¼ 940 (1000-1¼)	5340-1½ 940 (1000-1½)	5420-3	1020 (1100-3)
SCOTTSBLUFF, NE ALTIMETER SETTING MINIMUMS				
S-32	5240-1	866 (900-1)	5240-2¾	866 (900-2¾)
CIRCLING	5540-1¼ 1140 (1200-1¼)	5540-1½ 1140 (1200-1½)	5620-3	1220 (1300-3)

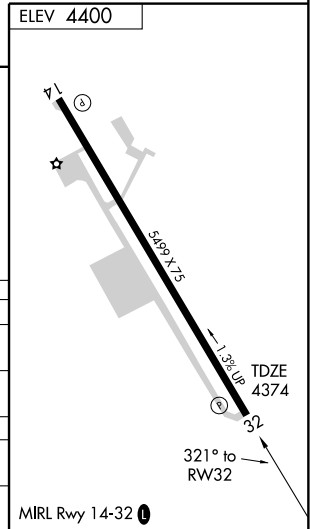

NDB GYZ	APP CRS	Rwy Idg	5499
280	321°	TDZE	4374
		Apt Elev	4400

NDB RWY 32


GUERNSEY/CAMP GUERNSEY (7V6)

▼ When control tower closed obtain local altimeter setting on UNICOM, when not received use Scottsbluff, NE altimeter setting and increase all MDAs 200 feet and increase CATs B and C visibilities 1/4 mile.


MISSED APPROACH: Climb to 5700 then climbing right turn to 7000 direct GYZ NDB and hold.

DENVER CENTER
135.6 363.025


UNICOM
122.7 (CTAF) 0

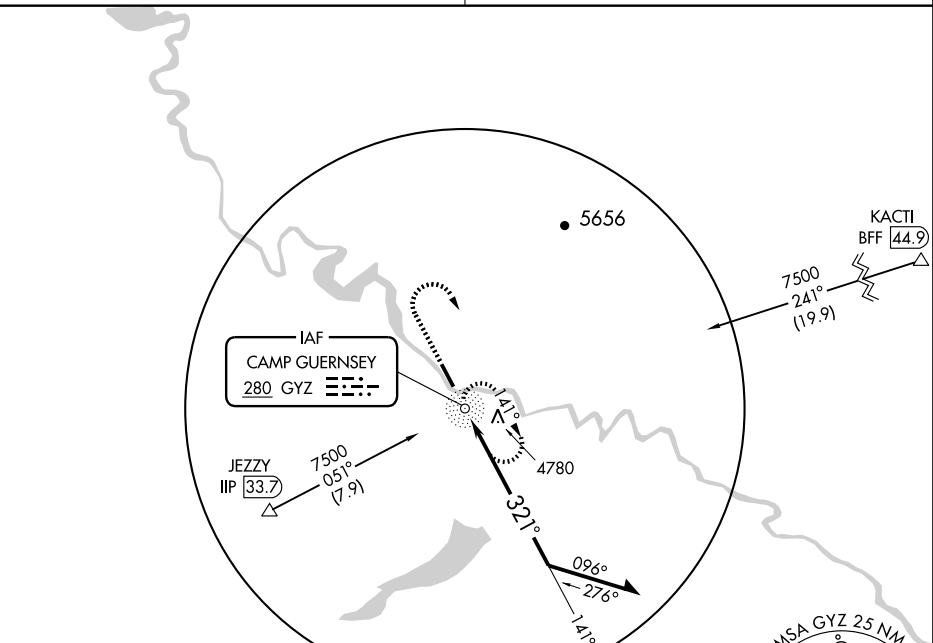

ELEV 4400

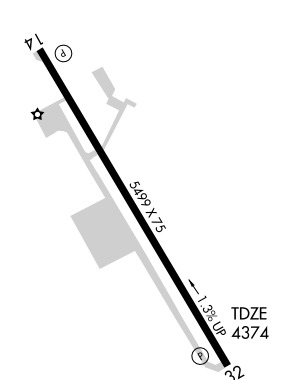

5700	7000	GYZ
↑	↷	280

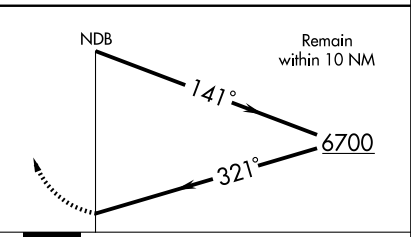

CATEGORY	A	B	C	D
S-32	5280-1¼ 906 (900-1¼)	906 (900-1¼)	5280-2¾ 906 (900-2¾)	5280-3 906 (900-3)
CIRCLING	5340-1¼ 940 (1000-1¼)	5340-1½ 940 (1000-1½)	5420-3	1020 (1100-3)


MIRL Rwy 14-32 0

APP CRS	Rwy Idg	N/A
014°	TDZE	N/A
	Apt Elev	4264



Procedure NA at night. DME/DME RNP-0.3 NA.
NA If local altimeter setting not received, use Gillette altimeter setting and increase all MDAs 120 feet.

MISSED APPROACH: Climbing right turn to 15000 direct KOCYE and hold, continue climb-in-hold to 15000.

AWOS-3 128.755	DENVER CENTER 127.95 338.2	UNICOM 122.8 (CTAF) 0
--------------------------	--------------------------------------	---------------------------------

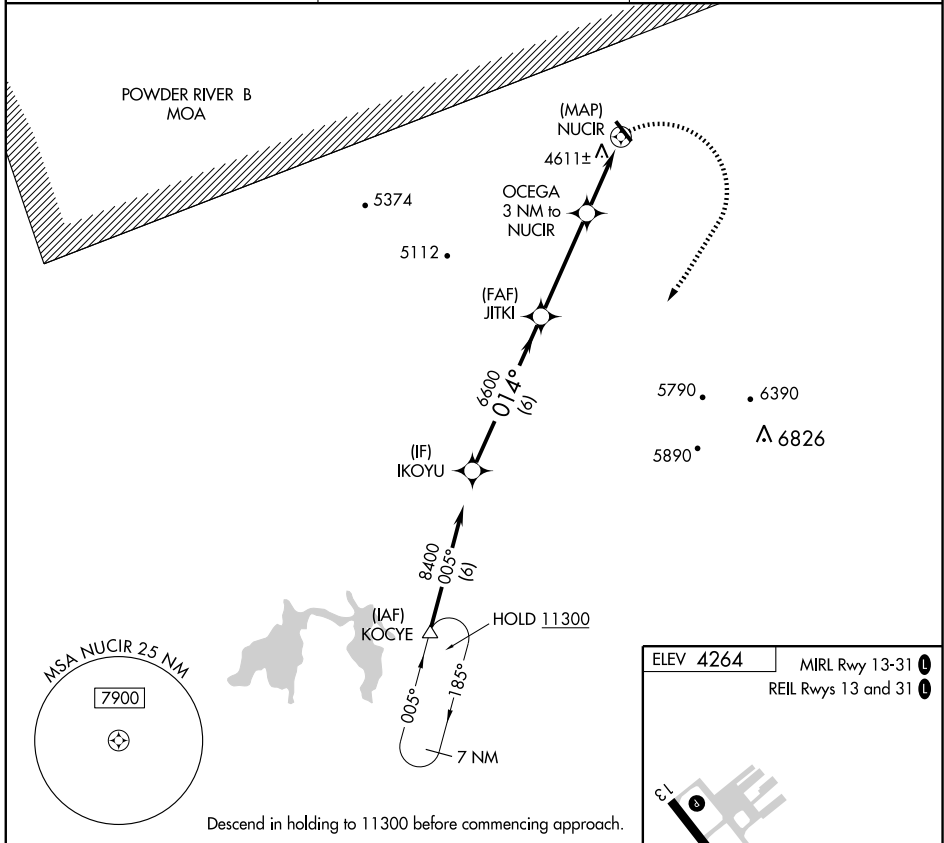

Descend in holding to 11300 before commencing approach.

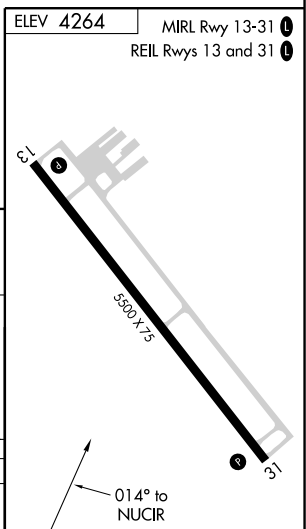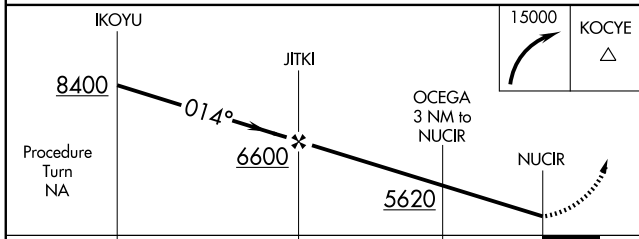

CATEGORY	A	B	C	D
CIRCLING	4920-1 656 (700-1)	5060-1¼ 796 (800-1¼)		NA

AIRPORT DIAGRAM

AL-504 (FAA)

JACKSON HOLE (JAC)
JACKSON, WYOMING

ATIS 120.625
JACKSON TOWER ★
118.075
GND CON
124.55



JANUARY 2005
ANNUAL RATE OF CHANGE
0.1° W

RWY 1-19
S75, D200, ST175, DT380

FIELD
ELEV
6451

61

186.4°

A4

CONTROL
TOWER ★
6506

43°36.5'N

6300 X 150

TERMINAL

HANGARS

006.4°
0.6% UP

43°36'N

ELEV
6413

A1

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS
IS REQUIRED.


110°44.5'W

110°44'W

NW-1, 08 APR 2010 to 06 MAY 2010

GEYSER FOUR DEPARTURE (OBSTACLE)

SALT LAKE CENTER
133.25 285.6
CASPER RADIO
122.05
CTAF
118.075
UNICOM
122.95
AWOS-3 120.625

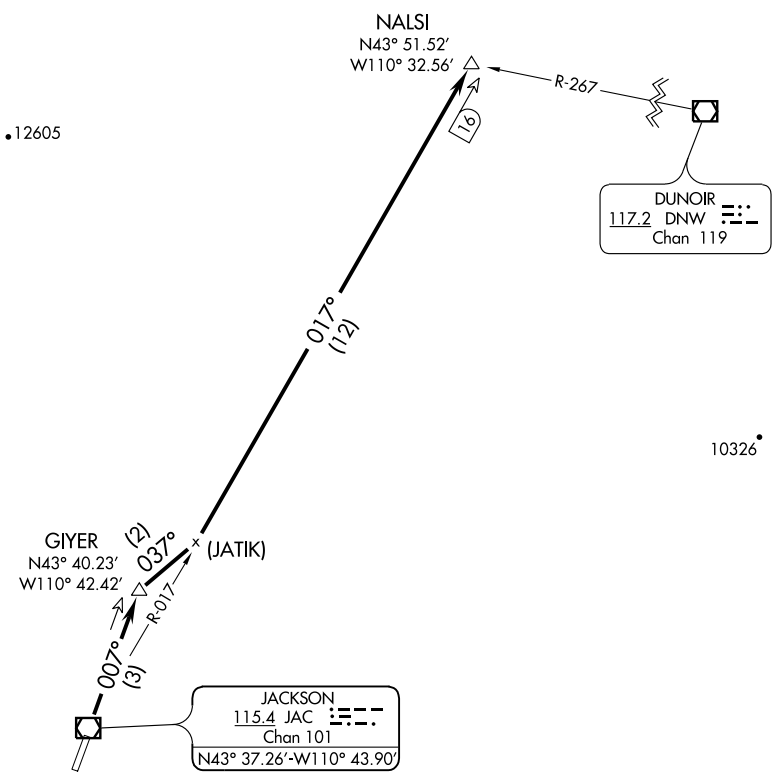

TAKE-OFF MINIMUMS

Rwy 1: Standard with minimum climb of 450' per NM to 14000, or 4400-3 for climb in visual conditions.

Rwy 19: Not authorized - ATC.

• 11239

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 1: Climb to 14000 via JAC R-007 to GIYER/JAC 3 DME, then right turn heading 037° to intercept JAC R-017 to NALSI INT/JAC 16 DME; or for climb visual conditions: Cross JAC VOR/DME northbound at or above 10800 then climb to 14000 via JAC R-017 to NALSI INT/JAC 16 DME.

ILS or LOC Y RWY 19


JACKSON HOLE (JAC)

LOC/DME I-JAC 109.1 Chan 28	APP CRS 187°	Rwy Idg 6300 TDZE 6451 Apt Elev 6451
---	------------------------	---



NA Inoperative table does not apply.
Circling NA east of Rwy 1-19.

MALS
MISSED APPROACH: Climb to 14000 via JAC VOR/DME R-192 to KICNE INT/JAC VOR/DME 26.6 DME and hold, continue climb-in-hold to 14000.

ATIS 120.625	SALT LAKE CENTER 133.25 285.6	JACKSON TOWER* 118.075 (CTAF)	GND CON 124.55	UNICOM 122.95
------------------------	---	---	--------------------------	-------------------------

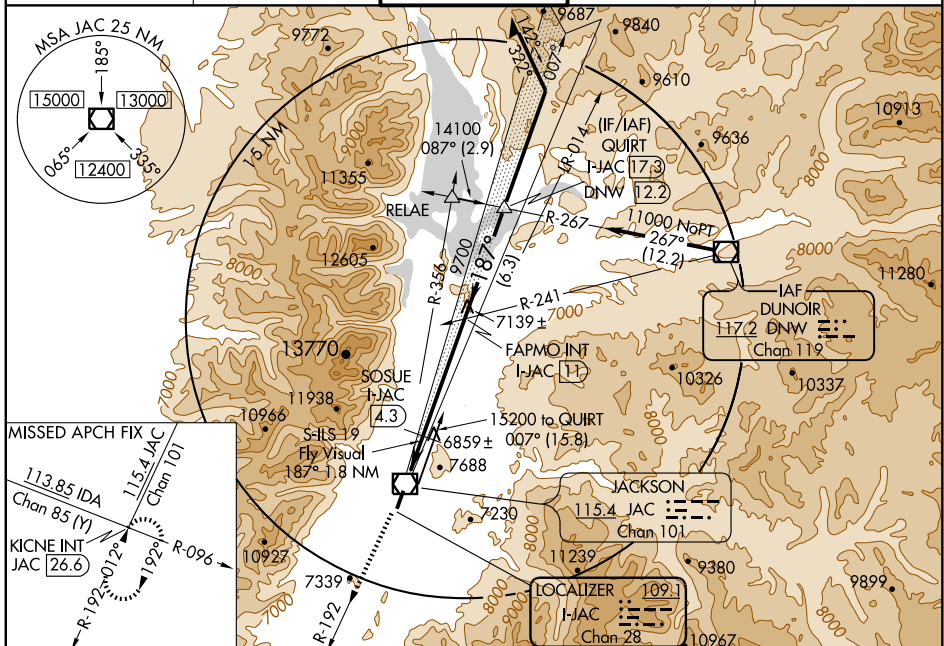

ELEV **6451**

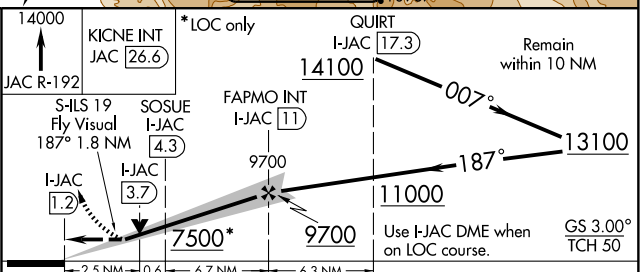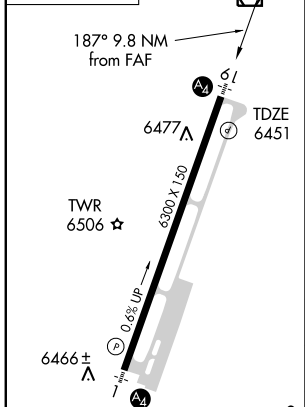

CATEGORY	A	B	C	D
S-ILS 19	7063-2 612 (700-2)			
S-LOC 19	7500-1¼ 1049 (1100-1¼)	7500-1½ 1049 (1100-1½)	7500-3	1049 (1100-3)
CIRCLING	7500-1¼ 1049 (1100-1¼)	7500-1½ 1049 (1100-1½)	7500-3	1049 (1100-3)
SOSUE FIX MINIMUMS				
S-LOC 19	7300-1 849 (900-1)	7300-1¼ 849 (900-1¼)	7300-2½ 849 (900-2½)	7300-2¾ 849 (900-2¾)
CIRCLING	7300-1 849 (900-1)	7300-1¼ 849 (900-1¼)	7300-2½ 849 (900-2½)	7300-2¾ 849 (900-2¾)

FAF to MAP 9.8 NM					
Knots	60	90	120	150	180
Min:Sec	9:48	6:32	4:54	3:55	3:16


ILS or LOC Z RWY 19

JACKSON HOLE (JAC)



LOC/DME I-JAC 109.1 Chan 28	APP CRS 187°	Rwy Idg TDZE Apt Elev	6300 6451 6451
---	------------------------	-----------------------------	---

NA Inoperative table does not apply to S-LOC 19. Circling NA east of Rwy 1-19.	MALS -	MISSED APPROACH: Climb to 14000 via JAC VOR/DME R-192 to KICNE INT/JAC VOR/DME 26.6 DME and hold, continue climb-in-hold to 14000.
---	-----------	--

ATIS 120.625	SALT LAKE CENTER 133.25 285.6	JACKSON TOWER* 118.075 (CTAF)	GND CON 124.55	UNICOM 122.95
------------------------	---	---	--------------------------	-------------------------

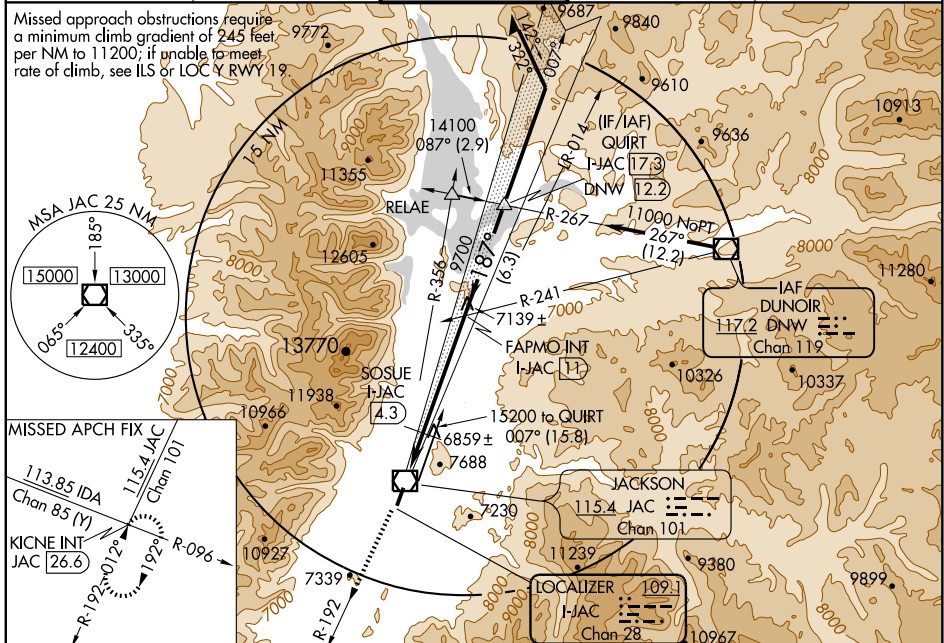

ELEV 6451	14000	KICNE INT JAC (26.6)	*LOC only	QUIRT I-JAC (17.3)	Remain within 10 NM
-----------	-------	----------------------	-----------	--------------------	---------------------

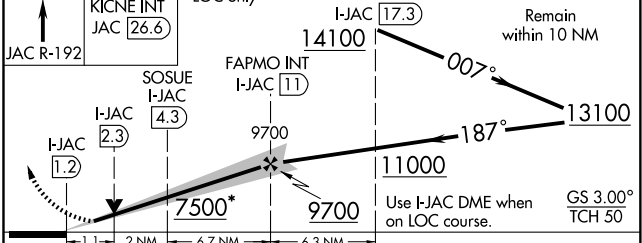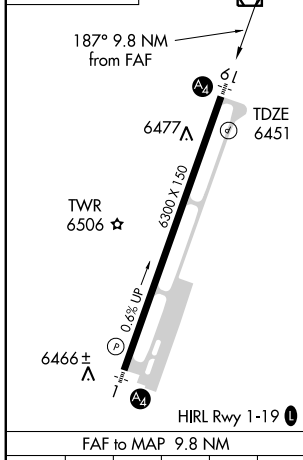


CATEGORY	A	B	C	D
S-ILS 19	6651- $\frac{3}{4}$ 200 (200- $\frac{3}{4}$)			
S-LOC 19	7500-1 $\frac{1}{4}$ 1049 (1100-1 $\frac{1}{4}$)	7500-1 $\frac{1}{2}$ 1049 (1100-1 $\frac{1}{2}$)	7500-3 1049 (1100-3)	1049 (1100-3)
CIRCLING	7500-1 $\frac{1}{4}$ 1049 (1100-1 $\frac{1}{4}$)	7500-1 $\frac{1}{2}$ 1049 (1100-1 $\frac{1}{2}$)	7500-3 1049 (1100-3)	1049 (1100-3)
SOSUE FIX MINIMUMS				
S-LOC 19	6840- $\frac{3}{4}$ 389 (400- $\frac{3}{4}$)			6840-1 $\frac{1}{4}$ 389 (400-1 $\frac{1}{4}$)
CIRCLING	6840-1 389 (400-1)	6920-1 469 (500-1)	6920-1 $\frac{1}{2}$ 469 (500-1 $\frac{1}{2}$)	7080-2 629 (700-2)

RNAV (GPS) X RWY 1

JACKSON HOLE (JAC)


WAAS CH 58299	APP CRS 006°	Rwy Idg TDZE Apt Elev	6300 6431 6451
W01A			

⚠ Circling NA east of Rwy 1-19. Inoperative table does not apply.
⚠ If local altimeter setting not received, procedure NA.
 Baro-VNAV NA below -27°C (-16°F). DME/DME RNP-0.3 NA.


MALS 

MISSED APPROACH: Climb to 14000 direct QUILT and via 088° track to DNW VOR/DME and hold, continue climb-in-hold to 14000.


ATIS 120.625	SALT LAKE CENTER 133.25 285.6	JACKSON TOWER* 118.075 (CTAF) 	GND CON 124.55	UNICOM 122.95
------------------------	---	---	--------------------------	-------------------------

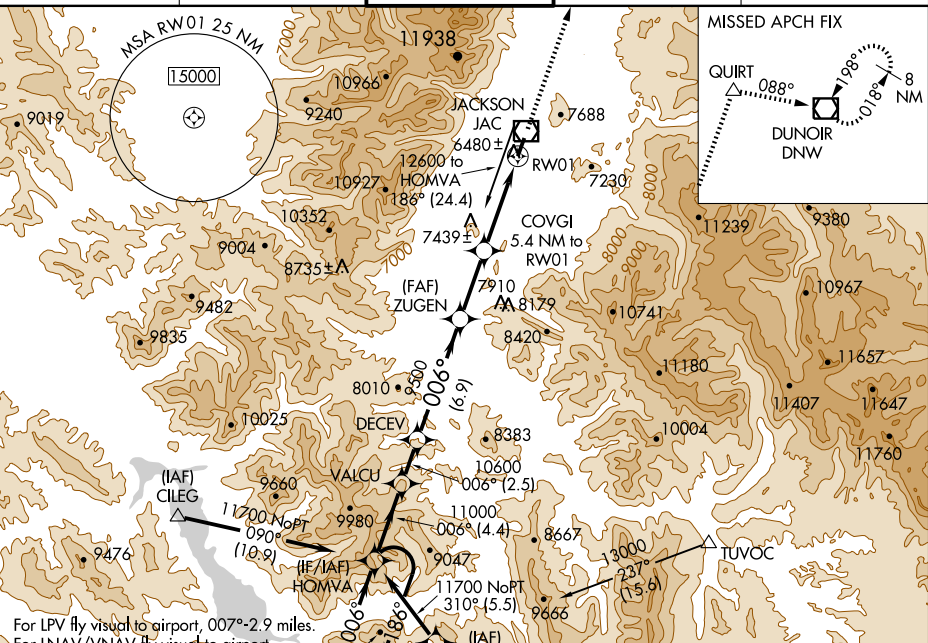

For LPV fly visual to airport, 007°-2.9 miles.
 For LNAV/VNAV fly visual to airport, 007°-3.2 miles.

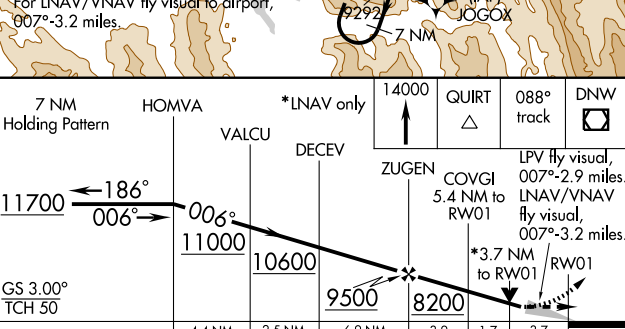

CATEGORY	A	B	C	D
LPV DA	7393-2 962 (1000-2)			
LNAV/VNAV DA	7470-2	1039 (1100-2)	7470-3	1039 (1100-3)
LNAV MDA	7640-1¼ 1209 (1200-1¼)	7640-1½ 1209 (1200-1½)	7640-3	1209 (1200-3)
CIRCLING	7640-1¼ 1189 (1200-1¼)	7640-1½ 1189 (1200-1½)	7640-3	1189 (1200-3)

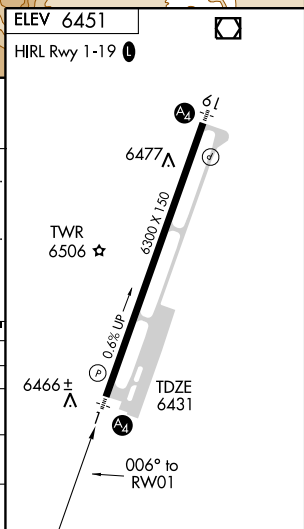

RNAV (RNP) Y RWY 1

JACKSON HOLE (JAC)

APP CRS	Rwy Idg	6300
006°	TDZE	6431
	Apt Elev	6451


GPS required. For uncompensated Baro-VNAV systems, procedure NA below -28°C (-18°F) or above 36°C (97°F). Inoperative table does not apply. Visibility reduction by helicopters NA. When VGSII inoperative, procedure NA at night.

MALS




MISSED APPROACH: Climb to 14000 via track 007° to QUIRT and via track 088° to DNW VOR/DME and hold, continue climb-in-hold to 14000.

ATIS	SALT LAKE CENTER	JACKSON TOWER*	GND CON	UNICOM
120.625	133.25 285.6	118.075 (CTAF)	124.55	122.95

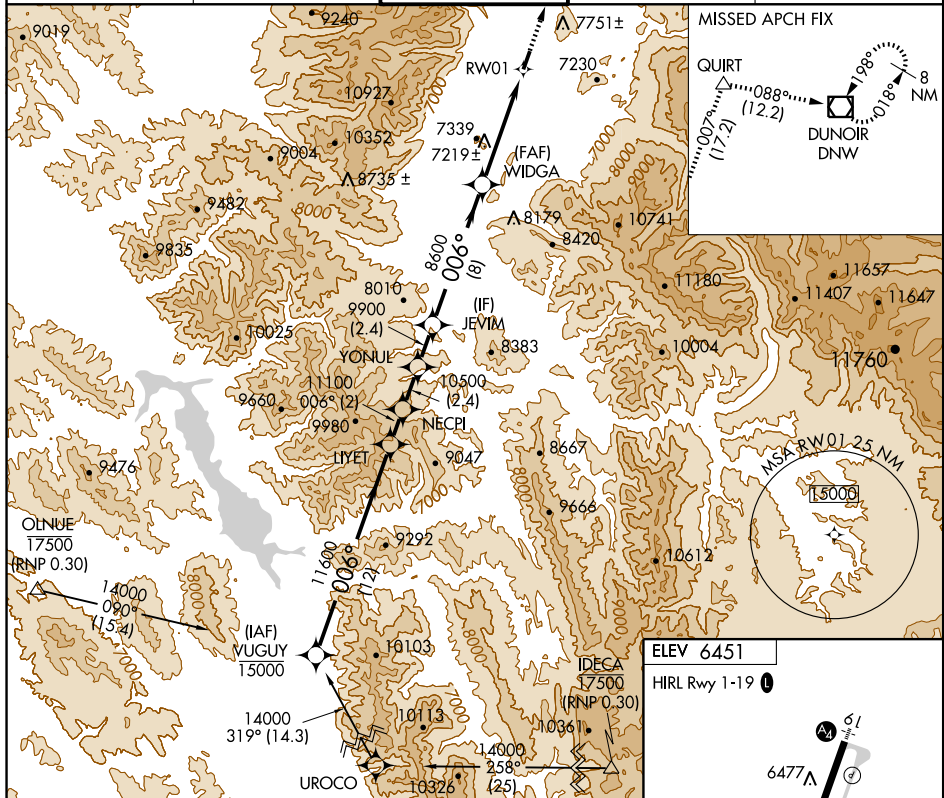


MISSED APCH FIX



ELEV 6451

HIRL Rwy 1-19

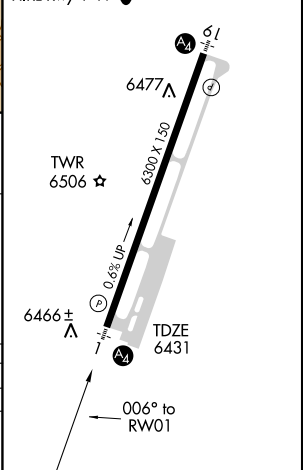

VUGUY	LIYET	NECPI	YONUL	JEVIM	WIDGA	RW01
14000	11600	11100	10500	9900	8600	
Procedure Turn NA						
GP 3.00°						
TCH 50						
	12 NM	2 NM	2.4	2.4	8 NM	6.6
CATEGORY	A	B	C	D		
RNP 0.3 DA	7364-4	933 (1000-4)				


SPECIAL AIRCRAFT & AIRCREW AUTHORIZATION REQUIRED

RNAV (RNP) Z RWY 1



JACKSON HOLE (JAC)

APP CRS	Rwy Idg	6300
006°	TDZE	6431
	Apt Elev	6451



▽ GPS required. For unconsolidated Baro-VNAV systems, procedure NA below -28°C (-18°F) or above 36°C (97°F). For inoperative MALS, increase RNP 0.30 visibility all cats to 1½. Visibility reduction by helicopters NA. When VGSi inoperative, procedure NA at night. Missed approach requires RNP less than 1.0 and minimum climb of 280 feet per NM to 8100; if unable, see RNAV (RNP) Y RWY 1.

MALS

MISSED APPROACH: Climb to 14000 via track 007° to UBEVE and via track 007° to QUIRT and via track 088° to DNW VOR/DME and hold, continue climb-in-hold to 14000.

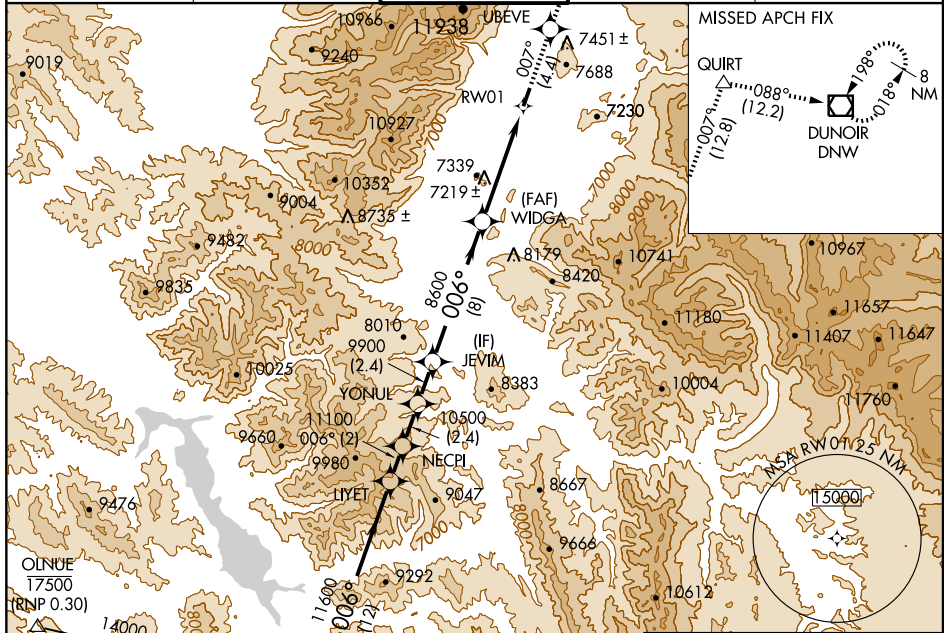ATIS 120.625	SALT LAKE CENTER 133.25 285.6	JACKSON TOWER* 118.075 (CTAF)	GND CON 124.55	UNICOM 122.95
-------------------------------	--	--	---------------------------------	--------------------------------

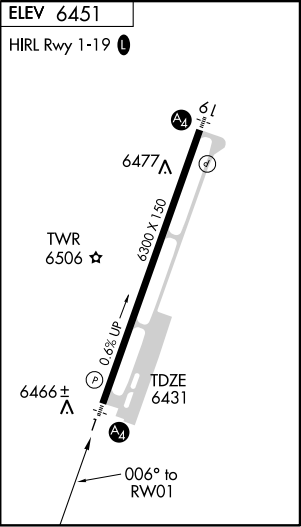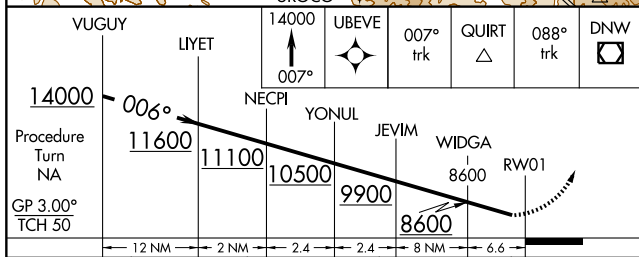

ELEV 6451	HIRL Rwy 1-19
------------------	----------------------



CATEGORY	A	B	C	D
RNP 0.3 DA	6811-1	380 (400-1)		NA

SPECIAL AIRCRAFT & AIRCREW AUTHORIZATION REQUIRED

NW-1, 08 APR 2010 to 06 MAY 2010

APP CRS	Rwy Idg	6300
187°	TDZE	6451
	Apt Elev	6451

RNAV (RNP) Z RWY 19






JACKSON HOLE (JAC)

GPS required. For uncompensated Baro-VNAV systems, procedure NA below -28°C (-18°F) or above 35°C (96°F). For inoperative MALS, increase RNP 0.30 all cats visibility to 1½. Visibility reduction by helicopters NA. When VGSi inoperative, procedure NA at night.



MISSED APPROACH: Climb to 14000 via track 187° to NECP1 and via track 096° to VECUR and via left turn on track 348° to DNW VOR/DME and hold.

ATIS 120.625	SALT LAKE CENTER 133.25 285.6	JACKSON TOWER* 118.075 (CTAF)	GND CON 124.55	UNICOM 122.95
------------------------	---	---	--------------------------	-------------------------

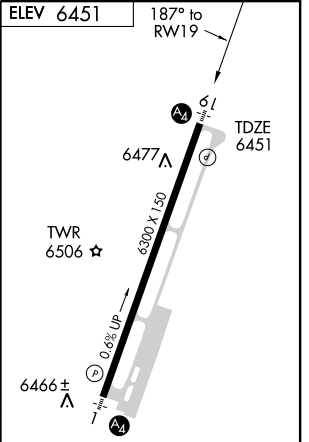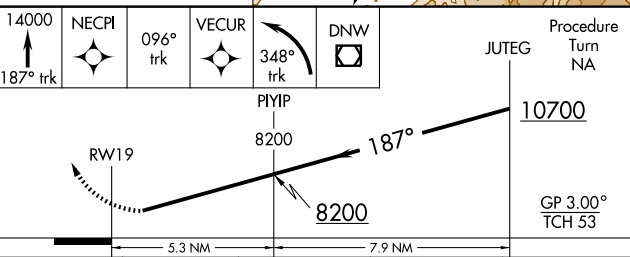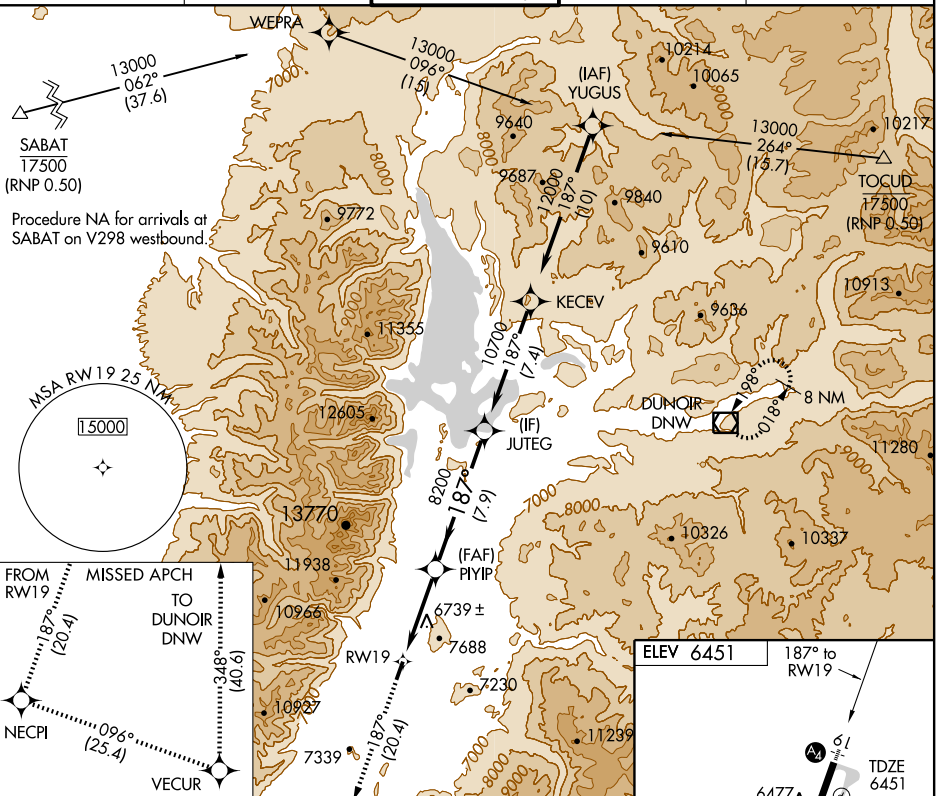


CATEGORY	A	B	C	D
RNP 0.3 DA	6856-1¼	405 (500-1¼)		NA

SPECIAL AIRCRAFT & AIRCREW AUTHORIZATION REQUIRED

HIRL Rwy 1-19

NW-1, 08 APR 2010 to 06 MAY 2010

SALT LAKE CENTER
133.25 285.6
CASPER RADIO
122.05
CTAF
118.075
UNICOM
122.95
AWOS-3 120.625

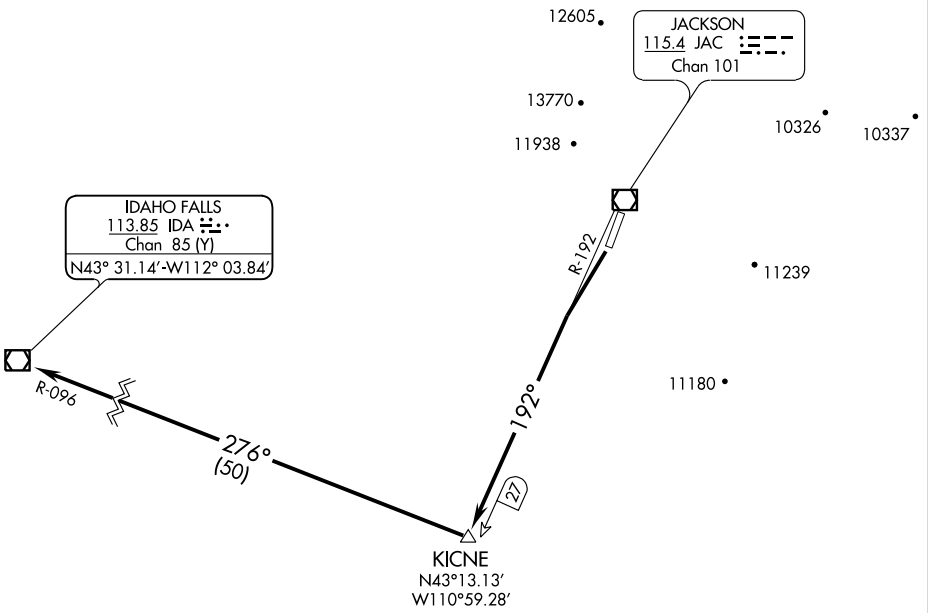

TAKE-OFF MINIMUMS:

Rwy 19: Standard with minimum climb of 335' per NM to 14000 or 4400-3 for climb in visual conditions.

Rwy 1: Not authorized - ATC.

NOTE: Rwy 19, Bush 485 feet from departure end of runway, 513 feet right of centerline, 6428' MSL.



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 19: Climb to 14000 via JAC R-192 to KICNE INT/JAC 27 DME, then right turn via IDA R-096 to IDA VOR/DME; or for climb in visual conditions: cross JAC VOR/DME southbound at or above 10800, then climb to 14000 via JAC R-192 to KICNE INT/JAC 27 DME, then right turn via IDA R-096 to IDA VOR/DME.


NW-1, 08 APR 2010 to 06 MAY 2010


VOR/DME RWY 1



JACKSON HOLE (JAC)

VOR/DME JAC 115.4 Chan 101	APP CRS 008°	Rwy Idg TDZE Apt Elev 6300 6431 6451
--	------------------------	--



⚠ Circling NA east of Rwy 1-19.
⚠ Inoperative table does not apply.
 If local altimeter setting not received, procedure NA.

MALS
 MISSED APPROACH: Climb to 14000 direct JAC VOR/DME, and via JAC R-017 to NALSJ Int/JAC 16.5 DME, and right turn via DNW R-267 to DNW VOR/DME and hold.

ATIS 120.625	SALT LAKE CENTER 133.25 285.6	JACKSON TOWER* 118.075 (CTAF) 	GND CON 124.55	UNICOM 122.95
------------------------	---	---	--------------------------	-------------------------

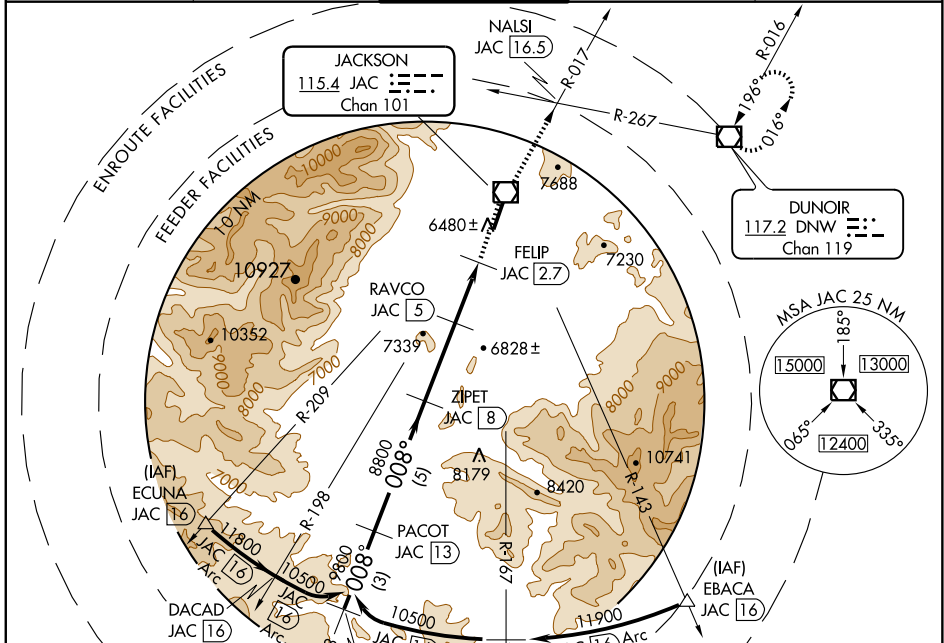

ELEV 6451 
 HIRL Rwy 1-19 

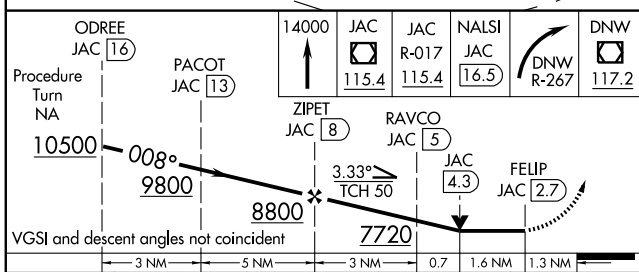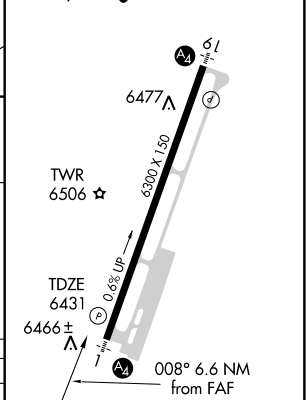

VGSI and descent angles not coincident

CATEGORY	A	B	C	D
S-1	7380-1½ 949 (1000-1½)		7380-2¾ 949 (1000-2¾)	7380-3 949 (1000-3)
CIRCLING	7380-1½ 929 (1000-1½)		7380-2¾ 929 (1000-2¾)	7380-3 929 (1000-3)

Knots	60	90	120	150	180
Min:Sec					



VOR/DME RWY 19

JACKSON HOLE (JAC)

VOR/DME JAC 115.4 Chan 101	APP CRS 193°	Rwy Idg 6300 TDZE 6451 Apt Elev 6451
--	------------------------	---

<p>⚠ Circling NA east of Rwy 1-19. ⚠ Inoperative table does not apply. If local altimeter setting not received, procedure NA.</p>	<p>MALS A1</p>	<p>MISSED APPROACH: Climb to 14000 via JAC R-192 to KICNE INT/JAC 26.6 DME, and right turn via IDA R-096 to IDA VOR/DME and hold.</p>
---	--------------------	---

ATIS 120.625	SALT LAKE CENTER 133.25 285.6	JACKSON TOWER* 118.075 (CTAF)	GND CON 124.55	UNICOM 122.95
------------------------	---	---	--------------------------	-------------------------

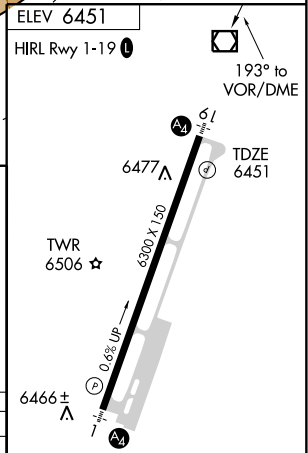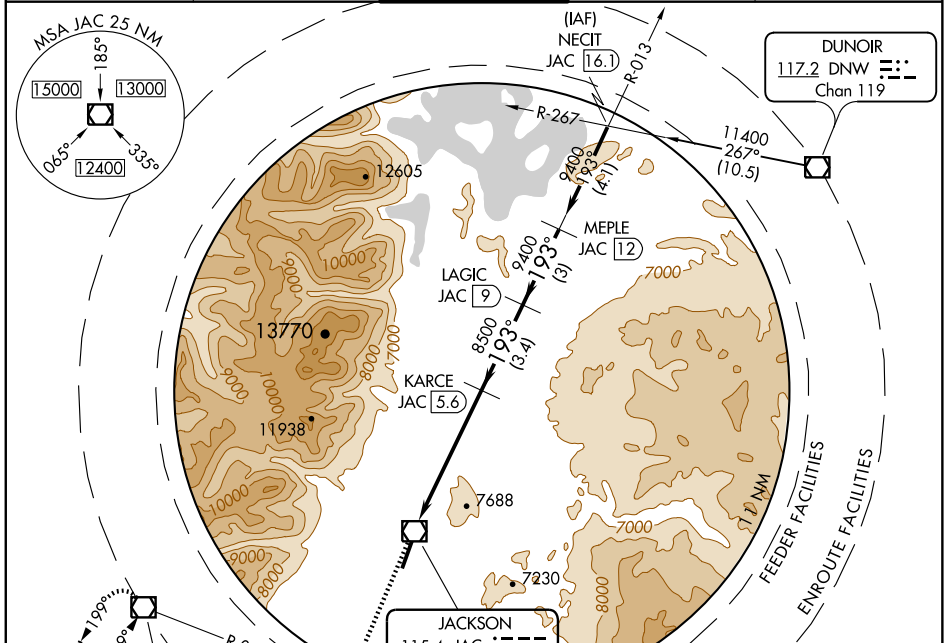


14000 ↑ KICNE JAC 26.6 JAC R-192	IDA R-096 IDA 113.85	KARCE JAC 5.6	LAGIC JAC 9	MEPLE JAC 12
<p>VOR/DME</p> <p>3.19° TCH 38</p> <p>8500</p> <p>9400</p> <p>193°</p> <p>9400</p> <p>Procedure Turn NA</p>				
0.3	3.9 NM	1.7 NM	3.4 NM	3 NM

CATEGORY	A	B	C	D
S-19	7840-1¼ 1389 (1400-1¼)	7840-1½ 1389 (1400-1½)	7840-3	1389 (1400-3)
CIRCLING	7840-1¼ 1389 (1400-1¼)	7840-1½ 1389 (1400-1½)	7840-3	1389 (1400-3)

Knots	60	90	120	150	180
Min:Sec					

KEMRR TWO DEPARTURE (RNAV)

SALT LAKE CITY CENTER
124.35 353.5
SALT LAKE CITY DEP CON
124.3 322.3

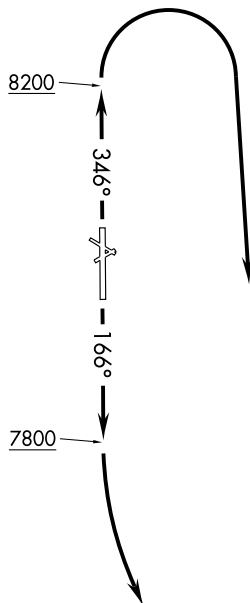TAKE-OFF MINIMUMS

Rwy 4, 10, 22, 28: NA - Rwy Surfaces.

Rwy 16, 34: Standard.

NOTE: 1. GPS Required.
2. RNAV 1.

NOTE: Chart not to scale.

FORT BRIDGER
FBR



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAY 16: Climb to 7800 via heading 166° then climbing left turn to 12000 (or assigned altitude) . . .

TAKE-OFF RUNWAY 34: Climb to 8200 via heading 346° then climbing right turn to 12000 (or assigned altitude) . . .

. . . direct FBR VOR/DME then via assigned route/fix.

RNAV (GPS) RWY 16

KEMMERER MUNI (EMM)

APP CRS 166°	Rwy Idg 8208
	TDZE 7285
	Apt Elev 7285






NA DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Evanston altimeter setting and increase all MDA 120 feet.

MISSED APPROACH: Climb to 9900 direct ILUME and hold.

AWOS-3
119.675

SALT LAKE CITY CENTER
124.35 353.5

UNICOM
122.8 (CTAF) 0

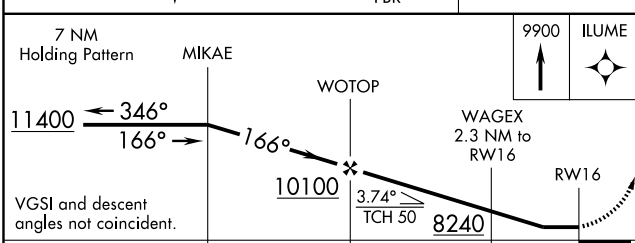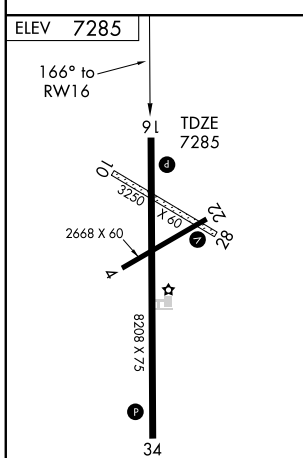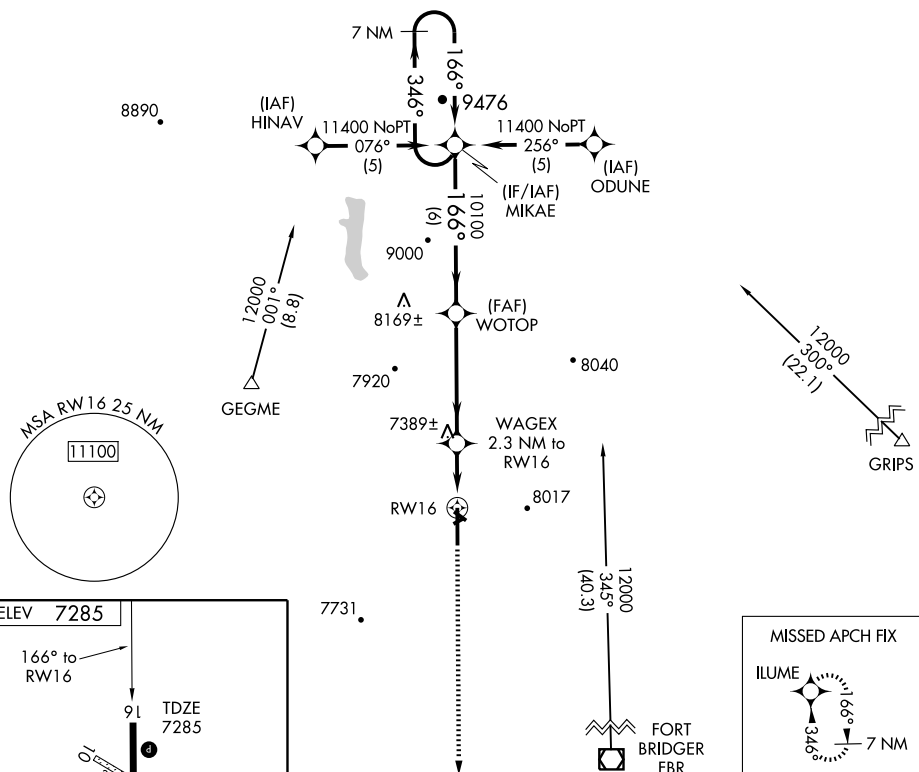

CATEGORY	A	B	C	D
LNNAV MDA	7720-1	435 (500-1)		NA
CIRCLING	7720-1 435 (500-1)	7740-1 455 (500-1)		NA

REIL Rwy 16 and 34 0
MIRL Rwy 16-34 and 4-22 0

RNAV (GPS) RWY 34

KEMMERER MUNI (EMM)

APP CRS	Rwy Idg	8208
346°	TDZE	7276
	Apt Elev	7285

▽ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Evanston altimeter setting and increase all MDA 120 feet.


▲ NA

MISSED APPROACH: Climb to 12000 direct ATOXY and via track 264° to GEGME and hold, continue climb-in-hold to 12000. When authorized by ATC, climb-in-hold to 14000.


AWOS-3
119.675

SALT LAKE CITY CENTER
124.35 353.5


UNICOM
122.8 (CTAF)

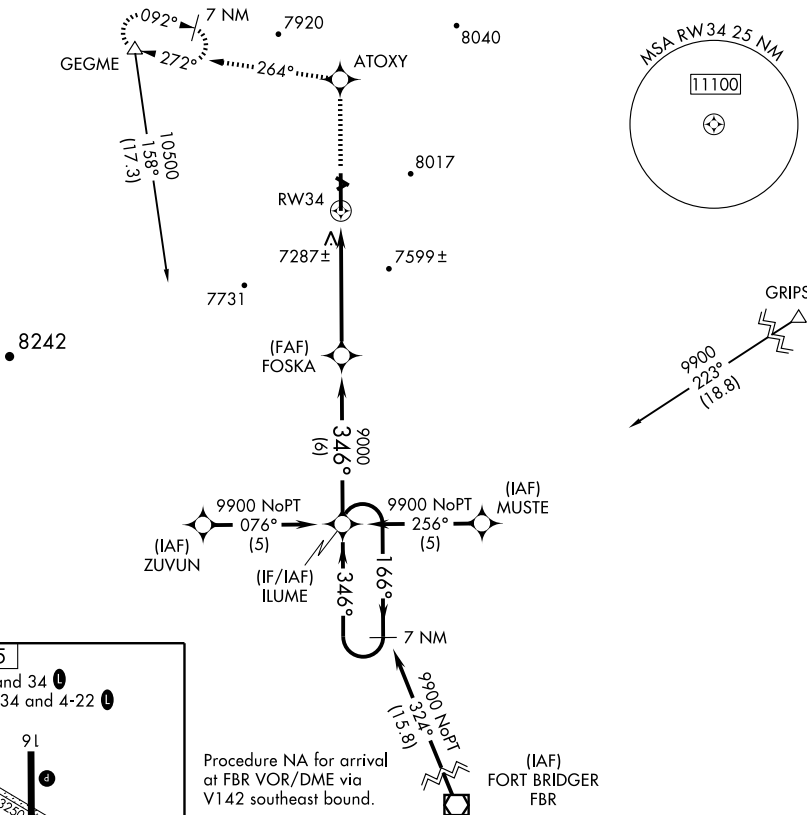

ELEV 7285
REIL Rwy 16 and 34
MIRL Rwy 16-34 and 4-22

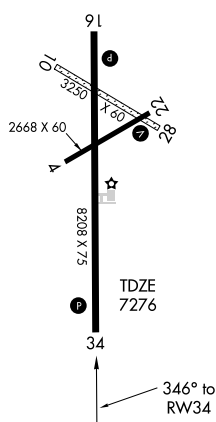

Procedure NA for arrival at FBR VOR/DME via V142 southeast bound.

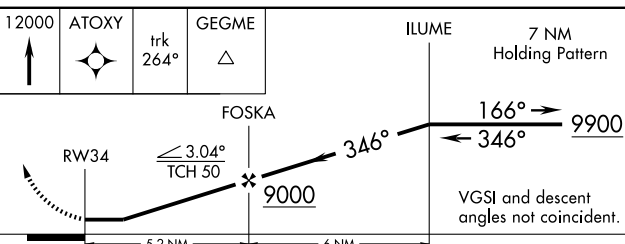

CATEGORY	A	B	C	D
LNNAV MDA	7540-1	264 (300-1)		NA
CIRCLING	7640-1 355 (400-1)	7740-1 455 (500-1)		NA

AIRPORT DIAGRAM

AL-225 (FAA)

LARAMIE RGNL (LAR)
LARAMIE, WYOMING

ASOS 135.475
UNICOM 123.05 (CTAF)


D

41°19.5'N

41°19.0'N

41°18.5'N

RWY 3-21, RWY 12-30
S86, D105, ST133, DT160

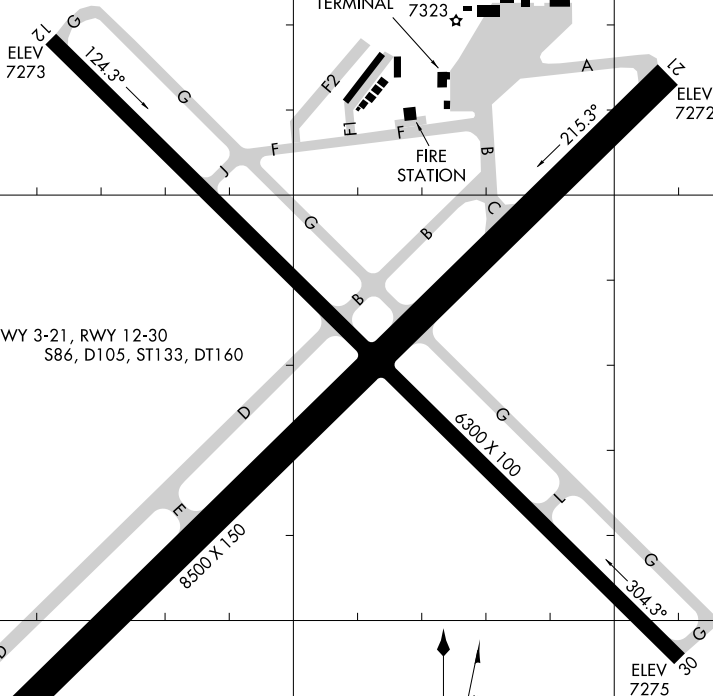

ELEV 7283

FIELD
ELEV 7284



JANUARY 2005
ANNUAL RATE OF CHANGE
0.1°W

105°41.0'W

105°40.5'W

105°40.0'W

NW-1, 08 APR 2010 to 06 MAY 2010

RNAV (GPS) RWY 12

LARAMIE RGNL (LAR)




WAAS CH 70600 W12A	APP CRS 122°	Rwy Idg TDZE Apt Elev 6300 7275 7284
--	------------------------	--

MISSED APPROACH: Climb to 10700 direct FEKEP and via 035° track to POVOH and hold.

ASOS
135.475

DENVER CENTER
125.9 284.7

UNICOM
123.05 (CTAF) 0

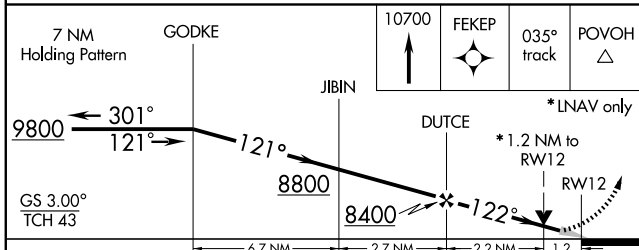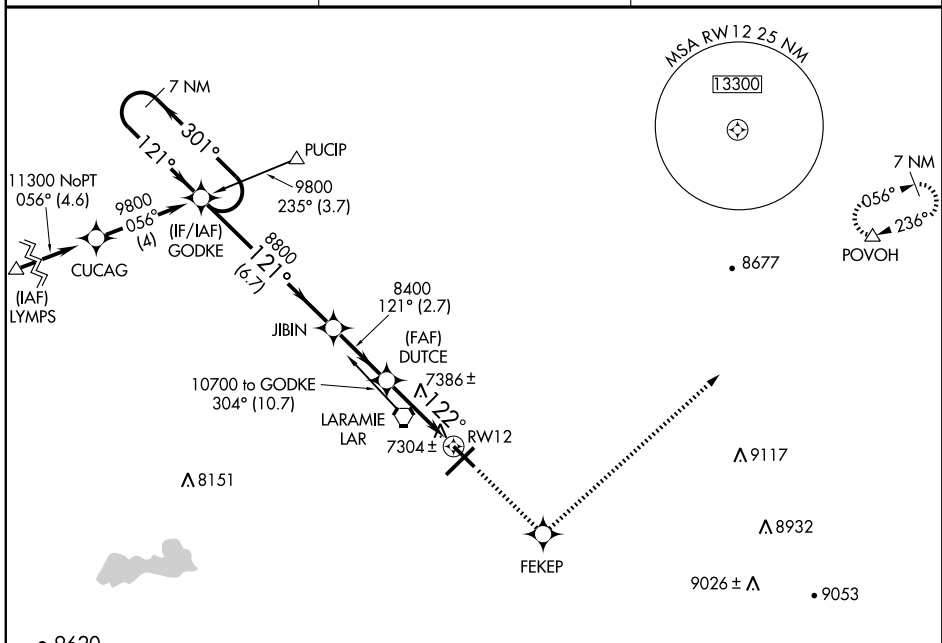

CATEGORY	A	B	C	D
LPV DA	7525-1 250 (300-1)			
RNAV/VNAV DA	7622-1¼ 347 (400-1¼)			
RNAV MDA	7700-1	425 (500-1)	7700-1¼	425 (500-1¼)
CIRCLING	7700-1¼ 416 (500-1¼)	7740-1¼ 456 (500-1¼)	7740-1½ 456 (500-1½)	7840-2 556 (600-2)

REIL Rwy 3, 12 and 21 0
MIRL Rwy 3-21 and 12-30 0

RNAV (GPS) RWY 30

LARAMIE RGNL (LAR)




WAAS CH 53600 W30A	APP CRS 302°	Rwy Idg TDZE Apt Elev	6300 7278 7284
--	------------------------	-----------------------------	---

▼ Inoperative table does not apply.
DME/DME RNP -0.3 NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV
NA below -29°C (-20°F) or above 35°C (95°F).



MISSED APPROACH: Climb to 9400 direct LIRCI and via
320° track to PUCIP and hold.

ASOS 135.475	DENVER CENTER 125.9 284.7	UNICOM 123.05 (CTAF) 0
------------------------	-------------------------------------	----------------------------------

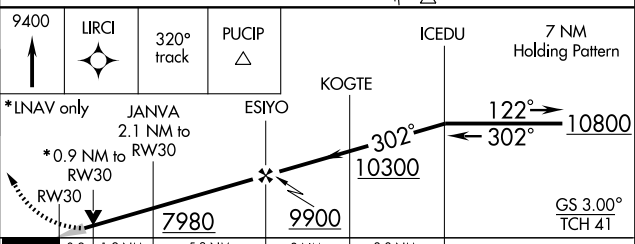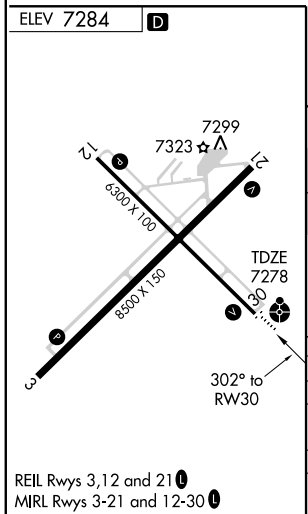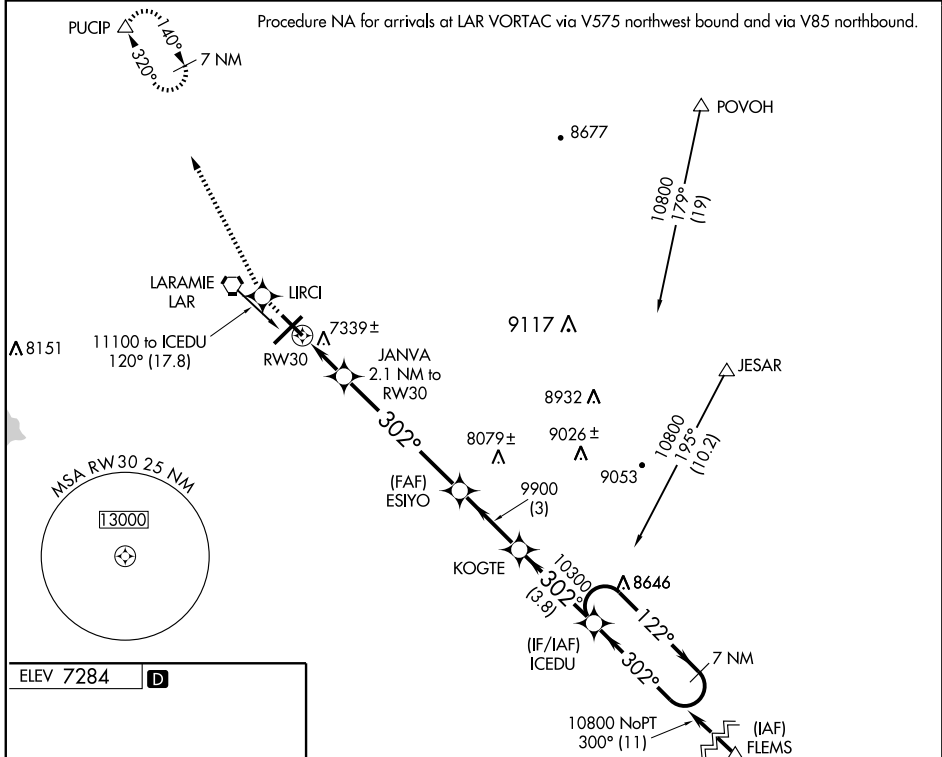

CATEGORY	A	B	C	D
LPV DA	7528-1		250 (300-1)	
LNAV/VNAV DA	7629-1½		351 (400-1½)	
LNAV MDA	7600-1		322 (400-1)	
CIRCLING	7660-1½ 376 (400-1½)	7740-1½ 456 (500-1½)	7740-1½ 456 (500-1½)	7840-2 556 (600-2)

NW-1, 08 APR 2010 to 06 MAY 2010


VOR/DME or TACAN RWY 12

LARAMIE RGNL (LAR)

VORTAC LAR 117.6 Chan 123	APP CRS 107°	Rwy Idg TDZE Apt Elev 6300 7275 7284
---	------------------------	--

MISSED APPROACH: Climb to 7700 then climbing right turn to 9500 direct LAR VORTAC and hold, continue climb-in-hold to 9500 (TACAN aircraft continue climb to 10600 via LAR VORTAC R-015 to CIKNA/18.1 DME and hold north, left turn, 195° inbound).

ASOS 135.475	DENVER CENTER 125.9 284.7	UNICOM 123.05 (CTAF)
------------------------	-------------------------------------	--------------------------------

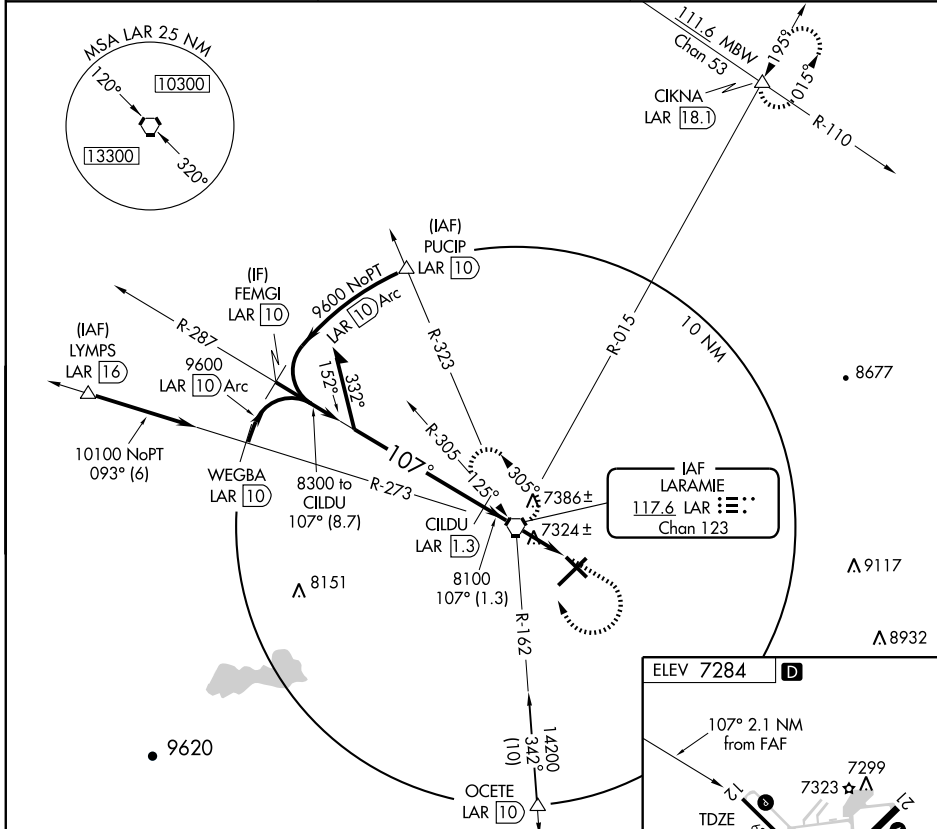

REIL Rwy 3, 12 and 21
MRL Rwy 3-21 and 12-30



VOR/DME or TACAN RWY 30

LARAMIE RGNL (LAR)

VORTAC LAR 117.6 Chan 123	APP CRS 292°	Rwy Idg TDZE Apt Elev 6300 7278 7284
---	------------------------	--


ODALS MISSED APPROACH: Climb to 9500 direct LAR VORTAC and hold, continue climb-in-hold to 9500 (TACAN aircraft continue climb to 10600 via LAR VORTAC R-015 to CIKNA INT/18.1 DME and hold north, left turns, 195° inbound.

ASOS 135.475	DENVER CENTER 125.9 284.7	UNICOM 123.05 (CTAF) 0
------------------------	-------------------------------------	---

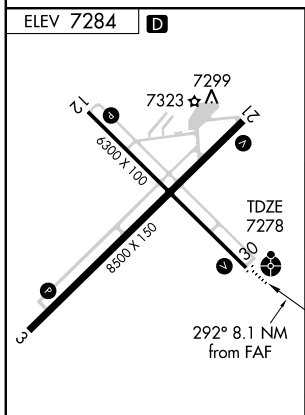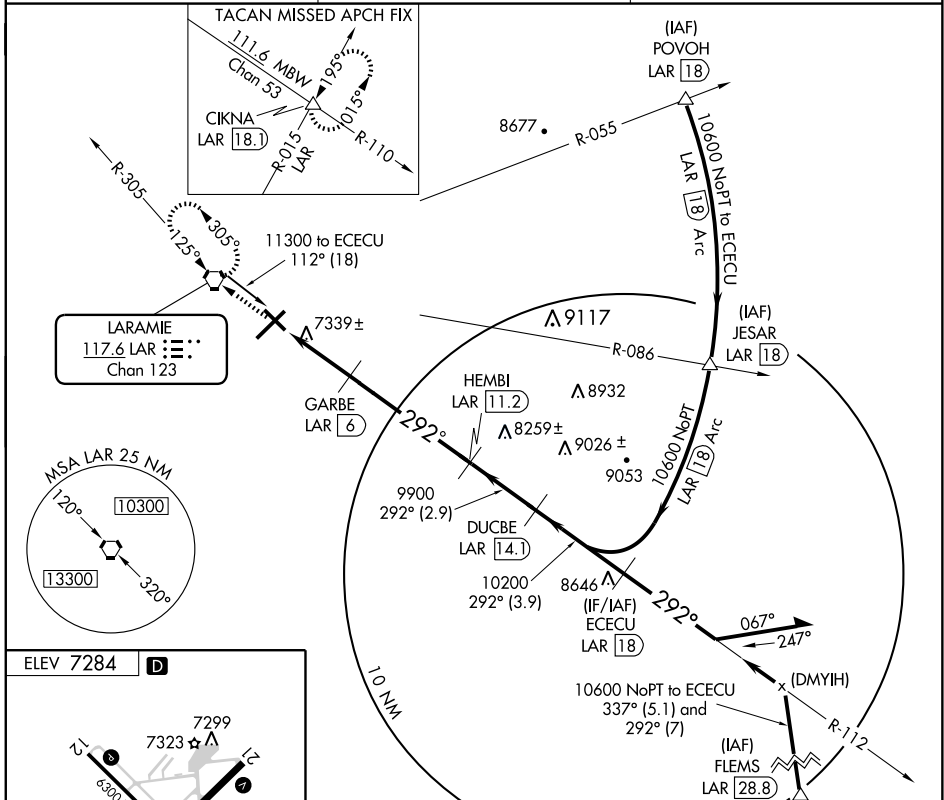

ELEV 7284 **D**

REIL Rwy 3, 12 and 21 **0**
MIRL Rwy 3-21 and 12-30 **0**

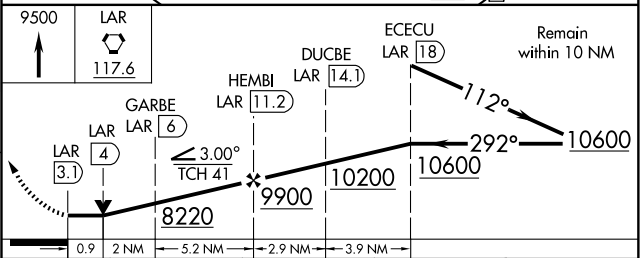

CATEGORY	A	B	C	D
S-30	7600- $\frac{3}{4}$ 322 (400- $\frac{3}{4}$)			7600-1 322 (400-1)
CIRCLING	7660-1 376 (400-1)	7740-1 456 (500-1)	7740-1 $\frac{1}{2}$ 456 (500-1 $\frac{1}{2}$)	7840-2 556 (600-2)

VOR or GPS RWY 31

NEWCASTLE/MONDELL FIELD (ECS)



VOR ECS 108.2	APP CRS 323°	Rwy Idg TDZE Apt Elev	5300 4174 4174
-------------------------	------------------------	-----------------------------	---

⚠ Circling east of Rwy 13-31 not authorized. Obtain local altimeter setting on CTAF when not received procedure not authorized.




ODALS

MISSED APPROACH: Climb to 5500 via ECS VOR R-323, then climbing left turn to 7500 direct ECS VOR and hold.

AWOS-3 118.0	DENVER CENTER 127.95 338.2	UNICOM 122.8 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

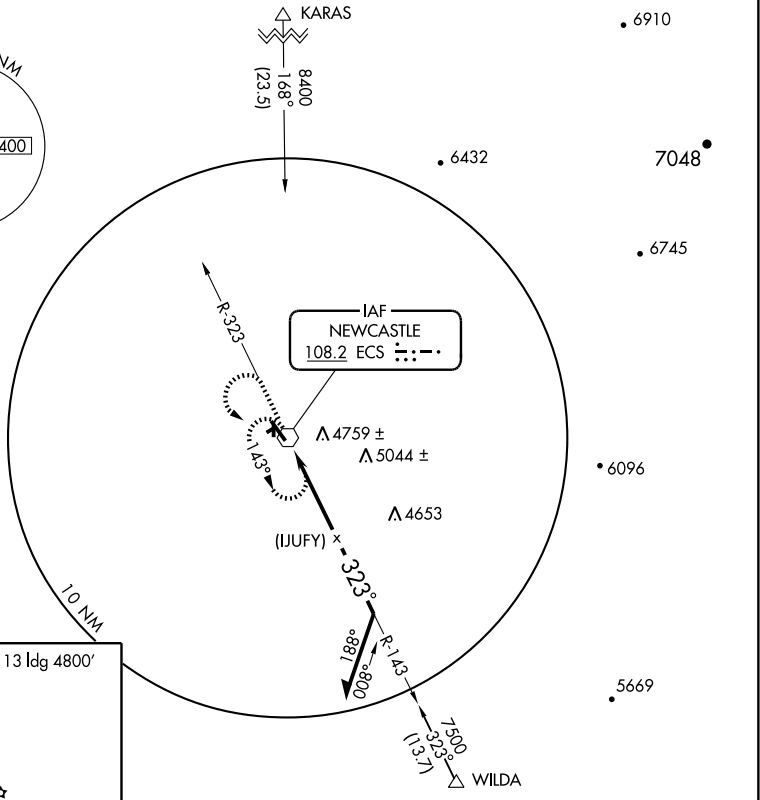

ELEV 4174 Rwy 13 Idg 4800'

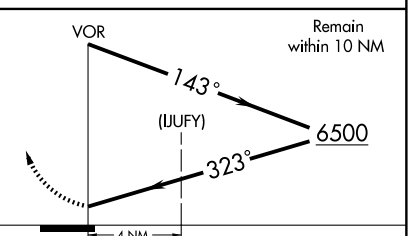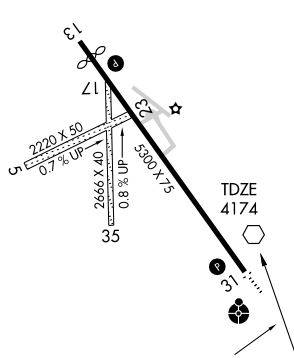

Knots	60	90	120	150	180
Min:Sec					

CATEGORY	A	B	C	D
S-31	5060-1¼	886 (900-1¼)	5060-2¾ 886 (900-2¾)	5060-3 886 (900-3)
CIRCLING	5060-1¼	886 (900-1¼)	5060-2¾ 886 (900-2¾)	5060-3 886 (900-3)

NDB PNA 392	APP CRS 309°	Rwy ldg TDZE Apt Elev	8900 N/A 7102
-----------------------	------------------------	-----------------------------	--



▼ Procedure NA at night. When local altimeter setting not received, use Mile Memorial Field altimeter setting and increase all MDA 60 feet and visibility Cat C/D ¼ mile.

MISSED APPROACH: Climbing left turn to 10000 direct BPI VOR/DME and hold.

AWOS-3
118.325



SALT LAKE CENTER
128.35 239.25

UNICOM
122.8 (CTAF) 0

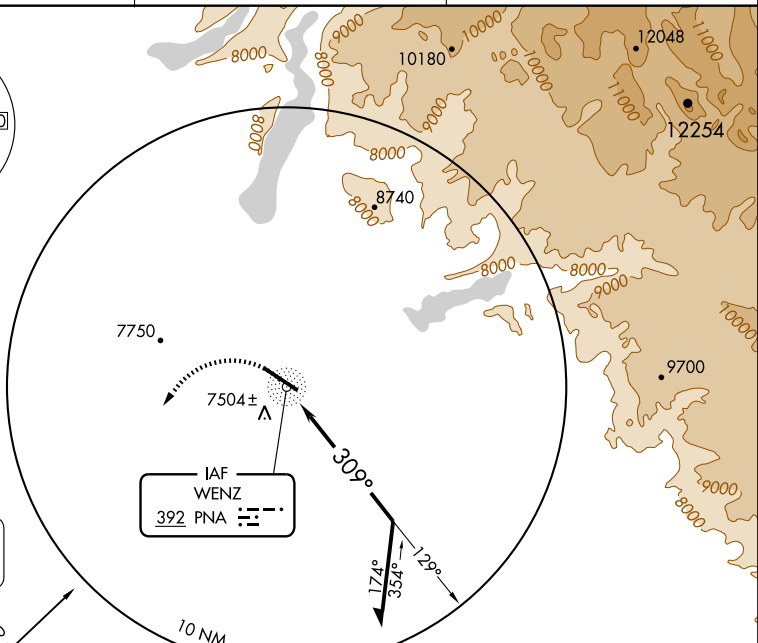

BIG PINEY
116.5 BPI
Chan 112

IAF WENZ
392 PNA

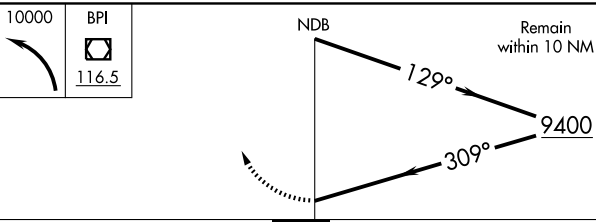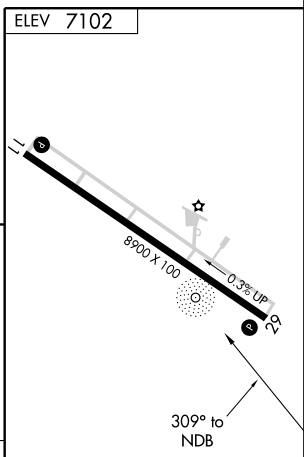

CATEGORY	A	B	C	D
CIRCLING	7900-1 798 (800-1)	7900-1¼ 798 (800-1¼)	7900-2¼ 798 (800-2¼)	7900-2½ 798 (800-2½)

REIL Rwy 11 and 29
MIRL Rwy 11-29

APP CRS	Rwy Idg	8900
119°	TDZE	7102
	Apt Elev	7102




RNAV (GPS) RWY 11

PINEDALE/RALPH WENZ FIELD (PNA)

⚠ Circling NA at night. DME/DME RNP- 0.3 NA. VDP NA when using Miley Memorial Field altimeter setting. When local altimeter setting not received, use Miley Memorial Field altimeter setting and increase all MDA 60 feet and circling Cats B/C/D visibility ¼ mile.

MISSED APPROACH: Climb to 10000 direct PENCIL and right turn via track 229° to BPI VOR/DME and hold.

AWOS-3 118.325	SALT LAKE CENTER 128.35 239.25	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

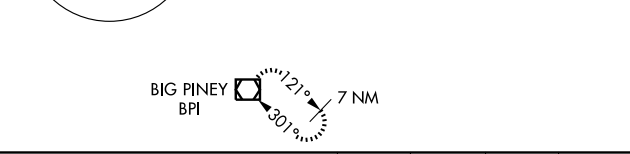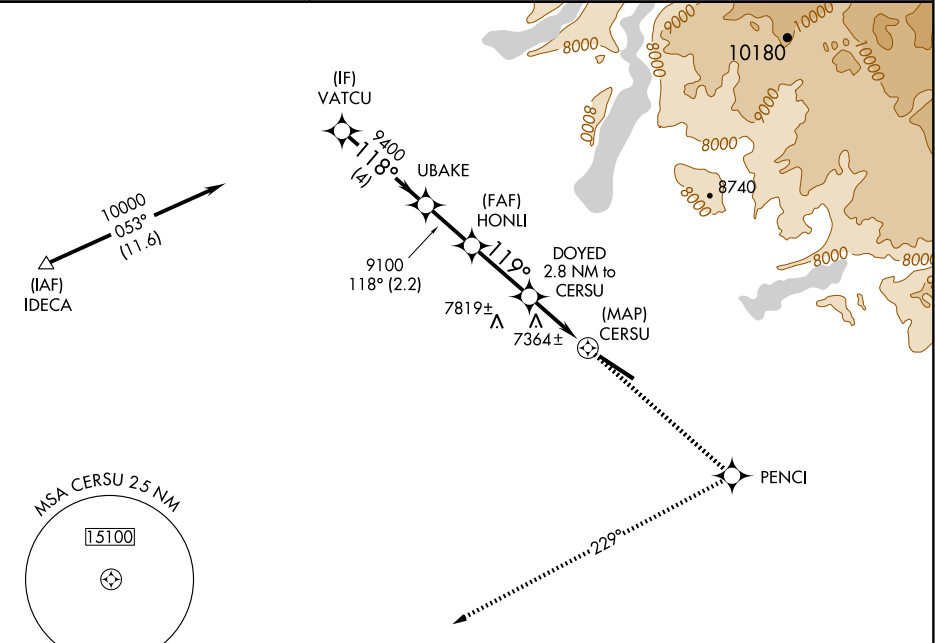

	VATCU	UBAKE	HONLI	DOYED 2.8 NM to CERSU	CERSU	BPI
Procedure Turn NA	10000	9400	9100	8200		
	4 NM	2.2 NM	2.7 NM	1.8 NM	1 NM	0.5 NM

CATEGORY	A	B	C	D
LNAV MDA	7620-1	518 (600-1)	7620-1½ 518 (600-1½)	7620-1¾ 518 (600-1¾)
CIRCLING	7760-1 658 (700-1)	7820-1 718 (800-1)	7840-2 738 (800-2)	7860-2½ 758 (800-2½)

ELEV 7102

TDZE 7102

REIL Rwy 11 and 29 0

MIRL Rwy 11-29 0

APP CRS	Rwy Idg	8900
291°	TDZE	7081
	Apt Elev	7102



RNAV (GPS) RWY 29

PINEDALE/ RALPH WENZ FIELD (PNA)

⚠ DME/DME RNP-0.3 NA. Procedure NA at night. VDP NA when using Miley Memorial Field altimeter setting. When local altimeter setting not received, use Miley Memorial Field altimeter setting and increase all MDA 60 feet and circling Cats B/C/D visibility ¼ mile.

MISSED APPROACH: Climb to 10000 direct WUSEP and via track 201° to BPI VOR/DME and hold.

AWOS-3 118.325	SALT LAKE CENTER 128.35 239.25	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

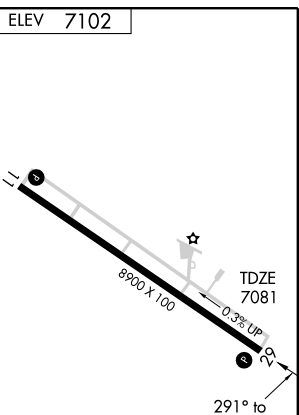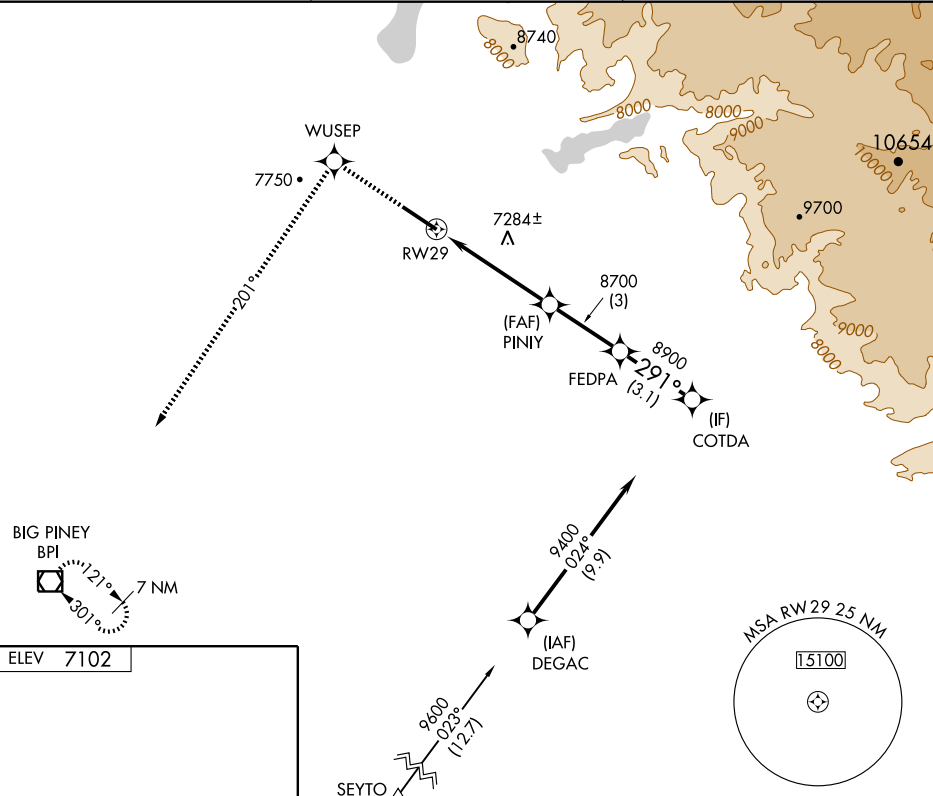

10000	WUSEP	trk 201°	BPI	VGS1 and descent angles not coincident.			
				FEDPA	COTDA		
		1.6 NM to RWY 29	PINIY			291°	9400
		RWY 29				8700	Procedure Turn NA
		1.6 NM	3.3 NM	3 NM	3.1 NM		

CATEGORY	A	B	C	D
LNAV MDA	7600-1 519 (500-1)		7600-1½ 519 (500-1½)	7600-1¾ 519 (500-1¾)
CIRCLING	7760-1 658 (700-1)	7820-1 718 (800-1)	7840-2 738 (800-2)	7860-2½ 758 (800-2½)

REIL Rwy 11 and 29 0
MIRL Rwy 11-29 0

NDB or GPS RWY 31

POWELL MUNI (POY)







NDB POY 344	APP CRS 320°	Rwy Idg TDZE Apt Elev 6205 5092 5092
-----------------------	------------------------	--

▼ Obtain local altimeter setting on CTAF; when not received, procedure not authorized.

▲ NA

MISSED APPROACH: Climb to 6500 via 320° bearing from POY NDB then climbing left turn to 7400 direct POY NDB and hold.

AWOS-3 119.275	CASPER RADIO 122.3	UNICOM 122.7 (CTAF)
--------------------------	------------------------------	-------------------------------

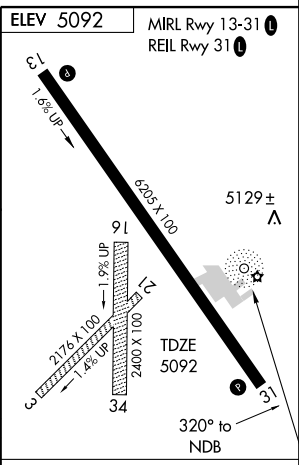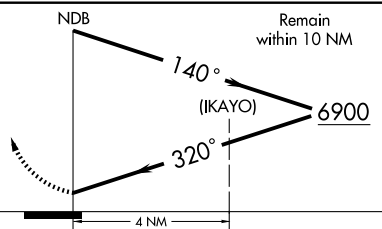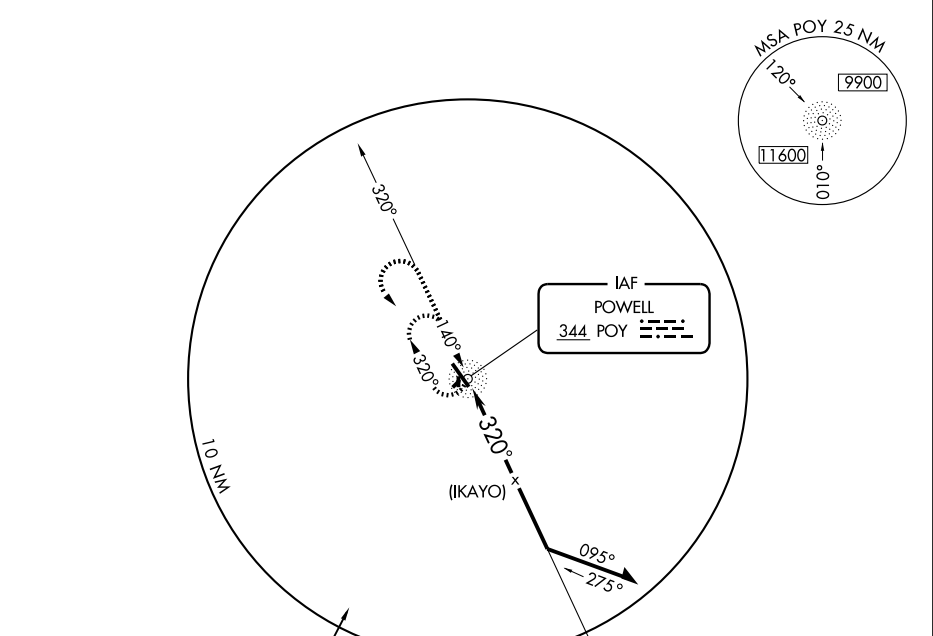

CATEGORY	A	B	C	D
S-31	5500-1 408 (500-1)	5560-1 468 (500-1)	5500-1¼ 468 (500-1½)	408 (500-1¼)
CIRCLING	5500-1 408 (500-1)	5560-1 468 (500-1)	5560-1½ 468 (500-1½)	5660-2 568 (600-2)

Knots	60	90	120	150	180
Min:Sec					

WAAS CH 93716 W22A	APP CRS 221°	Rwy Idg TDZE Apt Elev 7008 6813 6813
--	------------------------	--



RNAV (GPS) RWY 22

RAWLINS MUNI/HARVEY FIELD (RWL)



⚠ Circling NA NW of Rwy 4-22.
⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -28°C (-18°F) or above 35°C (95°F).
 DME/DME RNP-0.3 NA. Procedure NA at night.
 Visibility reduction by helicopters NA.
 When local altimeter setting not received, procedure NA.

MISSED APPROACH: Climb to 11700 direct EFWOV and via track 254° to CKW VOR/DME and hold, continue climb-in-hold to 11700.

ASOS 118.525	DENVER CENTER 132.1 254.35	UNICOM 123.0 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

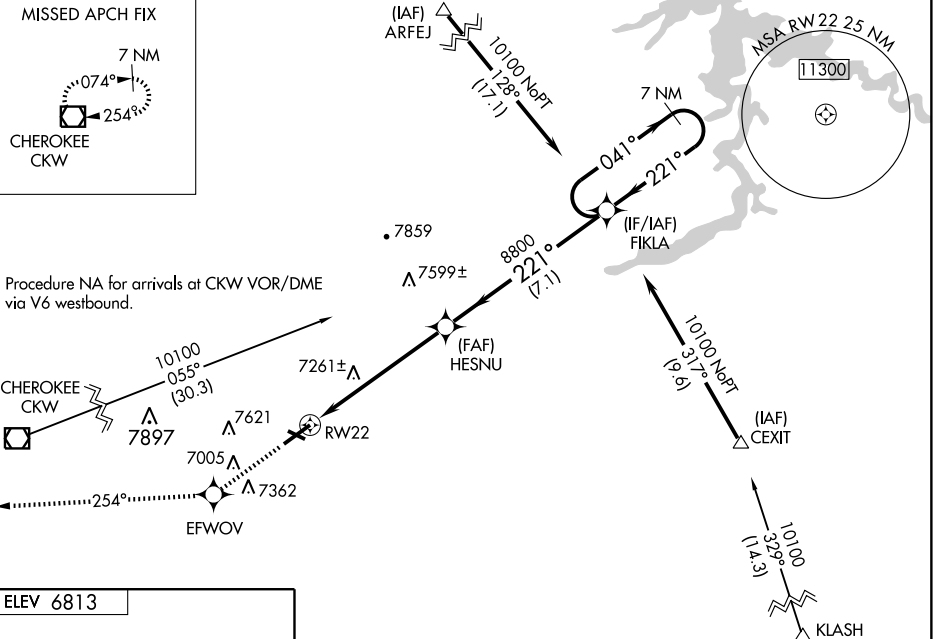

Procedure NA for arrivals at CKW VOR/DME via V6 westbound.

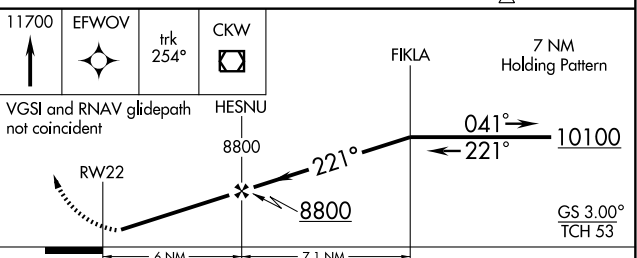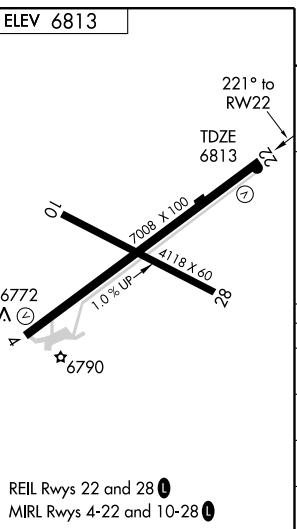

CATEGORY	A	B	C	D
LPV DA	7143-1¼ 330 (400-1¼)			
LNAV/VNAV DA	7711-4 898 (900-4)			
LNAV MDA	7660-1 847 (900-1)	7660-1¼ 847 (900-1¼)	7660-2½ 847 (900-2½)	7660-2¾ 847 (900-2¾)
CIRCLING	7660-1 847 (900-1)	7660-1¼ 847 (900-1¼)	7660-2½ 847 (900-2½)	7680-2¾ 867 (900-2¾)

NW-1. 08 APR 2010 to 06 MAY 2010

VOR/DME RWL 109.4 Chan 31	APP CRS 221°	Rwy Idg TDZE Apt Elev 7008 6813 6813
---	------------------------	--




VOR/DME RWY 22

RAWLINS MUNI/HARVEY FIELD (RWL)

⚠ Circling NA northwest of Rwy 4-22.
⚠ Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 11700 direct CKW VOR/DME and hold, continue climb-in-hold to 11700.

ASOS 118.525	DENVER CENTER 132.1 254.35	UNICOM 123.0 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

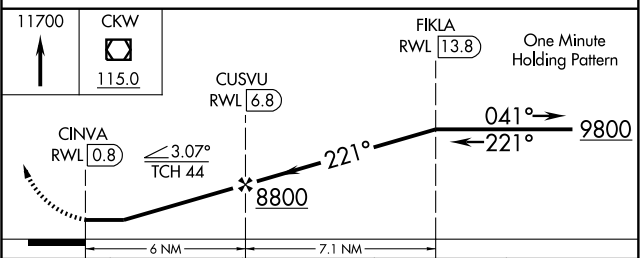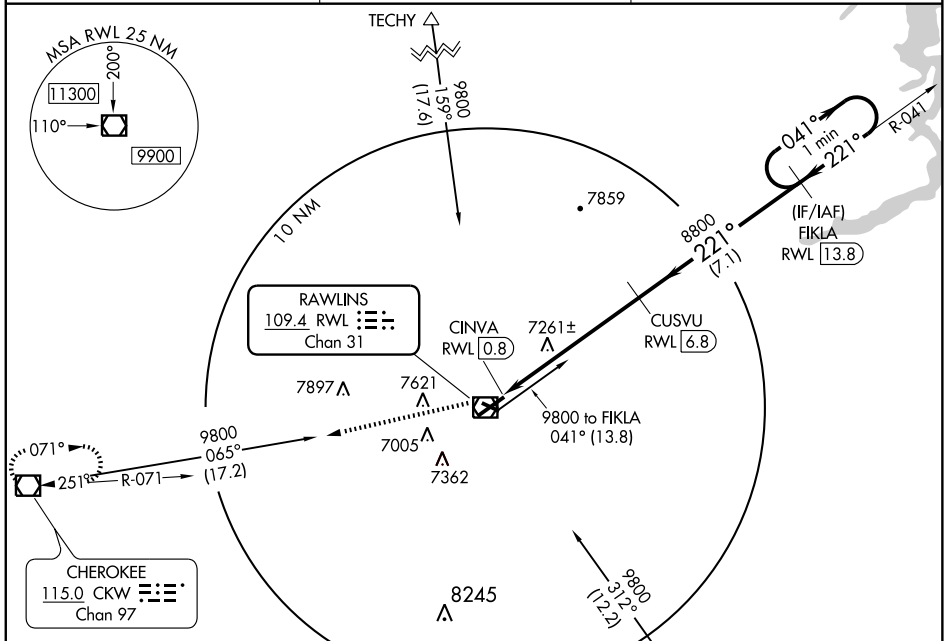

CATEGORY	A	B	C	D
S-22	7740-1¼ 927 (1000-1¼)		7740-2¾ 927 (1000-2¾)	7740-3 927 (1000-3)
CIRCLING	7740-1¼ 927 (1000-1¼)		7740-2¾ 927 (1000-2¾)	7740-3 927 (1000-3)

REIL Rwy 22 and 28 **0**
 MIRL Rwy 4-22 and 10-28 **0**

NW-1, 08 APR 2010 to 06 MAY 2010

LOC I-RW 110.5	APP CRS 283°	Rwy Idg TDZE Apt Elev	8203 5456 5528
--------------------------	------------------------	-----------------------------	---




ILS or LOC RWY 28

RIVERTON RGNL (RIW)


⚠ When local altimeter setting not received, use Lander altimeter setting and increase all DA 53 feet, all MDA 60 feet, and S-LOC Cat D visibility ¼ mile.
⚠ For inoperative MALSRS when using Lander altimeter setting, increase S-ILS all Cts visibility to 1 mile.

MALSRS
 MISSED APPROACH: Climb to 6800 then climbing right turn to 7700 direct RIW VOR/DME and hold.

ASOS 121.425	SALT LAKE CENTER 133.25 285.6	UNICOM 122.8 (CTAF)
------------------------	---	-------------------------------

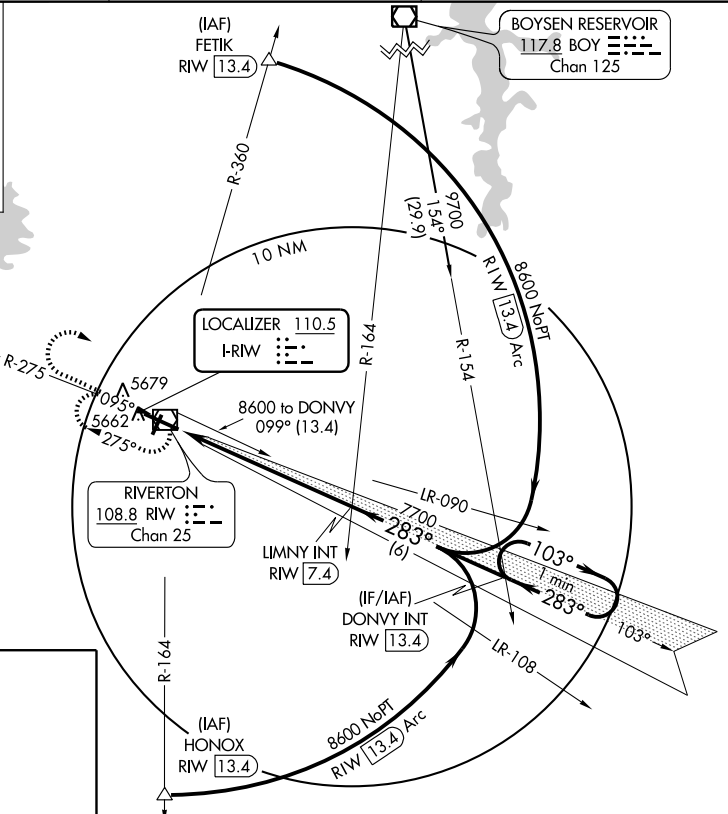


ELEV 5528

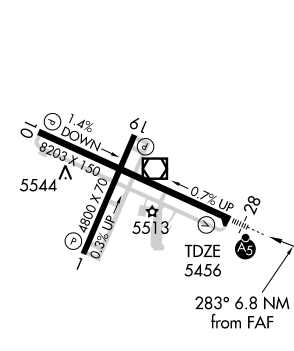

REIL Rwy 1, 10 and 19
 MIRL Rwy 1-19
 HIRL Rwy 10-28

FAF to MAP 6.8 NM

Knots	60	90	120	150	180
Min:Sec	6:48	4:32	3:24	2:43	2:16

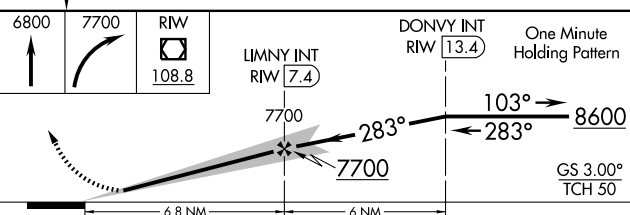

CATEGORY	A	B	C	D
S-ILS 28	5656-½ 200 (200-½)			
S-LOC 28	5880-½ 424 (400-½)		5880-¾ 424 (400-¾)	
CIRCLING	5980-1 452 (500-1)		5980-1½ 452 (500-1½)	6080-2 552 (600-2)

NW-1. 08 APR 2010 to 06 MAY 2010

WAAS CH 42899 W10A	APP CRS 103°	Rwy Idg TDZE Apt Elev	8203 5528 5528
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 10

RIVERTON RGNL (RIW)



▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 37°C (98°F).
▲ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
 When local altimeter setting not received, use Lander altimeter setting and increase all DA 53 feet and all MDA 60 feet, and increase LPV and LNAV-VNAV all Cats and LNAV Cat D visibility ¼ mile.
 Baro-VNAV and VDP NA when using Lander altimeter setting.

MISSED APPROACH: Climb to 8600 direct DONVY and hold.

ASOS 121.425	SALT LAKE CENTER 133.25 285.6	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

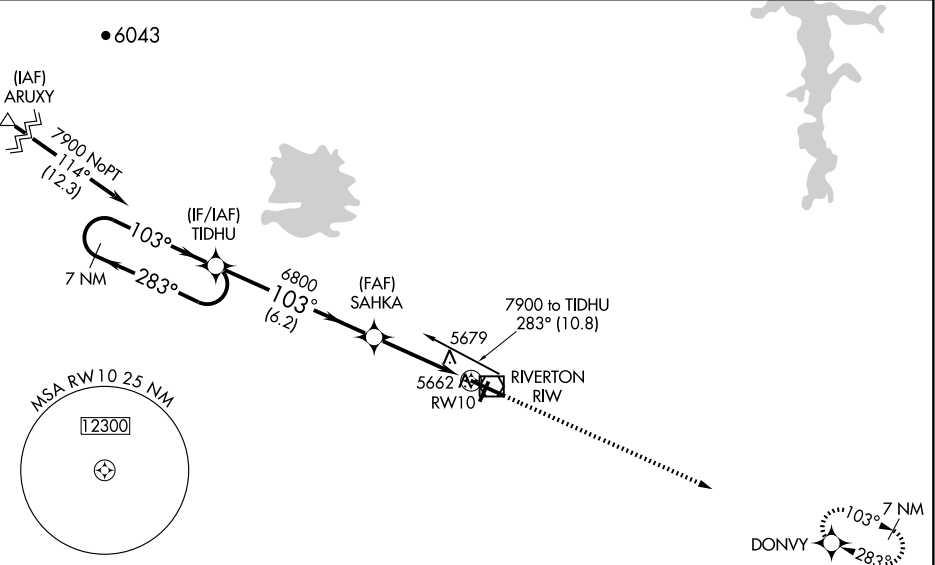

ELEV 5528

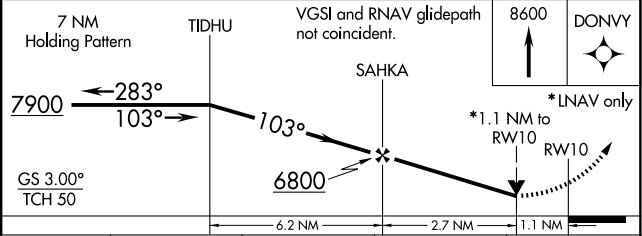

CATEGORY	A	B	C	D
LPV DA		5919-1¼	391 (400-1¼)	
LNAV/VNAV DA		5976-1½	448 (500-1½)	
LNAV MDA	5940-1	412 (500-1)	5940-1¼	412 (500-1¼)
CIRCLING	5980-1	452 (500-1)	5980-1½	6080-2 452 (500-1½) 552 (600-2)


REIL Rwy 1, 10 and 19
 MIRL Rwy 1-19
 HIRL Rwy 10-28

WAAS CH 61115 W28A	APP CRS 283°	Rwy Idg TDZE Apt Elev	8203 5456 5528
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 28


RIVERTON RGNL (RIW)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 38°C (100°F).
⚠ Inoperative table does not apply to LNAV Cat D. DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Lander altimeter setting.
 For inoperative MALSRL, increase LNAV-VNAV Cat D visibility ¼ mile. When local altimeter setting not received, use Lander altimeter setting and increase all DA 53 feet and all MDA 60 feet.
 For inoperative MALSRL when using Lander altimeter setting, increase LPV all Cats ½ mile, and LNAV/VNAV and LNAV Cat D visibility ¼ mile.


MALSRL


MISSED APPROACH: Climb to 7900 direct TIDHU and hold.

ASOS 121.425	SALT LAKE CENTER 133.25 285.6	UNICOM 122.8 (CTAF) 0
-------------------------------	--	--

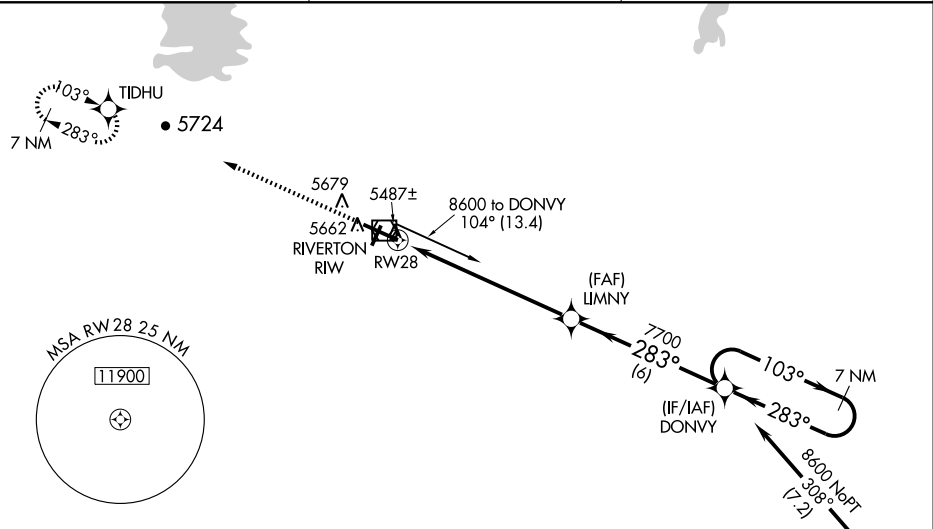

ELEV 5528

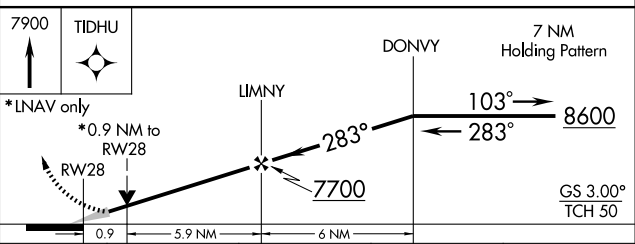

CATEGORY	A	B	C	D
LPV DA	5656-½ 200 (200-½)			
LNAV/VNAV DA	5706-½ 250 (200-½)		5706-¾ 250 (200-¾)	
LNAV MDA	5780-½ 324 (300-½)		5780-1 324 (300-1)	
CIRCLING	5980-1	452 (500-1)	5980-1½ 452 (500-1½)	6080-2 552 (600-2)

REIL Rwy 1, 10 and 19
 MIRL Rwy 1-19
 HIRL Rwy 10-28

NW-1. 08 APR 2010 to 06 MAY 2010

VOR/DME RIW 108.8 Chan 25	APP CRS 287°	Rwy Idg TDZE Apt Elev	8203 5456 5528
--	------------------------	-----------------------------	---

VOR RWY 28




RIVERTON RGNL (RIW)

▲ When local altimeter setting not received, use Lander altimeter setting and increase all MDA 60 feet and S-28 Cats C and D visibility ¼ mile. VDP NA when using Lander altimeter setting.

MALSRL
A5

MISSED APPROACH: Climb to 7700 in RIW VOR/DME holding pattern.

ASOS 121.425	SALT LAKE CENTER 133.25 285.6	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

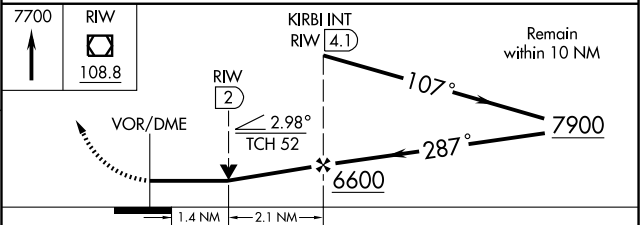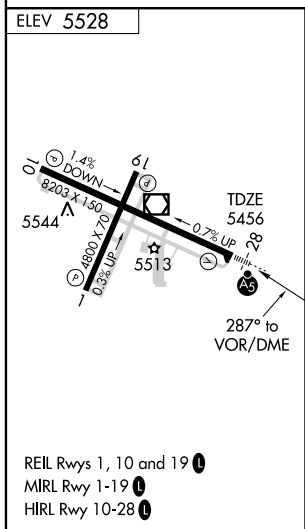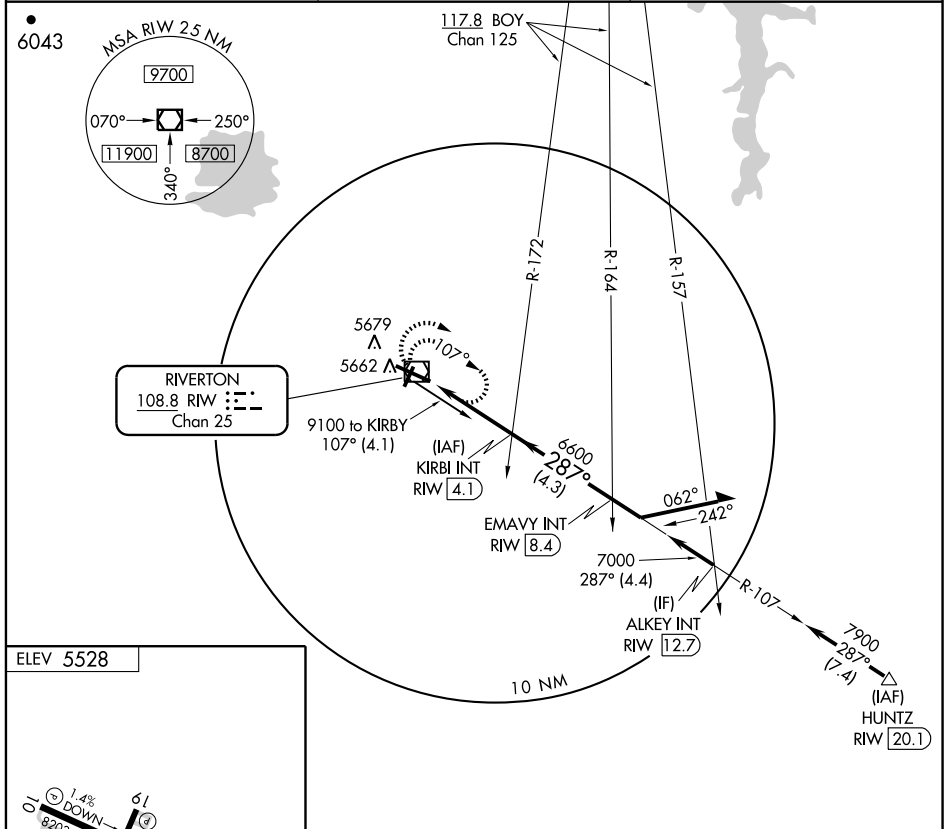

CATEGORY	A	B	C	D
S-28	5940-½ 484 (500-½)		5940-¾ 484 (500-¾)	5940-1 484 (500-1)
CIRCLING	5980-1 452 (500-1)		5980-1½ 452 (500-1½)	6080-2 552 (600-2)

NW-1, 08 APR 2010 to 06 MAY 2010

LOC/DME I-RKS 109.3 Chan 30	APP CRS 270°	Rwy Idg TDZE Apt Elev 10000 6764 6764
---	------------------------	---

ILS or LOC/DME RWY 27



ROCK SPRINGS-SWEETWATER COUNTY (RKS)

For inoperative MALSR, increase S-LOC 27 Cat. D visibility to 1 mile. Autopilot coupled approach NA below 7000. Glideslope unusable beyond 5 degrees left of course.





MISSED APPROACH: Climb to 7600, then climbing right turn to 9300 direct OCS VOR/DME and hold, continue climb-in-hold to 9300.

ASOS 118.375	CASPER RADIO 122.6	UNICOM 122.8 (CTAF) 0
------------------------	------------------------------	--

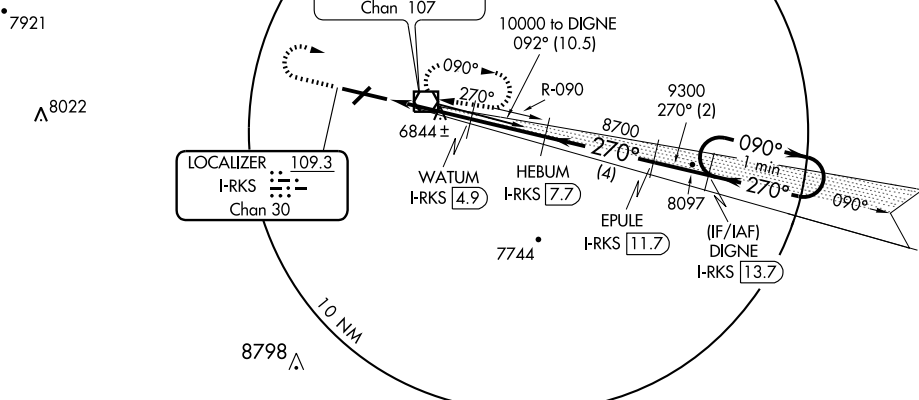

ELEV 6764

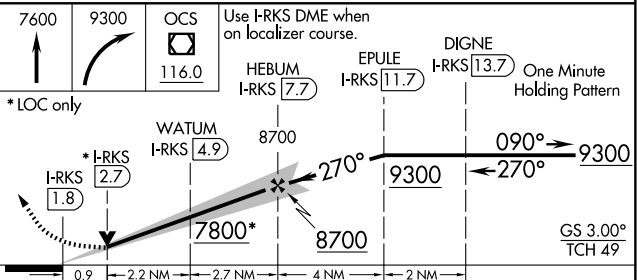

CATEGORY	A	B	C	D
S-ILS-27	6964-½ 200 (200-½)			
S-LOC 27	7100-½	336 (400-½)	7100-¾ 336 (400-¾)	
CIRCLING	7140-1 376 (400-1)	7220-1 456 (500-1)	7220-1½ 456 (500-1½)	7320-2 556 (600-2)

REIL Rwy 3 and 21 **0**
MIRL Rwy 3-21 **0**
HIRL Rwy 9-27 **0**

NW-1. 08 APR 2010 to 06 MAY 2010

RNAV (GPS) RWY 9

ROCK SPRINGS-SWEETWATER COUNTY (RKS)

WAAS CH 66016 W09A	APP CRS 090°	Rwy Idg TDZE Apt Elev	10000 6741 6764
---------------------------------	------------------------	-----------------------------	--

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -28°C (-18°C) or above 35°C (95°F). DME/DME RNP-0.3 NA.

ODALS




MISSED APPROACH: Climb to 9600 direct DIGNE and hold.

ASOS
118.375

CASPER RADIO
122.6


UNICOM
122.8 (CTAF)

• 8003

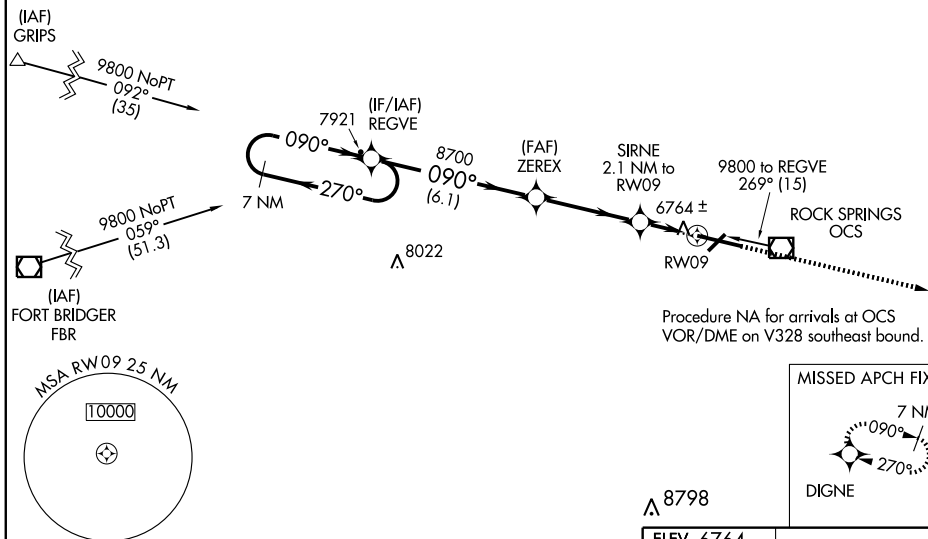


△ 8798

ELEV 6764

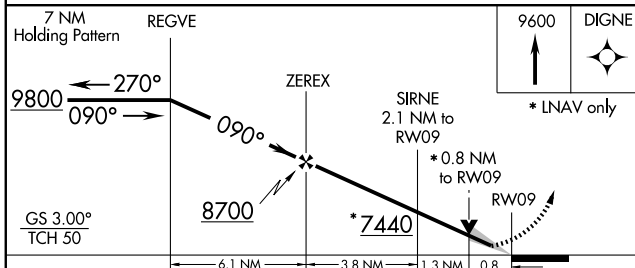

9600 DIGNE
* LNAV only



CATEGORY	A	B	C	D
LPV DA	6941-3/4 200 (200-3/4)			
LNAV/VNAV DA	7034-3/4 293 (300-3/4)		7034-1 293 (300-1)	
LNAV MDA	7040-3/4 299 (300-3/4)		7040-1 299 (300-1)	
CIRCLING	7140-1 376 (400-1)	7220-1 456 (500-1)	7220-1 1/2 456 (500-1 1/2)	7320-2 556 (600-2)

REIL Rwy 3 and 21
MIRL Rwy 3-21
HIRL Rwy 9-27

WAAS CH **49216** W**27A**
 APP CRS **270°**
 Rwy Idg **10000**
 TDZE **6764**
 Apt Elev **6764**

RNAV (GPS) RWY 27

ROCK SPRINGS-SWEETWATER COUNTY (RKS)

For inoperative MALSR, increase LNAV/VNAV Cat. D visibility to 1 mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -28°C (-18°F) or above 35°C (95°F). Inoperative table does not apply to LNAV Cat. D. DME/DME RNP-0.3 NA.

MALSR




MISSED APPROACH: Climb to 9800 direct REGVE and hold.

ASOS **118.375**

CASPER RADIO **122.6**

UNICOM **122.8** (CTAF)



MISSED APCH FIX

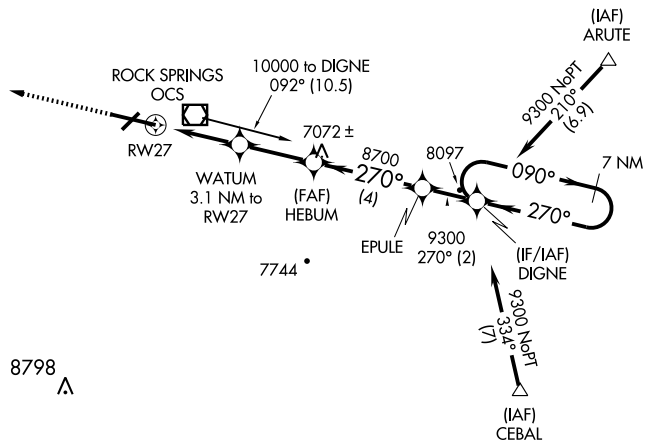

8798

ELEV 6764

Procedure NA for arrivals at OCS VOR/DME on V235 southwest bound.

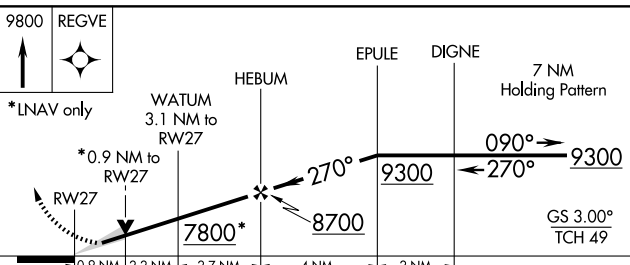

CATEGORY	A	B	C	D
LPV DA	6964-1/2		200 (200-1/2)	
LNAV/VNAV DA	7035-1/2	271 (300-1/2)	7035-3/4 271 (300-3/4)	
LNAV MDA	7100-1/2	336 (400-1/2)	7100-1 336 (400-1)	
CIRCLING	7140-1 376 (400-1)	7220-1 456 (500-1)	7220-1 1/2 456 (500-1 1/2)	7320-2 556 (600-2)

REIL Rwy 3 and 21
 MIRL Rwy 3-21
 HIRL Rwy 9-27


VOR/DME OCS 116.0 Chan 107	APP CRS 085°	Rwy Idg TDZE Apt Elev 10000 6741 6764
--	------------------------	---

VOR/DME RWY 9


ROCK SPRINGS-SWEETWATER COUNTY (RKS)

ASOS 118.375	CASPER RADIO 122.6	UNICOM 122.8 (CTAF) 0
------------------------	------------------------------	--



ODALS MISSED APPROACH: Climb to 9300 direct OCS VOR/DME and hold, continue climb-in-hold to 9300.

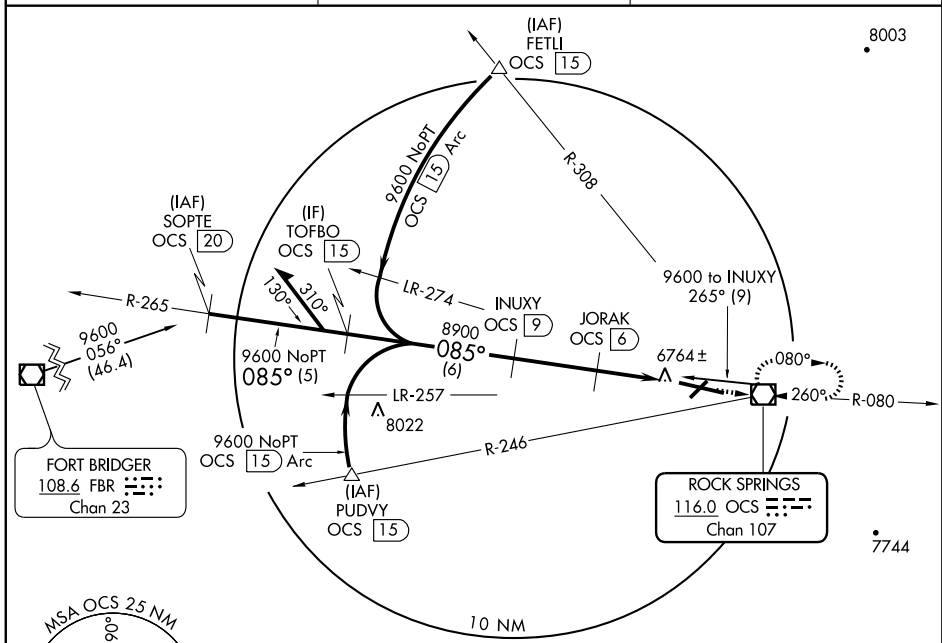

FORT BRIDGER
108.6 FBR
Chan 23



8798 ELEV 6764

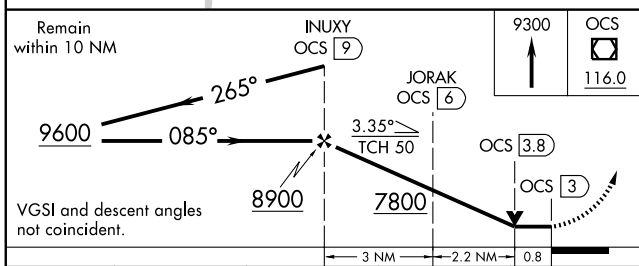

CATEGORY	A	B	C	D
S-9	7020- ³ / ₄ 279 (300- ³ / ₄)			7020-1 279 (300-1)
CIRCLING	7140-1 376 (400-1)	7220-1 456 (500-1)	7220-1 ¹ / ₂ 456 (500-1 ¹ / ₂)	7320-2 556 (600-2)

REIL Rwy 3 and 21 **0**
MIRL Rwy 3-21 **0**
HIRL Rwy 9-27 **0**

NW-1. 08 APR 2010 TO 06 MAY 2010


VOR/DME RWY 27

ROCK SPRINGS-SWEETWATER COUNTY (RKS)



VOR/DME OCS 116.0 Chan 107	APP CRS 255°	Rwy Idg TDZE Apt Elev 10000 6760 6760
--	------------------------	---

Inoperative table does not apply to Cat. D.	MALSR 	MISSED APPROACH: Climb to 7700, then climbing right turn to 9100 direct OCS VOR/DME and hold.
---	-----------	---

ASOS 118.375	CASPER RADIO 122.6	UNICOM 122.8 (CTAF) 0
------------------------	------------------------------	--

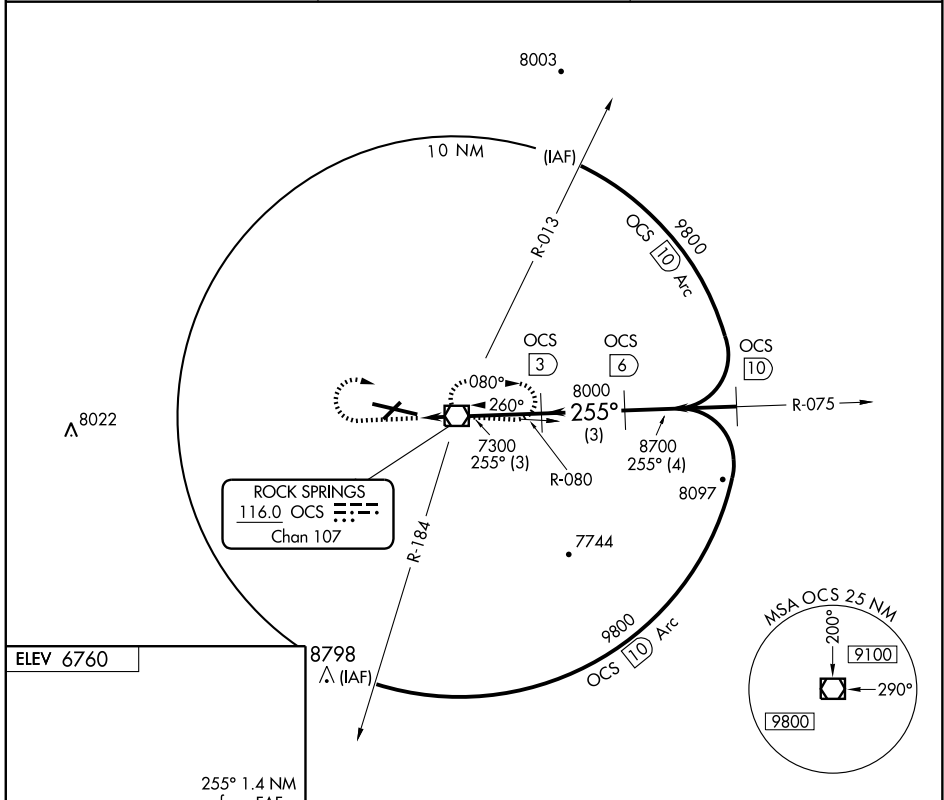

ELEV 6760

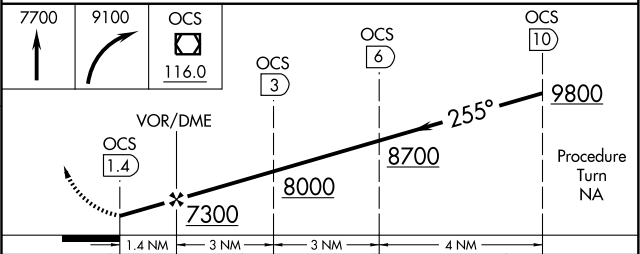

CATEGORY	A	B	C	D
S-27	7040-½ 280 (300-½)			7040-1 280 (300-2)
CIRCLING	7120-1 360 (400-1)	7220-1 460 (500-1)	7220-1½ 460 (500-1½)	7320-2 560 (600-2)





REIL Rwy 3 and 21 **0**
MIRL Rwy 3-21 **0**
HIRL Rwy 9-27 **0**

NDB SAA 266	APP CRS 150°	Rwy Idg TDZE Apt Elev N/A N/A 7012
-----------------------	------------------------	--

▲ NA If local altimeter setting not received, use Rawlins altimeter setting and increase all MDAs 280 feet.

MISSED APPROACH: Climbing right turn to 10,000 in SAA NDB holding pattern.

AWOS-3 118.175	DENVER CENTER 132.1 254.35	UNICOM 122.8 (CTAF) 0
--------------------------	--------------------------------------	---------------------------------

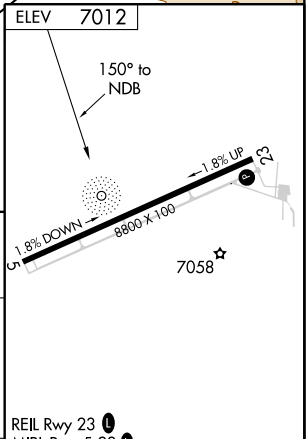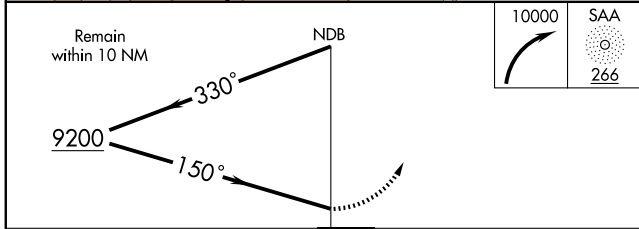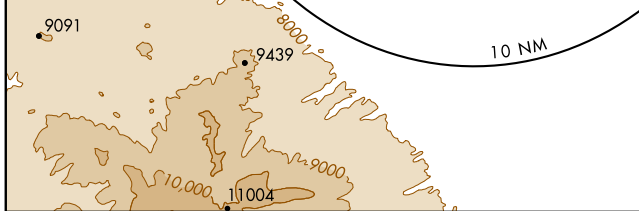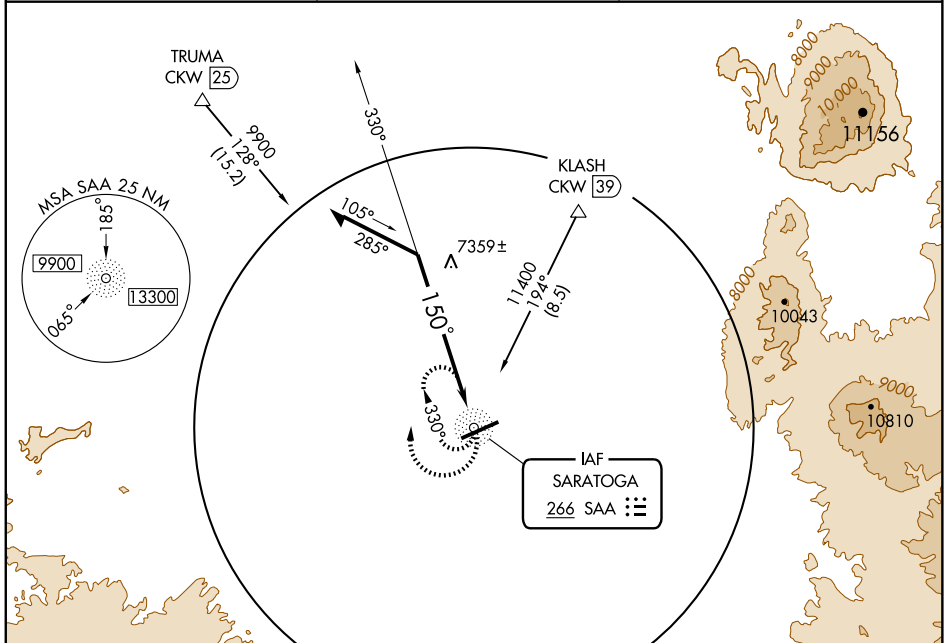

CATEGORY	A	B	C	D	Knots	60	90	120	150	180
CIRCLING	7720-1¼ 708 (800-1¼)		7720-2 708 (800-2)	7720-2¼ 708 (800-2¼)	Min:Sec					

NW-1. 08 APR 2010 to 06 MAY 2010

REIL Rwy 23 0
MIRL Rwy 5-23 0

ELEV	7012
150° to NDB	
1.8% DOWN	
1.8% UP	
8800 x 100	
7058	

RNAV (GPS)-B

SARATOGA/ SHIVELY FIELD (S.A.A.)




APP CRS 151°	Rwy Idg TDZE Apt Elev	N/A N/A 7012
------------------------	-----------------------------	---------------------------

NA DME/DME RNP -0.3 NA. If local altimeter setting not received, use Rawlins altimeter setting and increase all MDAs 280 feet.

MISSED APPROACH: Climbing right turn to 10,000 direct TRUMA and hold.

AWOS-3 118.175	DENVER CENTER 132.1 254.35	UNICOM 122.8 (CTAF)
--------------------------	--------------------------------------	-------------------------------

Procedure NA for arrival at NEDAE via V26 southbound.

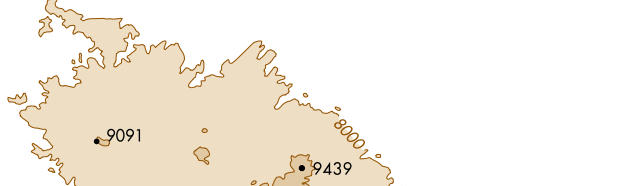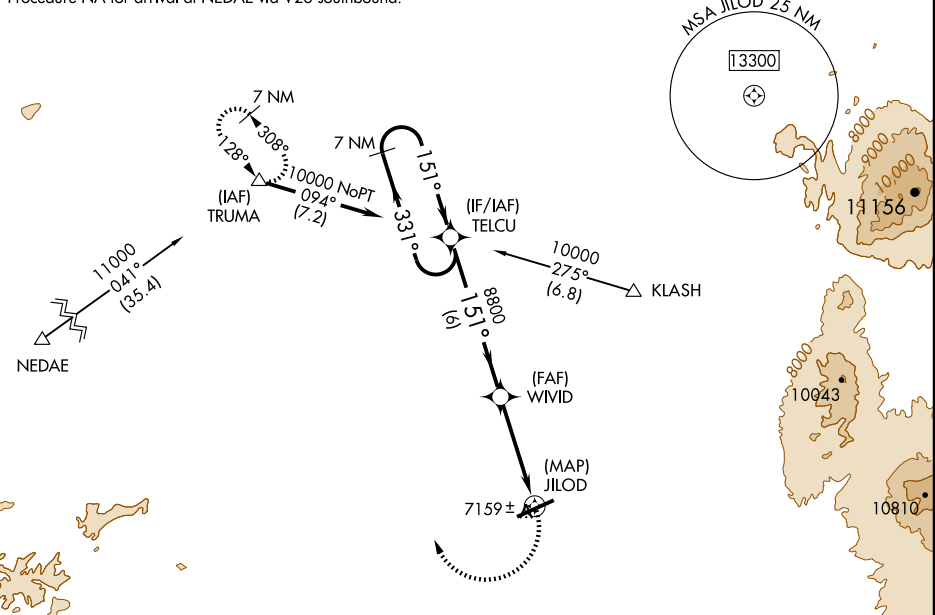

7 NM Holding Pattern	TELCU	WIVID	JILOD
10000	331°	151°	8800
	6 NM	4.1 NM	

CATEGORY	A	B	C	D
CIRCLING	7600-1	588 (600-1)	7620-1¾ 608 (700-1¾)	7620-2 608 (700-2)

REIL Rwy 23 **1**
MRL Rwy 5-23 **1**

RNAV (GPS) RWY 14




SHERIDAN COUNTY (SHR)

WAAS CH 81899 W14A	APP CRS 143°	Rwy Idg TDZE Apt Elev	8300 4014 4021
---------------------------------	------------------------	-----------------------------	---

⚠ DME/DME RNP -0.3 NA.
⚠ Baro-VNAV NA below -23°C (-9°F).
 When VGSI inoperative, circling Rwy 5 and 23 NA at night.
 If local altimeter setting not received, procedure NA.

MISSED APPROACH: Climb to 7000 direct CIVSA and via 067° track to HERKA and hold, continue climb-in-hold to 7000.

ASOS 135.175	SALT LAKE CENTER 127.75 351.9	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------------

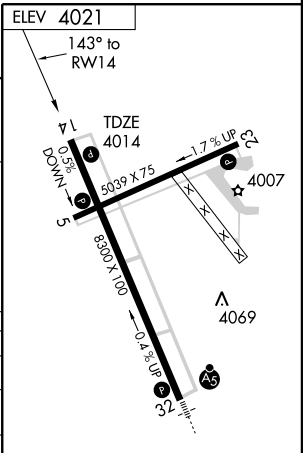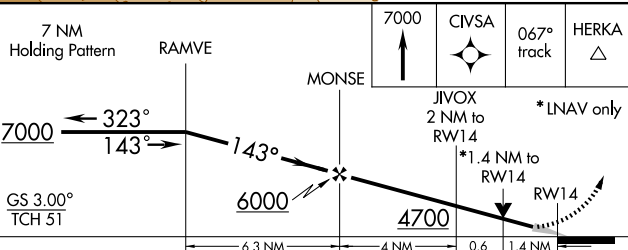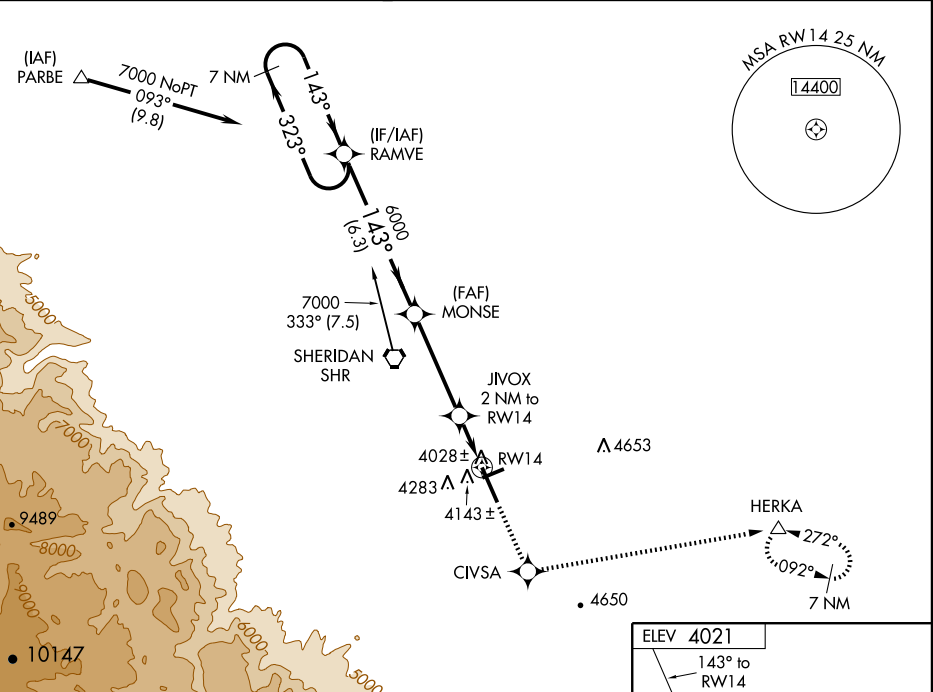

CATEGORY	A	B	C	D
LPV DA		4264-¾	250 (300-¾)	
LNAV/ VNAV DA		4419-1½	405 (400-1½)	
LNAV MDA	4500-1	486 (500-1)	4500-1¼ 486 (500-1¼)	4500-1½ 486 (500-1½)
CIRCLING	4580-1½ 559 (600-1½)	4600-1½ 579 (600-1½)	4620-1½ 599 (600-1½)	4740-2¼ 719 (800-2¼)


HIRL Rwy 14-32 **Ⓛ**
 MRL Rwy 5-23 **Ⓛ**
 REIL Rws 5, 14, and 23 **Ⓛ**


RNAV (GPS) RWY 32



SHERIDAN COUNTY (SHR)

WAAS CH 65699 W32A	APP CRS 323°	Rwy Idg TDZE Apt Elev 8300 3985 4021
--	------------------------	--



▼ DME/DME RNP-0.3 NA. Baro-VNAV NA below -23°C (-9°F).
▲ For inoperative MALSR, increase LPV visibility to ¾ all Cats.
 When VGSI inoperative, circling Rwy 5 and 23 NA at night.
 If local altimeter setting not received, procedure NA.

MALSR

MISSED APPROACH: Climb to 7000 direct HORLU and via 306° track to SHR VORTAC and hold, continue climb-in-hold to 7000.

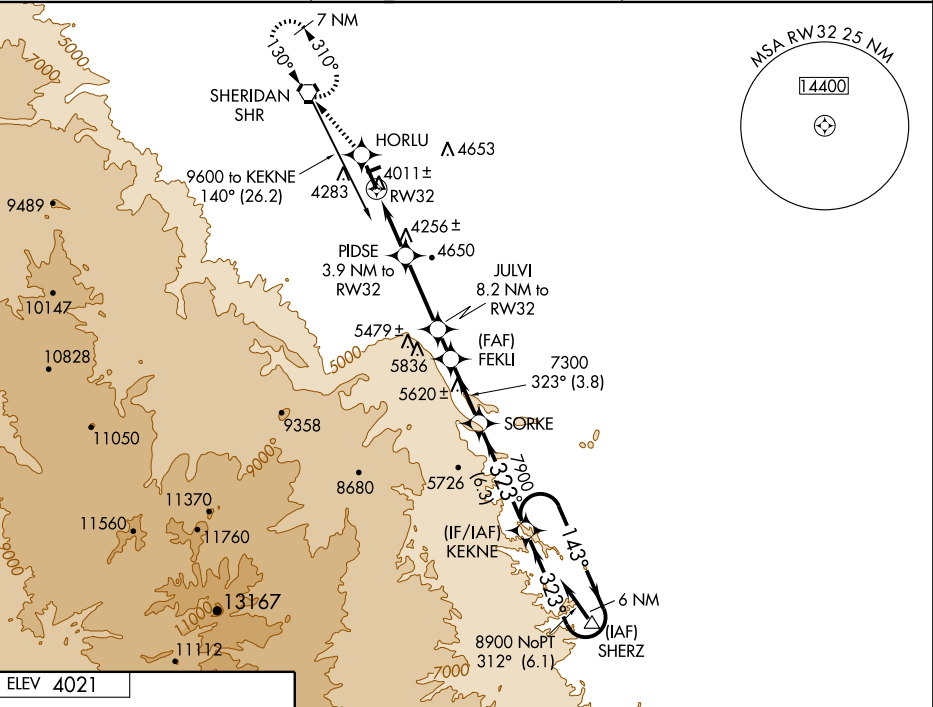ASOS 135.175	SALT LAKE CENTER 127.75 351.9	UNICOM 123.0 (CTAF) 
------------------------	---	---

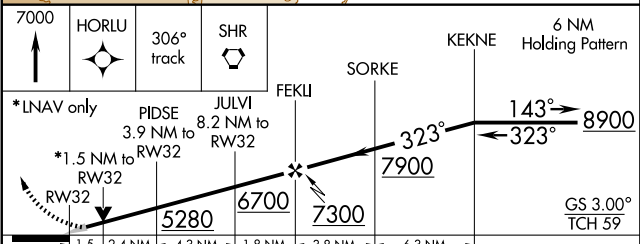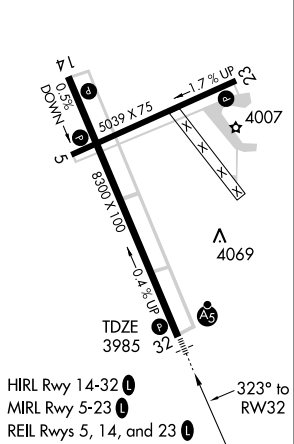

ELEV 4021



CATEGORY	A	B	C	D
LPV DA	4235-½		250 (300-½)	
LNAV/VNAV DA	4426-1 441 (500-1)			
LNAV MDA	4520-½	535 (500-½)	4520-1 535 (500-1)	4520-1¼ 535 (500-1¼)
CIRCLING	4580-1½ 559 (600-1½)	4600-1½ 579 (600-1½)	4620-1½ 599 (600-1½)	4740-2¼ 719 (800-2¼)

VORTAC SHR	APP CRS	Rwy Idg	8300
115.3	128°	TDZE	4014
Chan 100		Apt Elev	4021




VOR RWY 14

SHERIDAN COUNTY (SHR)

▲ If local altimeter setting not received, procedure NA.

MISSED APPROACH: Climbing left turn to 7000 direct SHR VORTAC and hold, continue climb-in-hold to 7000.

ASOS 135.175	SALT LAKE CENTER 127.75 351.9	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------------

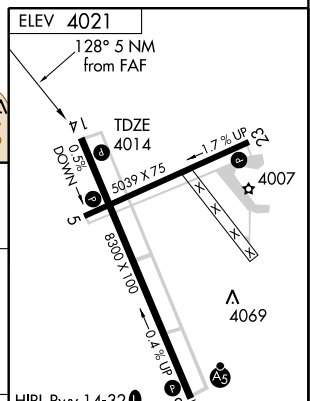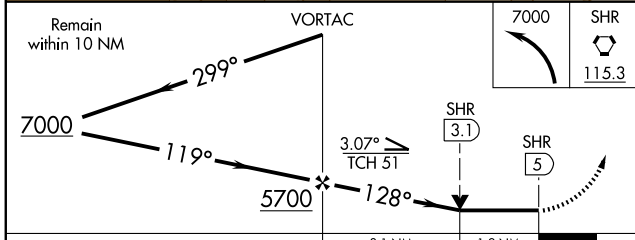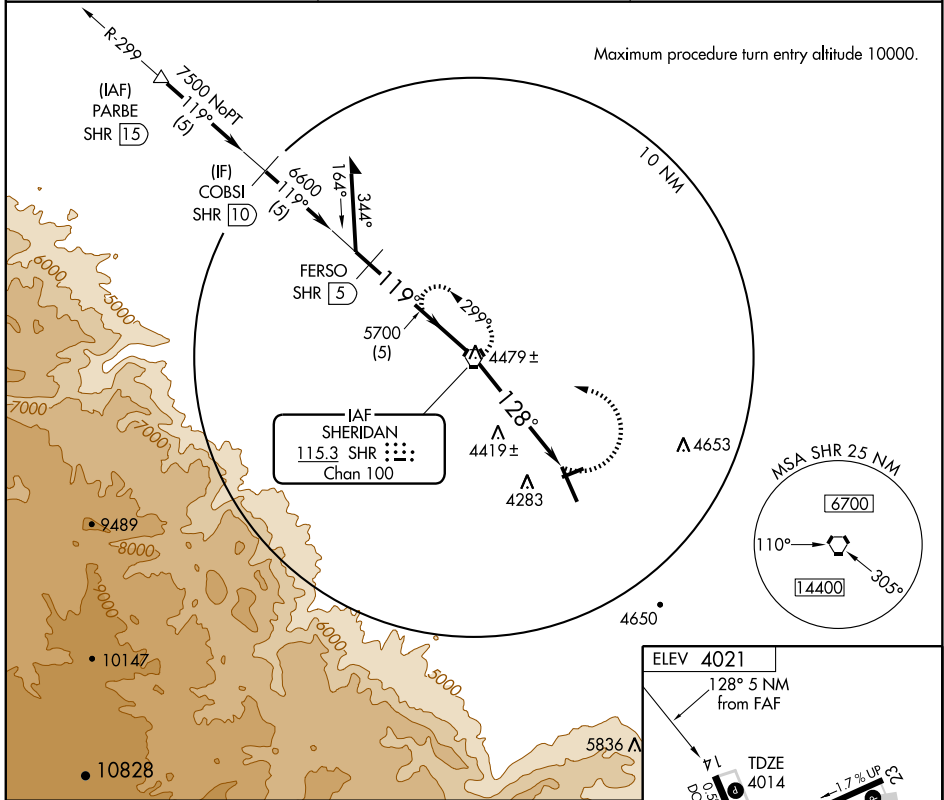

CATEGORY	A	B	C	D
S-14	4680-1 666 (700-1)		4680-1¾ 666 (700-1¾)	4680-2 666 (700-2)
CIRCLING	4680-1 659 (700-1)		4680-1¾ 659 (700-1¾)	4740-2¼ 719 (800-2¼)

HIRL Rwy 14-32 **1**
MIRL Rwy 5-23 **1**
REL Rws 5, 14, and 23 **1**

FAF to MAP 5 NM




Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

APP CRS	Rwy Idg	5703
104°	TDZE	4205
	Apt Elev	4205

▼
▲ NA

MISSED APPROACH: Climb to 6500 via 104° course to CIKSI WP and hold.

ASOS 118.375	DENVER CENTER 127.95 338.2	UNICOM 122.8 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

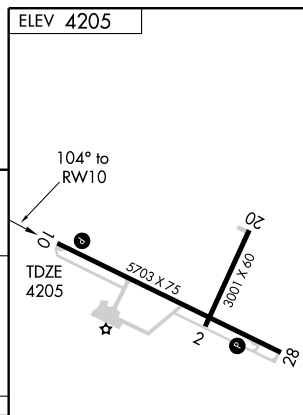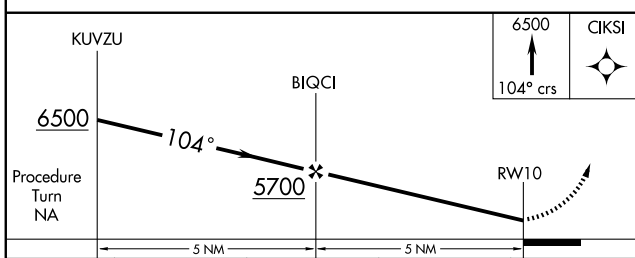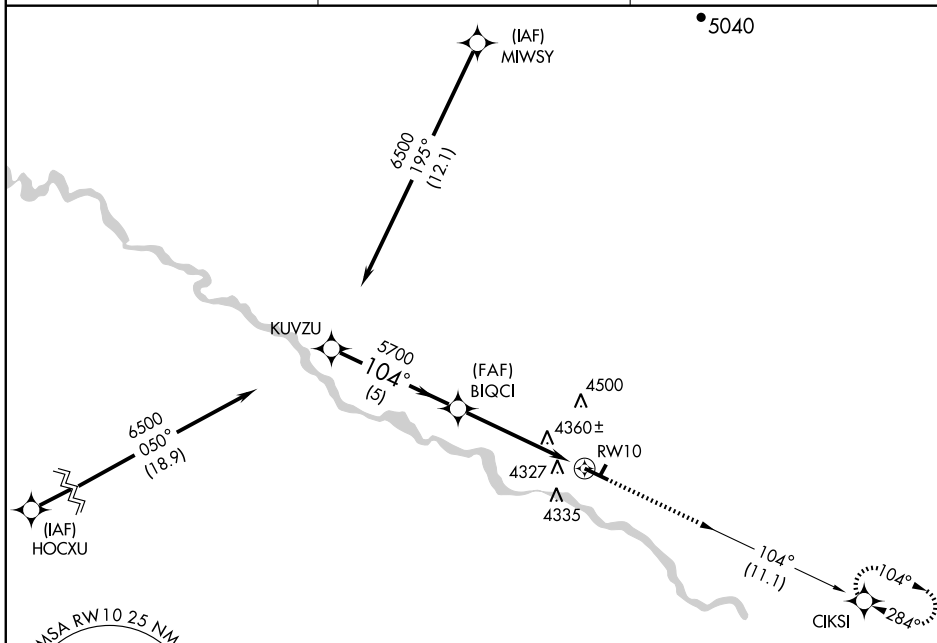

CATEGORY	A	B	C	D
S-10	4660-1	455 (500-1)	4660-1¼ 455 (500-1¼)	4660-1½ 455 (600-1½)
CIRCLING	4680-1	475 (500-1)	4680-1½ 475 (500-1½)	4820-2 615 (700-2)



REIL Rwy 10-28 0
MIRL Rwy 10-28 0

APP CRS	Rwy Idg	5703
284°	TDZE	4200
	Apt Elev	4205


▼
▲ NA

MISSED APPROACH: Climb to 6500 via 284° course to KUVZU WP and hold.


ASOS 118.375	DENVER CENTER 127.95 338.2	UNICOM 122.8 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

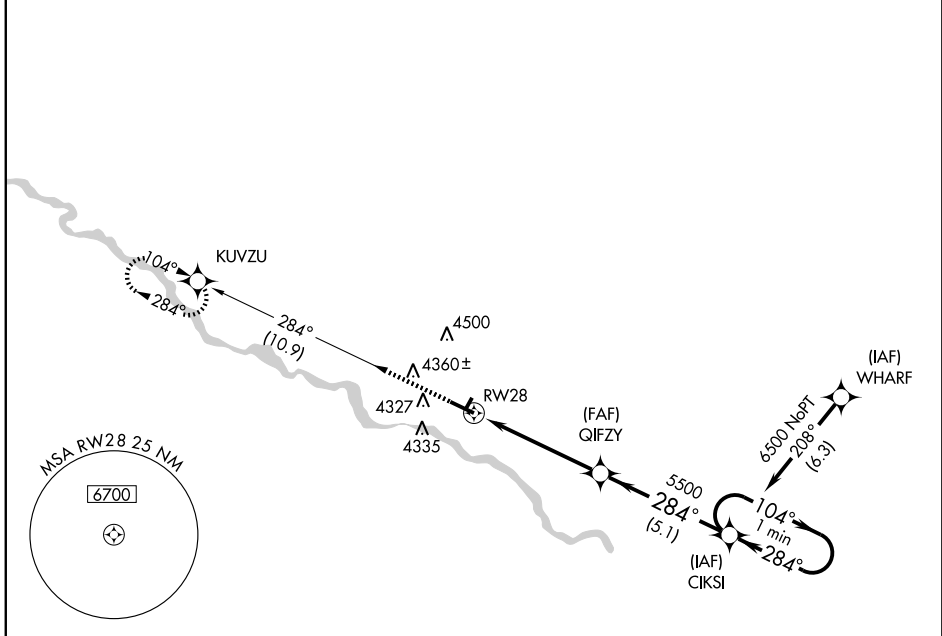

ELEV 4205

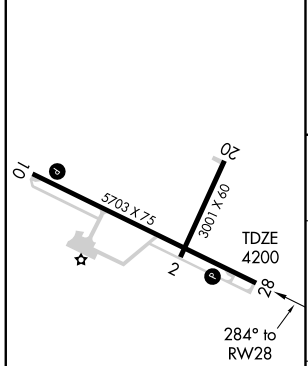

REIL Rwy 10-28 0
MIRL Rwy 10-28 0

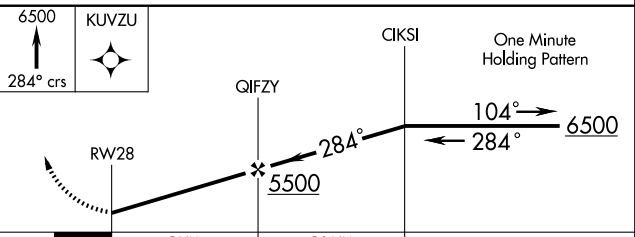

CATEGORY	A	B	C	D
S-28	4620-1	420 (500-1)	4620-1¼	420 (500-1¼)
CIRCLING	4680-1	475 (500-1)	4680-1½ 475 (500-1½)	4820-2 615 (700-2)

NDB TOR **293**
 APP CRS **095°**
 Rwy Idg TDZE **5703**
 Apt Elev **4205**

NDB RWY 10
 TORRINGTON MUNI (TOR)





▼
 ▲ NA

MISSED APPROACH: Climb to 6500 in TOR NDB holding pattern.

ASOS **118.375**

DENVER CENTER **127.95 338.2**

UNICOM **122.8** (CTAF) **1**

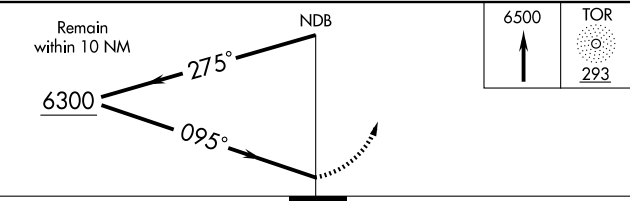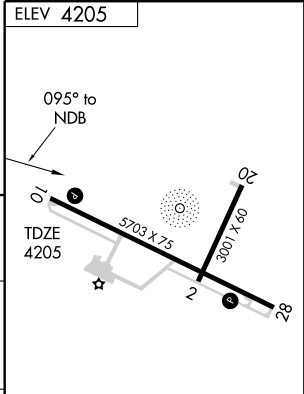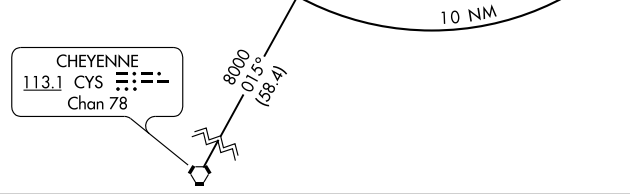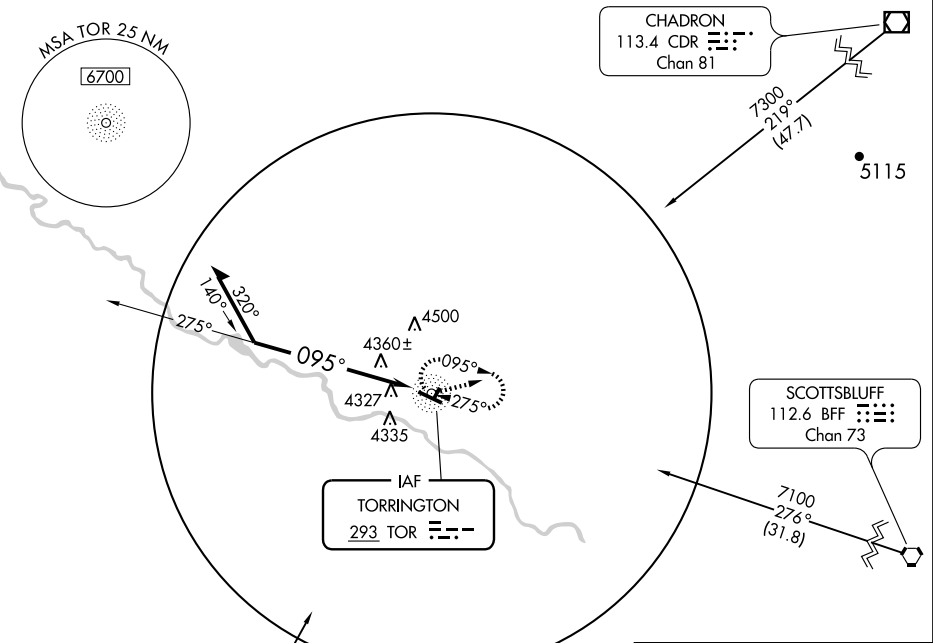

CATEGORY	A	B	C	D
S-10	4940-1 735 (800-1)		4940-2 735 (800-2)	4940-2¼ 735 (800-2¼)
CIRCLING	4940-1 735 (800-1)		4940-2 735 (800-2)	4940-2¼ 735 (800-2¼)

REIL Rwy 10-28 **1**
 MIRL Rwy 10-28 **1**

NDB RWY 28




TORRINGTON MUNI (TOR)

NDB TOR 293	APP CRS 295°	Rwy Idg TDZE Apt Elev	5703 4200 4205
-----------------------	------------------------	-----------------------------	---

▼
▲ NA

MISSED APPROACH: Climb to 6500 in TOR NDB holding pattern.

ASOS 118.375	DENVER CENTER 127.95 338.2	UNICOM 122.8 (CTAF)
------------------------	--------------------------------------	-------------------------------

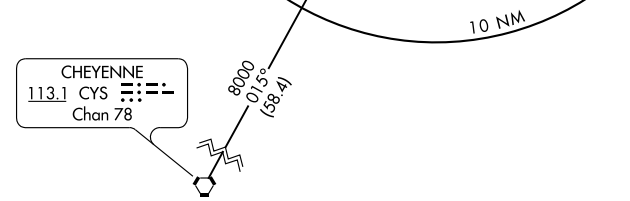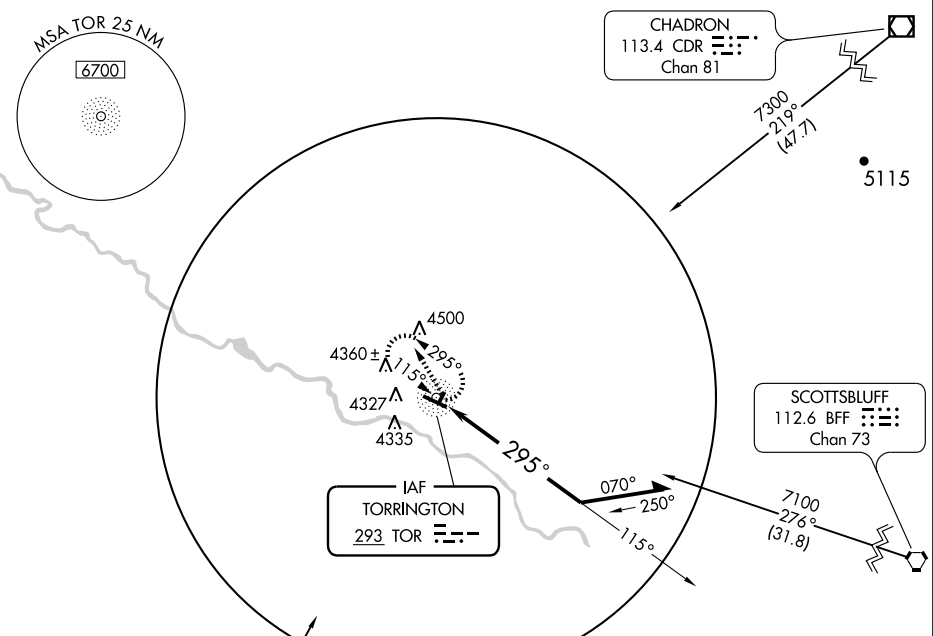

CATEGORY	A	B	C	D
S-28	4720-1	520 (600-1)	4720-1½ 520 (600-1½)	4720-1¾ 520 (600-1¾)
CIRCLING	4720-1	515 (600-1)	4720-1½ 515 (600-1½)	4820-2 615 (700-2)

REIL Rwy 10-28

MIRL Rwy 10-28

APP CRS	Rwy Idg	N/A
260°	TDZE	N/A
	Apt Elev	4774

RNAV (GPS)-A



WHEATLAND/ PHIFER AIRFIELD (E.A.N)

▼ DME/DME RNP- 0.3 NA. Visibility reduction by helicopters NA.
▲ NA Use Torrington altimeter setting; when not received, use Western Neb. Rgnl/William B. Heilig Field altimeter setting and increase all MDAs 100 feet and visibility Cats B/C ¼ mile.
 Procedure NA at night.



MISSED APPROACH: Climbing right turn to 9000 direct JEZZY and hold, continue climb-in-hold to 9000.

DENVER CENTER
135.6 385.6

CTAF
122.9

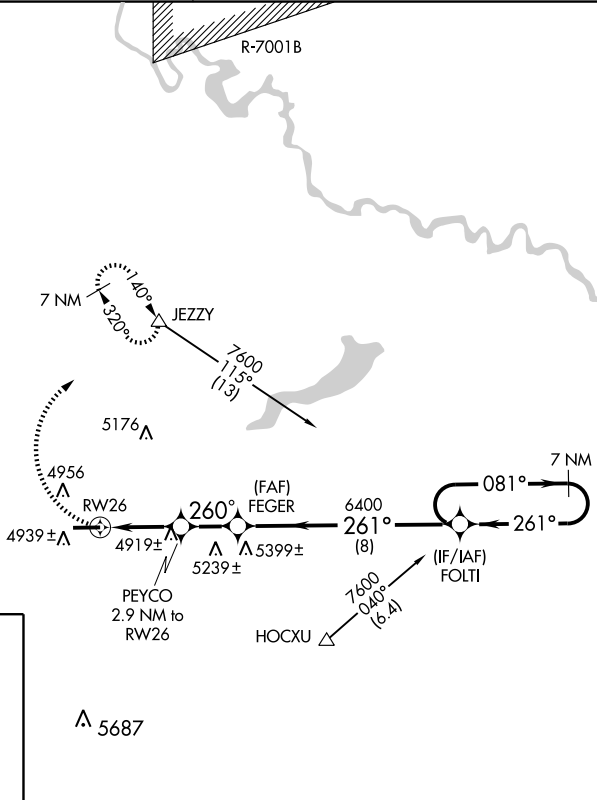

ELEV 4774

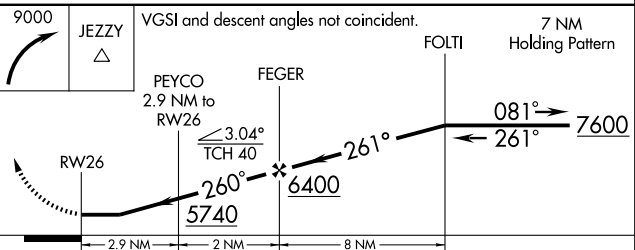

CATEGORY	A	B	C	D
CIRCLING	5440-1 666 (700-1)	5460-1 686 (700-1)	5460-2 686 (700-2)	NA

MIRL Rwy 8-26

NW-1. 08 APR 2010 to 06 MAY 2010

